

40-000 SERIES FREEZE PROTECTION VALVE

Job Name:	Contractor:
Job Location:	P.O. Number:
Engineer:	Representative:
Tag:	Wholesale Distributor:

ISO 9001:2008

DESCRIPTION

The Apollo[®] 40-000 Series Freeze Protection Valve shall be installed to protect backflow preventers from freezing when installed in accordance with manufacturer's instructions. This valve will be American-manufactured with all internal parts replaceable.

FEATURES

- · Corrosion resistant
- 1/4" MNPT inlet port
- Installs easily on all backflow preventers
- Discharge port accommodates 5/8" I.D. hose
- Compact, patented design (US # 6,374,849)
- MADE IN THE USA

MATERIAL SPECIFICATIONS


Part Name	Material	
Body	Bronze	
Сар	Brass	
Springs Guide	Brass	
Spring	Stainless Steel	
Cap O-Ring	Buna-N	
Guide O-Ring	Buna-N	
Thermal Element	Copper/Stainless Steel/EPDM	

PERFORMANCE RATING

Operating Pressures 20 - 175 psi Temperature Range 33 °F – 180 °F Nominal Start to Open Temperature 35 °F

APPROVALS

IAPMO listed

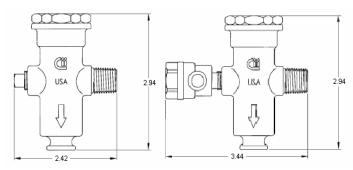

Model Number	40-000-FPV1	40-000-FPV2 w/ test cock
Net Weight (lbs.)	0.7	0.77



ORDERING INFORMATION

40-000-FPVX

OPTIONS —

OPTIONS

☐ 1 – ½" NPT plug

☐ 2 – With Apollo® test cock (¼" FNPT connection)


☐ R – Repair kit¹ for FPV1 and FPV2

Note:

¹Repair kit includes: Thermal element, spring, spring guide and two O-rings (all internal parts)

Example: 40-000-FPV1 = $\frac{1}{4}$ " male pipe thread inlet port $\frac{1}{8}$ " NPT plug.

TYPICAL INSTALLATION



Conbraco Industries, Inc. 701 Matthews Mint Hill Rd. Matthews NC 28105 USA; www.apollovalves.com; 704-841-6000