

# FLOMATIC® VALVES

High Quality Valves Built To Last...



## 2021 PRICE LIST

Effective January 11<sup>th</sup>, 2021



**VALVE PRODUCTS FOR MUNICIPAL, WATER WELL,  
IRRIGATION, AND INDUSTRIAL APPLICATIONS**

Fromatic is a valve manufacturer certified under ISO 9001-2015 and ISO 14001-2015 quality and environmental systems.



**NEW**

### **New Stainless Steel Ball Check Valves 3" through 6" Sizes, AIS Compliant**

We introduce new sizes on our Model 408S6 Ball Check Valve that meets AWWA standard C508. The Model 408S6 valve body features an all 316 Stainless Steel body and access port. These valves are designed to meet demanding wastewater lift stations and industrial applications. Now available in 3", 4" and 6" sizes, the Model 408S6 meets the standards as set forth in the "American Iron and Steel Act (AIS)".

[SEE PAGE 13](#)



**NEW**

### **Extended AWWA C508 Swing Check Valves New 3" & 10" Sizes, AIS Compliant Model 92**

We are proud to announce the expansion of the growing AWWA Swing Check Valve family with the new 3" and 10" American Iron and Steel (AIS) compliant Model 92. The Model 92 Swing Check Valve is now available in a size range of 3" through 10". Additional AIS type valves and sizes from 3" thru 30" for water and wastewater applications are available. The Model 92 is designed in accordance to the AWWA C508 standard.

[SEE PAGE 11](#)



**NEW TRAINING CENTER**



**NEW R&D LAB**



**NEW**

### **Extended Submersible Pump Check Valves New 10" Size on Model 80DI-VFD**

We have expanded our American Iron and Steel (AIS) compliant Model 80DIVFD submersible pump check valve model with a new 10" size. Our new special patented flow efficient submersible pump check valve is now available in a size range of 1" thru 10" for use with variable-frequency drive (VFD) control submersible pumps or conventional systems. Standard check valves may "chatter" and be noisy when a VFD goes to low flow, causing premature wear and eventual failure.

[SEE PAGE 4](#)



**NEW**

### **Flow Control Valves Flo-Trol® CD900 New Sizes and GPM's**

We have expanded the product offering on our Flo-Trol® automatic flow control valves now from 3/8" through 2" size and flow ranges from 0.25 to 30 GPM.


Designed to give constant flow over a wide pressure range. The valve is designed in a stainless steel construction and has no moving parts; rather a self-cleaning flexible orifice that varies in size with applied pressure so that a constant flow rate is maintained, NSF/ANSI 61 Certified.


[SEE PAGE 27](#)





# TABLE OF CONTENTS


## VALVES BY TYPE



	<b>AIR RELEASE/ VACUUM</b>	<b>PAGE</b>
	Auto-Drain - Model 70	1
	Auto-Vac® - Model 77	13
	Backflush	32
	Comboair®, Sewair®	31, 32
	Miniair®, Maxiair®, Wellair®	31


	<b>AUTOMATIC CONTROL VALVE</b>	<b>PAGE</b>
	Altitude	
	C201, CF201,	
	C205, CF205	22
	Back Pressure	
	C301, CF301	22
	Cycle Gard® - CB152E, CB152SST	
	C153S6, CI, CN, C152E	29, 30
	Float Valve	
	C701, CF701	23
	Flo-Trol®	27
	Flow Control	
	C901, CF901	24
	Hydraulic Check	
	C1001, CF1001	24
	Pressure Reducing	
	C101, CF101, C150E	22, 28
	Pressure Relief	
	C401, CF401	23
	Pump Control	
	C621	23
	Solenoid Actuated	
	C801-2, CF801-2	24
	Surge Arrestor	
	C501, CF501	23


	<b>BACKFLOW PREVENTERS</b>	<b>PAGE</b>
	Hose Connection Vacuum Breaker	
	GFHB8	33
	Dual Check Valve, GF8080E,	
	GF8080S6	33
	Dual Check Valve w/ Atmos. Vent	
	GF8200	33


	<b>STAINLESS STEEL BALL VALVES</b>	<b>PAGE</b>
	(Quarter Turn)	
	SS Ball Valves	24

	<b>BUTTERFLY VALVES</b>	<b>PAGE</b>
	Azure® AWWA C504	15
	Sylax®3 Wafer & Lug Style	16
	Sylax®3 Butterfly Valves	16
	Sylax®3 Electric Actuated	16

	<b>BREAK-OFF PLUGS</b>	<b>3, 4</b>
	DRAIN-BACK	4
	<b>CHECK VALVES</b>	<b>PAGE</b>
	Auto Drain	1
	Ball Check	
	508, 508S6, 408, 408S6 ,	
	208, 208T/S	13
	Globe Style Silent Check	
	402BT/R/STR, 402S6/R	9,10
	Hydraulic Check	
	C1001, CF1001	24
	Submersible Check	
	80E, 80HTE, 100DPE, 100E,	
	100MEVFD, 100ME	1
	80EVFD, 100EVFD,	
	80AE, 80AEVFD, 80BE, 80BEVFD	
	80CEVFD, 80XBEVFD	2
	80MDW-VFD, 82DI8R-VFD	3
	80DIVFD, 80DI, 80DIX,	
	80DIVFD, 80MDIVFD, 100MDI	
	SLIM LINE®, 82DP, 80DICLVFD	5
	80SS, 100SS, 100SSVFD	
	80SSVFD, 80SSBVFD, 80SSCVFD,	
	80SSXBVFD	6
	80S6, 80S6VFD, 82S6VFD	
	80MS6FD, 100MSS, 100XLSS	7
	80S6CLVFD, 80S6MCLVFD	8
	Swing Check	
	78, 78A, 90/92, 93	11
	745, 745ASC 745BF/PI, 745BFPI	12
	Wafer & SS Check	
	816, 816FL, 816HS	8
	Split Disc®, 888, 888S6	
	812X, 888VFD, 888S6VFD	9, 10

	<b>FOOT VALVES</b>	<b>PAGE</b>
	60SE, 100MP, 333, 190,	
	290P, 297D, 124P, 104	18
	63, 812XTF, 80S6VFD, 302BT,	
	302S6, 333SS, 345, 357	19

	<b>GATE &amp; PLUG VALVES</b>	<b>PAGE</b>
	NRS AWWA C515, C509,	
	OS&Y AWWA C509	34
	Plug Valves	14

	<b>STRAINERS</b>	<b>PAGE</b>
	16, 16FL	20
	6P, 6SS, 46, 46T, 6SE	20
	Y Strainers	20

## VALVES BY MATERIAL

<b>CAST IRON</b>	<b>PAGE</b>
Air Release/Vacuum	31, 32
Ball Check	13
Foot Valve	18
Globe Style Silent Check	10
Strainer	20
Swing Check	11
Y-Strainers	20

<b>DUCTILE IRON</b>	<b>PAGE</b>
Butterfly Valve	15, 16
Control Valve	21 - 26
Plug Valves	14
Submersible Check Valves	3 - 5
Swing Checks	11, 12
Wafer Check	10

<b>PLASTIC</b>	<b>PAGE</b>
Ball Check	13
In-line Check	18
Insert Check	18
Foot Valves	18
Strainers	20
Submersible Check	18

<b>STAINLESS STEEL</b>	<b>PAGE</b>
Foot Valve	19
Strainers	20
Submersible Check	6 - 8
Wafer/Globe Check	9

<b>UNLEADED BRONZE</b>	<b>PAGE</b>
Foot Valves	18
In-line Check	1, 2
Strainers	20
Submersible Check	1, 2
Y-Strainers	20

<b>CONDITIONS OF SALE</b>	<b>36</b>
<b>SALES AGENTS</b>	<b>35</b>

Go to [www.flomatic.com](http://www.flomatic.com) and type the model number in the search

Product/Site Search 

## CONTACT FLOMATIC

Do you need help finding the right product for your application?  
Our Customer Service Representatives are ready to help you choose the right valve for you.

**CALL 800.833.2040**

**80E** Discount Code **A**



**80E - ENVIRO CHECK®** body casting unleaded bronze with threaded female connections. This valve features a non-spin acetel (1/2" - 2") or unleaded bronze (2 1/2" - 4") poppet with a NITRILE (Buna-N) seal and a stainless steel spring.

Temp Max: 180 °F (80 °C) Pressure Max: 400 PSI

SIZE	PART NO.	WGT.	CASE QTY.	LIST PRICE
1/4"*	5118E*	.2	10	\$ 67.51
3/8"*	5159E*	.2	10	\$ 67.87
1/2"	4029E	.2	100	\$ 49.38
3/4"	4030E	.7	100	\$ 49.98
1"	4031E	1.3	50	\$ 52.13
1 1/4"	4032E	1.6	36	\$ 72.33
1 1/2"	4033E	2.5	25	\$ 101.00
2"	4034E	3.1	16	\$ 163.00
2 1/2"***	4035E**	6.5		\$ 698.00
3"***	4036E**	13		\$ 843.00
4"***	4037E**	24		\$1,459.00

\* Pressure Max 200 PSI  
 \*\* Unleaded bronze poppet, 2 1/2" and larger are recommended for vertical applications. See 80EVFD or 80DI-VFD for Horizontal.

**100ME** Discount Code **A**



**100ME - ENVIRO CHECK®** body casting unleaded bronze with threaded male x female connection. Hex shaped body for easy wrenching, this valve features a non-spin acetel poppet with a NITRILE (Buna-N) seal and stainless steel spring.

Temp Max: 180 °F (80 °C) Pressure Max: 400 PSI

SIZE	PART NO.	WGT.	CASE QTY.	LIST PRICE
1 1/4"M x 1"F	4221LE	1.4	50	\$ 54.60
1 1/4"M x 1 1/4"F	4242E	1.5	50	\$ 71.00
1 1/2"M x 1 1/4"F	4223E	1.5	36	\$ 103.00
2"M x 2"F	4079E	2.5	16	\$ 169.00

**100DPE** Discount Code **A**



**100DPE - ENVIRO CHECK®** body casting unleaded bronze, dual purpose check valve, stainless steel spring and non-spin acetel poppet. 1 1/4" male and 1" female threads on both ends with a NITRILE (Buna-N) seal.

Temp Max: 180 °F (80 °C) Pressure Max: 400 PSI

SIZE	PART NO.	WGT.	CASE QTY.	LIST PRICE
1 1/4"M & 1"F	4231E	1.1	50	\$ 61.95

**100E** Discount Code **A**



**100E - ENVIRO CHECK®** body casting unleaded bronze. Hex shaped on body for easy wrenching, this valve features a non-spin acetel poppet with a NITRILE (Buna-N) seal and stainless steel spring.

Temp Max: 180 °F (80 °C) Pressure Max: 400 PSI

SIZE	PART NO.	WGT.	CASE QTY.	LIST PRICE
1"	4201E	1.1	50	\$ 49.44
1"*	4201LE*	1.2	50	\$ 54.59
1 1/4"	4202E	1.4	36	\$ 71.42

\* Longer threads



**100MEVFD** Discount Code **A**



**100MEVFD - ENVIRO CHECK®** body casting unleaded bronze with threaded male x female connection. The valve features a high strength patented guide, poppet and spring with a NITRILE (Buna-N) seal.

Temp Max: 180 °F (80 °C) Pressure Max: 400 PSI

SIZE	PART NO.	WGT.	CASE QTY.	LIST PRICE
1"M x 1"F	4071EVFD	.7	50	\$ 64.90
1 1/4"M x 1"F	4221EVFD	1.4	50	\$ 64.92
1 1/4"M x 1 1/4"F	4242EVFD	1.5	50	\$ 86.00
1 1/2"M x 1 1/4"F	4223EVFD	1.5	36	\$ 126.00

**100XLE** Discount Code **A**



**100XLE - ENVIRO CHECK®** body casting unleaded bronze. Hex shaped body for easy wrenching, this valve features a non-spin acetel poppet with a NITRILE (Buna-N) seal and stainless steel spring. Features extra long threads for bell end special PVC drop pipe.

Temp Max: 180 °F (80 °C) Pressure Max: 400 PSI

SIZE	PART NO.	WGT.	CASE QTY.	LIST PRICE
1"M x 1"F	4201XLE*			DISCONTINUED*
1 1/4"M x 1 1/4"F	4242XLE	2	36	\$ 81.77

\*SEE PAGE 7 FOR STAINLESS STEEL VERSION

**80HTE** Discount Code **A**



**80HTE - ENVIRO CHECK®** body casting unleaded bronze with threaded female connections. Features a high temperature stainless steel poppet and a VITON seal with a stainless steel spring. Ideal for hot water applications.

Temp Max: 400 °F (200 °C) Pressure Max: 100 PSI\*

SIZE	PART NO.	WGT.	LIST PRICE
3/4"	4030HTE	.8	\$ 94.00
1"	4031HTE	1.4	\$ 95.00
1 1/4"	4032HTE	1.7	\$ 129.00
1 1/2"	4033HTE	2.7	\$ 172.00
2"	4034HTE	4.0	\$ 233.00
2 1/2"	4035HTE	6.5	\$ 776.00
3"	4036HTE	13	\$ 921.00
4"	4037HTE	25	\$ 1,677.00

\* At high temps the pressure rating is derated to 100 PSI, valve will take higher pressure at lower temps

**70** Discount Code **A**



**70 - Auto-Drain** - This 1" valve is available in stainless steel and PVC. All internal parts are engineered composite with a stainless steel disc and resilient seat.

Temp Max: 180 °F (80 °C) Pressure Max: 400 PSI

**5 PSI - open pressure - standard**

MATERIAL	PART NO.	CASE QTY.	LIST PRICE
PVC	4501PX	12	\$ 49.00
Stainless	4501SSX	12	\$ 58.00

**10 PSI - open pressure - optional**

MATERIAL	PART NO.	CASE QTY.	LIST PRICE
PVC	4501P	12	\$ 49.00
Stainless	4501SS	12	\$ 58.00

Note: 10 PSI spring require minimum 5 gpm to close. For lower flows or long horizontal runs use standard 5 PSI.

**VISIT OUR WEBSITE AT  
 WWW.FLOMATIC.COM  
 OR CALL 800.833.2040**

**80EVFD/100EVFD** Discount Code **A**



**80EVFD/100EVFD - ENVIRO CHECK®** body casting unleaded bronze with threaded female connections. 80 style has hex on both ends and 100 style has hex on body for easy wrenching. The valve features a high strength patented guide and poppet and spring with a NITRILE (Buna-N) seal.

Temp Max: 180 °F (80 °C) Pressure Max: 400 PSI

SIZE	PART NO.	STYLE	WGT.	CASE QTY.	LIST PRICE
------	----------	-------	------	-----------	------------

Composite Poppet & Guide

1"	4201EVFD	100	1	50	\$ 61.69
1"	4031EVFD	80	1	50	\$ 65.00
1 1/4"	4202EVFD	100	1.4	36	\$ 86.00
1 1/4"	4032EVFD	80	1.4	36	\$ 88.20
1 1/2"	4033EVFD	80	2.5	25	\$ 123.90

Stainless Poppet & Composite Guide

1"	4201ESVFD	100	1	50	\$ 67.86
1"	4031ESVFD	80	1	50	\$ 71.55
1 1/4"	4202ESVFD	100	1.4	36	\$ 94.72
1 1/4"	4032ESVFD	80	1.4	36	\$ 97.00
1 1/2"	4033ESVFD	80	2.5	25	\$ 137.00
2"*	4034EVFD*	80	3	16	\$ 199.00
2 1/2"*	4035EVFD*	80	6.5		\$ 845.00

Stainless Poppet & Guide

2"	4034ESVFD	80	3.0	16	\$ 219.00
2 1/2"	4035ESVFD	80	6.5		\$ 930.00
3"	4036EVFD	80	13		\$ 1,021.00
4"	4037EVFD	80	24		\$ 1,777.00

\*For horizontal installation see 4034ESVFD & 4035ESVFD.

**80CEVFD** Discount Code **A**



**80CEVFD - ENVIRO CHECK®** body casting unleaded bronze with threaded female connections. The valve features a high strength patented guide, poppet and spring with a NITRILE (Buna-N) seal. Control center with four tapping; one 3/8" inlet side, two 1/4" outlet sides, one 1/8" outlet side with a brass plug.

Temp Max: 180 °F (80 °C) Pressure Max: 400 PSI

SIZE	PART NO.	WGT.	CASE QTY.	LIST PRICE
------	----------	------	-----------	------------

1"	4061EVFD	1.2	50	\$ 79.00
1 1/4"	4062EVFD	1.8	36	\$ 103.00
1 1/2"	4063EVFD	2.7	25	\$ 131.00
2"	4064E	3.1	16	\$ 215.00

**80AE/80AEVFD** Discount Code **A**



**80AEVFD - ENVIRO CHECK®** body casting unleaded bronze with threaded female connections. The valve features a high strength patented guide, poppet and spring with a NITRILE (Buna-N) seal. This valve has a 1/2" drilled and tapped hole on the inlet side.

Temp Max: 180 °F (80 °C) Pressure Max: 400 PSI

SIZE	PART NO.	WGT.	CASE QTY.	LIST PRICE
------	----------	------	-----------	------------

1"	4041E	1.2	50	\$ 66.00
1"	4041EVFD	1.2	50	\$ 72.00
1 1/4"	4042E	1.5	36	\$ 88.00
1 1/4"	4042EVFD	1.5	36	\$ 96.00
1 1/2"	4043E	2.4	25	\$ 109.00
1 1/2"	4043EVFD	2.4	25	\$ 119.00
2"	4044E	3	16	\$ 175.00
2 1/2"	4045E	6.4		\$ 812.00
3"	4046E	13		\$ 1,185.00
4"	4047E	25		\$ 1,566.00

80AEVFD with a 1/4" Tapped Hole on the Inlet Side

SIZE	PART NO.	WGT.	CASE QTY.	LIST PRICE
------	----------	------	-----------	------------

1"	7981E	1.2	50	\$ 66.00
1"	7981EVFD	1.2	50	\$ 72.00
1 1/4"	7983E	1.5	36	\$ 88.00
1 1/4"	7983EVFD	1.5	36	\$ 96.00

80XAEVFD with a 1/4" Tapped Hole on the Outlet Side

SIZE	PART NO.	WGT.	CASE QTY.	LIST PRICE
------	----------	------	-----------	------------

1"	7982E	1.2	50	\$ 66.00
1"	7982EVFD	1.2	50	\$ 72.00
1 1/4"	7984E	1.5	36	\$ 88.00
1 1/4"	7984EVFD	1.5	36	\$ 96.00

**80BE/80BEVFD** Discount Code **A**



**80BEVFD - ENVIRO CHECK®** body casting unleaded bronze with threaded female connections. The valve features a high strength patented guide, poppet and spring with a NITRILE (Buna-N) seal. This valve has two drilled and tapped holes; 1/8" inlet and 1/4" outlet side.

Temp Max: 180 °F (80 °C) Pressure Max: 400 PSI

SIZE	PART NO.	WGT.	CASE QTY.	LIST PRICE
------	----------	------	-----------	------------

1"	4051E	1	50	\$ 70.00
1"	4051EVFD	1	50	\$ 79.86
1 1/4"	4052E	1.5	36	\$ 86.97
1 1/4"	4052EVFD	1.5	36	\$ 96.28
1 1/2"	4053E	2.3	25	\$ 113.30
1 1/2"	4053EVFD	2.3	25	\$ 123.60
2"	4054E	2.9	16	\$ 178.00
2 1/2"	4055E	6.3		\$ 855.00
3"	4056E	13		\$ 1,206.00
4"	4057E	25		\$ 1,578.00

80BEVFD with 1/4" Tapped Holes on Both Ends

SIZE	PART NO.	WGT.	CASE QTY.	LIST PRICE
------	----------	------	-----------	------------

1"	7971E	1	50	\$ 70.00
1"	7971EVFD	1	50	\$ 79.86
1 1/4"	7972E	1.5	36	\$ 86.97
1 1/4"	7972EVFD	1.5	36	\$ 96.28
1 1/2"	7973E	2.3	25	\$ 113.30
1 1/2"	7973EVFD	2.3	25	\$ 123.60
2"	7974E	2.9	16	\$ 178.00

**80XBVFD** Discount Code **A**




**80XBVFD - ENVIRO CHECK®** body casting unleaded bronze with threaded female connections. The valve features a high strength patented guide, poppet and spring with a NITRILE (Buna-N) seal. This valve has two 1/4" tapped holes on the outlet side for pressure switch and gauge.

Temp Max: 180 °F (80 °C) Pressure Max: 400 PSI

SIZE	PART NO.	WGT.	CASE QTY.	LIST PRICE
------	----------	------	-----------	------------

1"	7961EVFD	1.2	50	\$ 79.00
1 1/4"	7963EVFD	1.6	36	\$ 103.00
1 1/2"	7964EVFD	2.8	25	\$ 131.00
2"	7965E	3.2	16	\$ 215.00

**LEAD FREE  
NSF/ANSI 61**



Flomatic has a complete unleaded valve product line that complies with all low lead laws – Reduction of Lead in Drinking Water Act and NSF/ANSI 61 stringent requirements for equipment that comes in contact with potable water. Most of Flomatic's products in this price book are NSF/ANSI 61 and 372 certified. Please contact Flomatic for a complete listing of current approvals or visit [www.flomatic.com/approvals](http://www.flomatic.com/approvals)

For SS poppet, add "S" between "E" and "V" of the part number and add 10% to list price.

**VFD (Variable Flow Demand) Features & Benefits**

- Lower Friction Loss
- Noiseless Operation
- Patented Design
- 5 Year Warranty (Enviro Check®)
- Stainless Steel Internal Optional
- Optional SS or Ductile Iron Body



# Flomatic® Standard Thread Type and Valve Model Guide, Based on Thread & Pipe Type

THREAD TYPE (PIPE TYPE)	THREAD STANDARD	FLOMATIC VALVE MODELS
Taper Pipe Thread (Sch. 40 & 80)	NPT - ASME B1.20.1	80E, 80EVD, 80DI, 80DIVD, 80MDIVFD, 80DICLVFD, 80DIMCLVFD, 82DI, 82DIVFD, 80S6, 80S6VFD, 80MS6VFD, 80S6CLVFD, AND 80S6MCLVFD.
Line Pipe Thread 8 Round (Sch. 40 & 80)	LP - API 5B Table 3	80DI8R-VFD & 80S68R-VFD
External Upset Tubing Threads (API J55 Tubing)	EU - API 5B Table 7	80MDW-VFD & 80DW-VFD
Casing Short Thread (API J55 Tubing)	API 5B Table 1	80MDW-VFD & 80DW-VFD
Casing Long Thread (API J55 Tubing)	API 5B Table 4	80MDW-VFD & 80DW-VFD

Please consult factory with your thread requirements based on your pipe specifications for further information.  
API specification 5B 16<sup>th</sup> Edition - 2019



**80MDW-VFD DEEP WELL® 8 Round EU (External-Upset) Tubing** - High strength epoxy coated carbon steel body, male inlet x female outlet. Metal to metal seat with stainless steel spring / stem with external upset tubing round threads, EU-API 5B Table 7. Standard with break-off plug.

Consult factory for specifications

Temp Max: 180°F (80°C) Body Pressure Max: 4,400 PSI (API J55 Tubing)

SIZE	PART NO.	WGT.	LIST PRICE
2 3/8"	7937MDW8EUPLG	8	\$ 1,376.00
2 7/8"	7936MDW8EUPLG	13	\$ 1,623.00
3 1/2"	7938MDW8EUPLG	20	\$ 1,873.00
4 1/2"	7939MDW8EUPLG	37	\$ 2,748.00

NOTE: Consult factory for other thread combinations

Exclusive Deep Well Check Valves by Flomatic Valves.



**BREAK-OFF PLUG** - Stainless steel construction. Threaded to install into valve. When broken off, riser pipe drains. For use ONLY with Model 80MDW-VFD above.

Temp Max: 180°F (80°C) Pressure Max: 600 PSI

VALVE SIZE	PART NO.	PLUG SIZE	LIST PRICE
2 3/8" & 2 3/8"	76098-2DW	3/8"	\$ 69.00
3 1/2"	76098-3	3/8"	\$ 69.00
4 1/2" & 5"	76098-5DW	3/4"	\$ 163.00
5 1/2" & 7 5/8"	76098-7DW	3/4"	\$ 163.00
8 5/8" & 9 5/8"	76098-9DW	3/4"	\$ 163.00



**80MDW-VFD DEEP WELL® 8 Round Male end short casing x female end long casing threads** - High strength epoxy coated carbon steel body, male inlet x female outlet. Metal to metal seat with stainless steel spring and stem with casing round threads. Standard with break-off plug.

Consult factory for specifications

Temp Max: 180°F (80°C) Body Pressure Max: 4,400 PSI (API J55 Tubing)

SIZE	PART NO.	WGT.	LIST PRICE
4 1/2"	79391MDW8SLPLG	40	\$ 2,748.00
5"	79402MDW8SLPLG	34	\$ 2,748.00
5 1/2"	4088MDW8SLPLG	45	\$ 5,246.00
6 5/8"	4089MDW8SLPLG	68	\$ 6,496.00
7"	40903MDW8SLPLG	113	\$ 8,744.00
7 5/8"	4091MDW8SLPLG	90	\$ 10,617.00
8 5/8"	4092MDW8SLPLG	99	\$ 12,491.00
9 5/8"	4093MDW8SLPLG	154	\$ 14,989.00

NOTE: Consult factory for other thread combinations



**80DI8R-VFD 8 Round Line Pipe Threads** - High strength epoxy coated ductile iron patented body, poppet and guide with 8 round connection. Features a NITRILE (Buna-N) seal, with stainless steel shaft and a ductile iron poppet. Designed for vertical or horizontal applications.

Consult factory for specifications


Temp Max: 180°F (80°C) Pressure Max: 600 PSI

Line Pipe Thread 8 Round (Sch. 40 & 80) LP-API 5B Table 3

SIZE	PART NO.	WGT.	LIST PRICE
3"	7938-1VFD	16	\$ 1,140.00
4"	7939-1VFD	47	\$ 1,237.00
5"	4088-1VFD	49	\$ 2,030.00
6"	4089-1VFD	70	\$ 2,792.00
8"	4090-1VFD	99	\$ 4,790.00

To order break-off plug, add "PLG" to part number and add \$100.00 to list price, \$75.00 added for composite plug installed and add "PPLG" to end of part number

## BREAK-OFF PLUG OPERATION

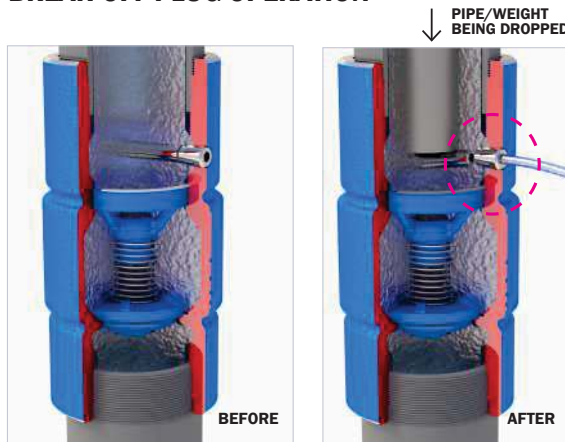

### Benefits

- WHEN SERVICING THE PUMP, IT REDUCES THE LIFTING WEIGHT, BY ALLOWING THE WATER TO DRAIN
- ELIMINATES WATER SPLASHING AT SURFACE
- SIMPLY REPLACE THE BREAK-OFF PLUG FOR RE-INSTALLATION

### Features

- NO CORROSIVE PARTS
- AVAILABLE FOR SERIES 80DI, 80DI-VFD, 80DIX, 80S6, AND 80S6VFD.
- STANDARD ON SERIES 80MDW-VFD

DUCTILE IRON CHECK VALVES 800.833.2040



**80DI-VFD** - High strength epoxy coated ductile iron patented body, poppet and guide with threaded female NPT connections. Features a NITRILE (Buna-N) seal. Designed for vertical or horizontal applications.

Temp Max: 180 °F (80 °C) Pressure Max: 600 PSI

**SIZE PART NO. WGT. CASE QTY. LIST PRICE**

Stainless Poppet & Composite Guide

1"	4031DIVFD	0.8	50	\$ 42.00
1 1/4"	4032DIVFD	1.3	36	\$ 59.00
1 1/2"	4033DIVFD	2.5	25	\$ 83.00
2"*	7937VFD*	4	16	\$ 147.00
2 1/2"*	7936VFD*	9	1	\$ 355.00

\* Not for horizontal installation. See 7937SVFD & 7936SVFD below

Stainless Poppet & Stainless Guide

2"	7937SVFD	4	16	\$ 162.00
2 1/2"	7936SVFD	9	1	\$ 392.00

Stainless Stem & Ductile Iron Poppet and Guide

3"	7938VFD	12	1	\$ 540.00
4"	7939VFD	27	1	\$ 798.00
5"	4088VFD	40	1	\$ 1,498.00
6"	4089VFD	63	1	\$ 1,809.00
8"	4090VFD	87	1	\$ 3,195.00
10"	4091VFD	150	1	\$ 5,500.00

To order break-off plug, add "PLG" to part number and add \$100.00 to list price, \$ 75.00 added for composite plug installed and add "PPLG" to end of part number



**80DI** - High strength epoxy coated ductile iron body, disc and follower with threaded female connections. Features a NITRILE (Buna-N) seal, stainless steel spring fasteners, and ductile iron poppet. 2 1/2" and larger are recommended for vertical applications. See 80DIX or VFD design for horizontal.

Note: 1" through 1 1/2" features acetal poppet.

Temp Max: 180 °F (80 °C)

Pressure Max: 400 PSI 1" - 1 1/2", 600 PSI 2" - 8"

**SIZE PART NO. WGT. CASE QTY. LIST PRICE**

1"	4031DI	1	50	\$ 35.71
1 1/4"	4032DI	1.6	36	\$ 49.65
1 1/2"	4033DI	2.4	25	\$ 67.85
2"*	7937*	4	16	\$ 127.00
2 1/2"	7936	9	1	\$ 301.00
3"	7938	12	1	\$ 428.00
4"	7939	26	1	\$ 659.00
5"	4088	46	1	\$ 1,221.00
6"	4089	61	1	\$ 1,529.00
8"	4090	93	1	\$ 2,673.00

\* Longer body with stainless steel seat, use break off plug 76098-2.

To order break-off plug, add "PLG" to part number for 2"-8" and add \$100.00 to list price, \$75.00 added for composite plug installed and add "PPLG" to end of part number.



**48 - DRAIN-BACK** - 1" Drain-Back valve in an all stainless steel construction. Threads to install into a 1" pipe tee. The reusable spring loaded valve is activated when a weight is dropped, draining the riser pipe automatically. Patent Pending.

Temp Max: 180 °F (80 °C) Pressure Max: 400 PSI

**VALVE SIZE PART NO. WEIGHT LIST PRICE**

1"	4801SS	1	\$ 75.00
----	--------	---	----------



**80DIX** - High strength epoxy coated ductile iron body features a double-guided ductile iron poppet. Designed for vertical and horizontal applications.

Temp Max: 180 °F (80 °C) Pressure Max: 400 PSI

**SIZE PART NO. WGT. LIST PRICE**

3"	7938DIX	13	\$ 409.00
4"	7939DIX	17	\$ 641.00
6"	4089DIX	51	\$ 1,165.00
8"	4090DIX	89	\$ 2,939.00
10"	4091DIX	150	\$ 4,576.00
12"	4092DIX	350	\$ 9,428.00

To order with break-off plug, replace "DIX" with "XPL" in part number and add \$100.00 to list price of valve, \$75.00 added for composite plug installed and add "XPPLG" to end of part number.

See 80DI or 80DIVFD for high capacity flow.



**BREAK-OFF PLUG** - Stainless steel construction. Threaded to install into valve. When broken off, riser pipe drains.

Temp Max: 180 °F (80 °C) Pressure Max: 600 PSI

**VALVE SIZE PART NO. PLUG SIZE LIST PRICE**

2"	76098-2	1/8"	\$ 66.00
2 1/2"	76098-3	3/8"	\$ 69.00
3"	76098-6	3/8"	\$ 69.00
4"	76098-7	3/8"	\$ 69.00
5", 6"*	76098*	3/8"	\$ 73.00
8"	76098-8	1/2"	\$ 85.00
10" & 12"	76098-11	1/2"	\$ 110.00

\*8" size valve was 3/8" plug size prior to 2013.



**COMPOSITE BREAK-OFF PLUG** - Threaded 3/8" to install into valve. When broken off, riser pipe drains.

Temp Max: 180 °F (80 °C) Pressure Max: 600 PSI

**VALVE SIZE PART NO. PLUG SIZE LIST PRICE**

2 1/2" - 6"	76098P	3/8"	\$ 24.00
-------------	--------	------	----------

NOTE: One size fits all, designed for 6" size valves and marked where to cut for smaller valve sizes (2 1/2" & 3", 4").

## FLOMATIC® SUBMERSIBLE PUMP CHECK VALVE SERIES 80DI-VFD PATENTED DESIGN

With Stainless Steel Guiding (2" - 10")

### Features & Benefits

- VFD Pump Compatible
- 20% - 30% lower Friction Loss
- Noiseless Operation
- Strong Ductile Iron Valve Body (Enviro see page 2) (Stainless see pages 6, 7, 8)
- Corrosion Resistant Internal Components
- Fusion Epoxy Coating - Flo-Coat®
- Longer pipe threads with lead-in section
- Optional 8 round
- Optional "Break-Off" Plug





**82DI-VFD** Discount Code **A**



**82DI-VFD** - High strength epoxy coated ductile iron body, poppet and stainless steel guide with threaded male x male connection. Features a NITRILE (Buna-N) seal, stainless steel shaft, and ductile iron poppet. Designed for vertical or horizontal applications.

Temp Max: 180 °F (80 °C) Pressure Max: 600 PSI

SIZE	PART NO.	WGT.	LIST PRICE
2"M x 2"M*	4093VFD*	3	\$ 204.00
2"M x 2"M	4093SVFD	3	\$ 236.00
3"M x 3"M*	4094VFD*	6	\$ 411.00
3"M x 3"M	4094SVFD	6	\$ 452.00
4"M x 4"M	4095VFD	12	\$ 663.00
5"M x 5"M	4096VFD	27	\$ 1,016.00
6"M x 6"M	4097VFD	40	\$ 2,051.00
8"M x 8"M	4098VFD	63	\$ 2,735.00

To order with break-off plug, add "PLG" to part number and add \$ 100.00 to list price of valve, \$75.00 added for composite plug installed and add "PPLG" to end of part number.

\* Not for horizontal installation, see 4093SVFD & 4094SVFD.

**80SL Slim Line®** Discount Code **A**



**80SL Slim Line®** - Carbon Steel epoxy coated threaded valve body with all 316 stainless steel internals. Nitrile nylon seal features a small OD body dimension.

Temp Max: 200 °F (93 °C) Pressure Max: 450 PSI

SIZE	PART NO.	WGT.	LIST PRICE
2"	7937SL	5	\$ 635.00
3"	7938SL	8	\$ 777.00
4"	7939SL	18	\$ 1,194.00
5"	4088SL	21	\$ 1,875.00
6"	4089SL	36	\$ 2,759.00
8"	4090SL	64	\$ 4,539.00

To order with break-off plug, add "PLG" to part number and add \$100.00 to list price of valve

**SLIM LINE® - PRODUCT HIGHLIGHTS**

- All 316 Stainless Steel Internals
- Lower Friction Loss than Conventional Poppet Style Check Valves
- Compact Design to fit in smaller diameter well casings
- Full Port for Higher Flow and Low Friction Loss
- Optional Break-Off Plug Available

**80MDI-VFD** Discount Code **A**



**80MDI-VFD** - High strength epoxy coated ductile iron body, high strength poppet and guide with threaded male x female NPT connection. Features a NITRILE (Buna-N) seal, stainless steel shaft, and ductile iron poppet. Designed for vertical or horizontal applications.

Temp Max: 180 °F (80 °C) Pressure Max: 600 PSI

SIZE	PART NO.	WGT.	LIST PRICE
1 ¼"M x 1"F	4221DIVFD	1	\$ 34.00
1 ¼"M x 1 ¼"F	4242DIVFD	1.2	\$ 48.83
2"M x 2"F*	4084VFD*	4	\$ 220.00
2"M x 2"F	4084SVFD	4	\$ 265.00
3"M x 3"F	4083VFD	14	\$ 451.00
4"M x 4"F	4077VFD	22	\$ 641.00
5"M x 5"F	4075VFD	23	\$ 1,125.00
6"M x 5"F	4087VFD	48	\$ 1,134.00
6"M x 6"F	4081VFD	50	\$ 1,283.00

To order with break-off plug, add "PLG" to part number for 2"-6" and add \$100.00 to list price of valve, \$ 75.00 added for composite plug installed and add "PPLG" to end of part number.

\*Not for horizontal installation, see 4084SVFD.

**82DP** (Replaces 82) Discount Code **A**



**82DP** - Dual purpose compact ductile iron reduced ported check valve with female and male threads on both ends. High strength ductile iron body and poppet, with stainless steel spring and fasteners. Designed to fit into tight fitting wells.

Temp Max: 180 °F (80 °C) Pressure Max: 400 PSI

SIZE	PART NO.	WGT.	LIST PRICE
2 ½"F x 3"M*	4094DP*	7	\$ 348.00
3"F x 4"M	4095DP	10	\$ 440.00
4"F x 5"M	4096DP	25	\$ 809.00
5"F x 6"M	4097DP	51	\$ 1,236.00

Same valve as 82, extra female (internal) threads.

Note: RESTRICTED FLOW - REDUCED PORTED, SEE VFD MODEL FOR FULL PORTED, HIGH FLOW DESIGN.

\* Unleaded Bronze Poppet

**100MDI** Discount Code **A**



**100MDI** - High strength epoxy coated ductile iron valve features male threaded inlet and female threaded outlet. Ideal for submersible pumps.

Temp Max: 180 °F (80 °C) Pressure Max: 400 PSI

SIZE	PART NO.	WGT.	LIST PRICE
1 ¼"M x 1"F	4221LDI	1	\$ 29.00
2"M x 2"F*	4084VFD*	4.5	\$ 227.00

\*VFD design

**80DICLVFD** Discount Code **A**



**80DICLVFD** - Ductile iron check valve incorporates grooved locking Certa-Lok® pipe connections. Fusion epoxy coated inside and out including poppet assembly, this valve is corrosion resistant and unleaded. High strength ductile iron body with stainless steel spring and NITRILE (Buna-N) seal.

Also available in all 316SS, Model 80S6CLVFD. See Page 8

Temp Max: 180 °F (80 °C) Pressure Max: 400 PSI

SIZE	PART NO.	WGT.	LIST PRICE
2"*	7937CLVFD*	2.5	\$ 322.00
2"	7937CLSVFD	2.5	\$ 354.00
3"*	7938CLVFD*	10	\$ 423.00
3"	7938CLSVFD	10	\$ 477.00
4"	7939CLVFD	27	\$ 630.00
5"	4088CLVFD	32	\$ 1,097.00
6"	4089CLVFD	47	\$ 1,607.00
8"	4090CLVFD	90	\$ 2,571.00

**80MDICLVFD** - Ductile iron check valve uses groove lock type pipe connection on outlet end, and male pipe thread for the inlet connection. Materials are the same as the 80DICLVFD.

SIZE	PART NO.	WGT.	LIST PRICE
2"*	7937MCLVFD*	2.5	\$ 322.00
2"	7937MCLSVFD	2.5	\$ 354.00
3"*	7938MCLVFD*	10	\$ 423.00
3"	7938MCLSVFD	10	\$ 477.00
4"	7939MCLVFD	27	\$ 630.00
5"	4088MCLVFD	32	\$ 1,097.00
6"	4089MCLVFD	47	\$ 1,607.00
8"	4090MCLVFD	90	\$ 2,571.00

To order with break-off plug, add "PLG" to part number and add \$100.00 to list price of valve, \$ 75.00 added for composite plug installed and add "PPLG" to end of part number.

\*Not for horizontal installation. See 7937CLSVFD or 7937MCLSVFD, 7938CLSVFD, 7938MCLSVFD.

Certa-Lok® is a registered trademark with NAPCO.

**100% Fusion Bonded Epoxy coated with NSF/ANSI 61 approved powder with quality coating operation, Flo-Coat®.**



**80SS/100SS** Discount Code **A**



**80SS/100SS** - All stainless steel one piece body. Stainless steel spring with a NITRILE (Buna-N) seal. Threaded female x female connections.

Temp Max: 180 °F (80 °C) Pressure Max: 400 PSI

SIZE	PART NO.	STYLE	WGT.	CASE QTY.	LIST PRICE
1"	4031SS2	80	1	50	\$54.62
1"	4201SS2	100	1	50	\$54.62
1"	4201LSS2	100	1	50	\$63.19
1 1/4"	4202SS2	100	2	36	\$77.00
1 1/4"	4032SS2	80	2	36	\$80.00
1 1/2"	4033SS2	80	2	25	\$106.00
2"	4034SS2	80	3	16	\$171.00

For SS poppet, add "S" between "2" and "V" of the part number and add 10% to list price.

**80SSAVFD** Discount Code **A**



**80SSAVFD** - All stainless steel female x female threaded check valve body features a high strength patented guide with stainless steel spring, delrin poppet and a NITRILE (Buna-N) seal. This valve has a 1/8" drilled and tapped hole on the inlet side.

Temp Max: 180 °F (80 °C) Pressure Max: 400 PSI

80SSAVFD with a 1/8" Tapped Hole on the Inlet Side

SIZE	PART NO.	WGT.	CASE QTY.	LIST PRICE
1"	4041SS2VFD	1.2	50	\$ 82.00
1 1/4"	4042SS2VFD	1.5	36	\$ 111.00
1 1/2"	4043SS2VFD	2.4	25	\$ 146.00
2"*	4044SS2*	3	16	\$ 218.00

80SSAVFD with a 1/4" Tapped Hole on the Inlet Side

SIZE	PART NO.	WGT.	CASE QTY.	LIST PRICE
1"	7981SS2VFD	1.2	50	\$ 82.00
1 1/4"	7983SS2VFD	1.5	36	\$ 111.00
1 1/2"	7985SS2VFD	2.4	25	\$ 146.00
2"*	7987SS2*	3	16	\$ 218.00

80SSAVFD with a 1/8" Tapped Hole on the Outlet Side

SIZE	PART NO.	WGT.	CASE QTY.	LIST PRICE
1"	8981SS2VFD	1.2	50	\$ 82.00
1 1/4"	8982SS2VFD	1.5	36	\$ 111.00
1 1/2"	8983SS2VFD	2.4	25	\$ 146.00
2"*	8984SS2*	3	16	\$ 218.00

80SSXAVFD with a 1/4" Tapped Hole on the Outlet Side

SIZE	PART NO.	WGT.	CASE QTY.	LIST PRICE
1"	7982SS2VFD	1.2	50	\$ 82.00
1 1/4"	7984SS2VFD	1.6	36	\$ 111.00
1 1/2"	7986SS2VFD	2.4	25	\$ 146.00
2"*	7988SS2*	3	16	\$ 218.00

\*Non VFD design

**100SSVFD** Discount Code **A**



**100SSVFD** - All stainless steel female x female threaded valve body features patented VFD design with stainless steel spring, delrin poppet with a NITRILE (Buna-N) seal.

Temp Max: 180 °F (80 °C) Pressure Max: 400 PSI

SIZE	PART NO.	WGT.	CASE QTY.	LIST PRICE
1"	4201SS2VFD	1	50	\$65.33
1 1/4"	4202SS2VFD	2	36	\$82.00
1 1/2"	4203SS2VFD	2	36	\$127.00

For SS poppet, add "S" between "2" and "V" of the part number and add 10% to list price.

**80SSBVFD** Discount Code **A**



**80SSBVFD** - All stainless steel female x female threaded check valve body features a high strength patented guide with stainless steel spring, delrin poppet and a NITRILE (Buna-N) seal. This valve has two drilled and tapped holes; 1/8" inlet side and 1/4" outlet side.

Temp Max: 180 °F (80 °C) Pressure Max: 400 PSI

SIZE	PART NO.	WGT.	CASE QTY.	LIST PRICE
1"	4051SS2VFD	1	50	\$ 91.00
1 1/4"	4052SS2VFD	1.5	36	\$ 117.00
1 1/2"	4053SS2VFD	2.3	25	\$ 153.00
2"*	4054SS2*	2.9	16	\$ 224.00

80SSBVFD with 1/4" Tapped Holes on Both Ends

SIZE	PART NO.	WGT.	CASE QTY.	LIST PRICE
1"	7971SS2VFD	1	50	\$ 91.00
1 1/4"	7972SS2VFD	1.5	36	\$ 117.00
1 1/2"	7973SS2VFD	2.3	25	\$ 153.00
2"*	7974SS2*	2.9	16	\$ 224.00

80SSBVFD with 1/8" Tapped Holes on Both Ends

SIZE	PART NO.	WGT.	CASE QTY.	LIST PRICE
1"	7951SS2VFD	1	50	\$ 91.00
1 1/4"	7952SS2VFD	1.5	36	\$ 117.00
1 1/2"	7953SS2VFD	2.3	25	\$ 153.00
2"*	7954SS2*	2.9	16	\$ 224.00

\*Non VFD design

**80SSXBVFD** Discount Code **A**



**80SSXBVFD** - All stainless steel female x female threaded check valve body features a high strength patented guide with stainless steel spring, delrin poppet and a NITRILE (Buna-N) seal. This valve has two 1/4" tapped holes on the outlet side for pressure switch and gauge.

Temp Max: 180 °F (80 °C) Pressure Max: 400 PSI

SIZE	PART NO.	WGT.	CASE QTY.	LIST PRICE
1"	7961SS2VFD	1.2	50	\$ 97.00
1 1/4"	7963SS2VFD	1.6	36	\$ 125.00
1 1/2"	7964SS2VFD	2.3	25	\$ 163.00

**80SSCVFD** Discount Code **A**



**80SSCVFD** - All stainless steel female x female threaded check valve body features patented VFD design with stainless steel spring, delrin poppet and a NITRILE (Buna-N) seal. Control Center with four tapping; one 1/8" inlet side, two 1/4" outlet sides, one 1/8" outlet side with a SS plug.

Temp Max: 180 °F (80 °C) Pressure Max: 400 PSI

SIZE	PART NO.	WGT.	CASE QTY.	LIST PRICE
1"	4061SS2VFD	1.2	50	\$ 97.00
1 1/4"	4062SS2VFD	1.6	36	\$ 125.00

For SS poppet, add "S" between "2" and "V" of the part number and add 10% to list price.

**80S6** Discount Code **A**



**80S6** - All 316 stainless steel female threaded check valve body. Stainless steel spring, poppet and a Viton seal, (Buna-N) optional.

Temp Max: 400 °F (200 °C) Pressure Max: 450 PSI

SIZE	PART NO.	WGT.	LIST PRICE
1"	4031S6	1.1	\$ 95.00
1 1/4"	4032S6	1.4	\$ 152.00
1 1/2"	4033S6	2.7	\$ 185.00
2"	4034S6	4.0	\$ 270.00
3"	7938S6	10	\$ 939.00
4"	7939S6	25	\$ 1,452.00
6"	4089S6	65	\$ 4,725.00
8"	4090XSS	90	\$ 7,390.00
10"	4091XSS	170	\$ 13,175.00

Smaller sizes 3/8", 1/4", 1/2" see page 25

To order Model 80S6 with break-off plug, add "PLG" to part number for 2" - 10" and add \$100.00 to list price on valve above, \$75.00 added for composite plug installed and add "PPLG" to end of part #.

**80MS6VFD** Discount Code **A**



**80MS6VFD** - All 316 stainless steel threaded male x female check valve body features patented VFD design with stainless steel spring, poppet and a NITRILE (Buna-N) seal.

Temp Max: 180 °F (80 °C) Pressure Max: 450 PSI

SIZE	PART NO.	WGT.	LIST PRICE
2"M x 2"F	4084S6VFD	5	\$ 442.00
3"M x 3"F	4083S6VFD	13	\$ 1,143.00
4"M x 4"F	4077S6VFD	30	\$ 2,008.00
6"M x 6"F	4081S6VFD	69	\$ 5,300.00

To order Model 80MS6VFD with break-off plug, add "PLG" to part number for 2" - 6" and add \$100.00 to list price on valve above, \$75.00 added for composite plug installed and add "PPLG" to end of part #.



**MODEL 80DIVFD (PATENTED)**

**80S6VFD** Discount Code **A**



**80S6VFD** - All 316 stainless steel female threaded check valve body. Features a patented VFD design with stainless steel spring, poppet and a NITRILE (Buna-N) seal, Viton optional.

Temp Max: 180 °F (80 °C)

Pressure Max: 450 PSI 1" - 1 1/2", 600 PSI 2" - 8"

SIZE	PART NO.	WGT.	LIST PRICE
1"*	4031S6VFD*	1	\$ 111.00
1 1/4"*	4032S6VFD*	1.3	\$ 166.00
1 1/2"*	4033S6VFD*	2.5	\$ 221.00
2"	4034S6VFD	5	\$ 331.00
2 1/2"	7936S6VFD	10	\$ 695.00
3"	7938S6VFD	13	\$ 1,274.00
4"	7939S6VFD	30	\$ 1,853.00
5"	4088S6VFD	42	\$ 3,308.00
6"	4089S6VFD	69	\$ 5,403.00
8"	4090XSSVFD	95	\$ 8,705.00

To order Model 80S6VFD with break-off plug, add "PLG" to part number for 2" - 8" and add \$100.00 to list price on valve above, \$75.00 added for composite plug installed and add "PPLG" to end of part #.

\* Composite guide

**OPTIONAL "DRAIN BACK" FEATURE  
WITH ORIFICE MACHINED IN POPPET  
CONSULT FACTORY**

**100MSS** Discount Code **A**



**100MSS** - All stainless steel body, threaded male x female connection. Features a high strength delrin poppet, stainless steel spring with a NITRILE (Buna-N) seal.

Temp Max: 180 °F (80 °C) Pressure Max: 400 PSI

SIZE	PART NO.	WGT.	LIST PRICE
3/4"M x 3/4"F*	4218SS*	100	\$ 99.00
1"M x 1"F	4220SS2VFD	50	\$ 68.25
1 1/4"M x 1"F**	4221LSS2**	50	\$ 55.65
1 1/4"M x 1 1/4"F	4242SS2	50	\$ 69.30
1 1/4"M x 1 1/4"F**	4242LSS2**	50	\$ 70.35

\* Made from bar stock, with a viton seal

\*\* Longer Body

**82S6VFD** Discount Code **A**



**82S6VFD** - All 316 stainless steel threaded male x female threaded check valve body features patented VFD design with stainless steel spring, poppet and a NITRILE (Buna-N) seal.

Temp Max: 180 °F (80 °C) Pressure Max: 450 PSI

SIZE	PART NO.	WGT.	LIST PRICE
2"M x 2"M	4093S6VFD	4	\$ 1,021.00
3"M x 3"M	4094S6VFD	6	\$ 1,194.00
4"M x 4"M	4095S6VFD	12	\$ 1,489.00
5"M x 5"M	4096S6VFD	27	\$ 2,263.00
6"M x 6"M	4097S6VFD	40	\$ 4,631.00
8"M x 8"M	4098S6VFD	63	\$ 6,174.00

To order Model 82S6VFD with break-off plug, add "PLG" to part number for 3" - 8" and add \$100.00 to list price on valve above, \$75.00 added for composite plug installed and add "PPLG" to end of part #.

**100XLSS** Discount Code **A**



**100XLSS** - All stainless steel. Hex shaped for easy wrenching, this valve features a non-spin acetal poppet, with a NITRILE (Buna-N) seal and stainless steel spring. Features extra long threads for special bell end PVC pipe, with threaded male x female connection.

Temp Max: 180 °F (80 °C) Pressure Max: 400 PSI

SIZE	PART NO.	WGT.	CASE QTY.	LIST PRICE
1"M x 1"F	4201XLSS2	1	36	\$ 72.00
1 1/4"M x 1 1/4"F	4242XLSS2	1.5	36	\$ 90.00

**100MSSVFD** Discount Code **A**



**100MSSVFD** - All stainless steel male x female threaded check valve body features patented VFD design with stainless steel spring, delrin poppet and a NITRILE (Buna-N) seal.

Temp Max: 180 °F (80 °C) Pressure Max: 400 PSI

Composite Poppet & Guide

SIZE	PART NO.	WGT.	LIST PRICE
1"M x 1"F	4220SS2VFD	50	\$ 68.25
1 1/4"M x 1"F	4221SS2VFD	50	\$ 71.38
1 1/4"M x 1 1/4"F	4242SS2VFD	50	\$ 81.90
1 1/2"M x 1 1/4"F	4223SS2VFD	36	\$ 109.00

STAINLESS STEEL CHECK VALVES 800.833.2040



**80S6CLVFD** Discount Code **A**



**80S6CLVFD** - All 316 stainless steel check valve incorporates grooved locking Certa-Lok® pipe connections. Stainless steel inside and out including poppet assembly. High strength stainless steel body and spring with a NITRILE (Buna-N) seal.

Also available in ductile iron. See Page 5.

Temp Max: 180 °F (80 °C) Pressure Max: 450 PSI

SIZE	PART NO.	WGT.	LIST PRICE
2"	7937S6CLVFD	4	\$ 1,048.00
3"	7938S6CLVFD	10	\$ 1,135.00
4"	7939S6CLVFD	27	\$ 1,488.00
5"	4088S6CLVFD	32	\$ 2,263.00
6"	4089S6CLVFD	47	\$ 4,631.00
8"	4090S6CLVFD	90	\$ 6,174.00

Certa-Lok® is a registered trademark with NAPCO.

To order Model 80S6CLVFD with break-off plug, add "PLG" to part number for 3"- 8" and add \$100.00 to list price on valve above, \$75.00 added for composite plug installed and add "PPLG" to end of part #.

**80S6MCLVFD** Discount Code **A**



**80S6MCLVFD** - All 316 stainless steel check valve incorporates grooved locking Certa-Lok® pipe connections, on outlet end and male pipe thread for the inlet connection. Materials are the same as the 80S6CLVFD.

Also available in ductile iron. See Page 5.

Temp Max: 180 °F (80 °C) Pressure Max: 450 PSI


SIZE	PART NO.	WGT.	LIST PRICE
2"	7937S6MCLVFD	4	\$ 1,048.00
3"	7938S6MCLVFD	10	\$ 1,135.00
4"	7939S6MCLVFD	27	\$ 1,488.00
5"	4088S6MCLVFD	32	\$ 2,263.00
6"	4089S6MCLVFD	47	\$ 4,631.00
8"	4090S6MCLVFD	90	\$ 6,174.00

Certa-Lok® is a registered trademark with NAPCO.

Reverse combination available on the inlet side & male on outlet. To order Model 80S6MCLVFD with break-off plug, add "PLG" to part number for 3"- 8" and add \$100.00 to list price on valve above, \$75.00 added for composite plug installed and add "PPLG" to end of part #.

**VISIT OUR WEBSITE AT  
WWW.FLOMATIC.COM  
OR CALL 800.833.2040**

**HOW TO ORDER WARD VALVE**

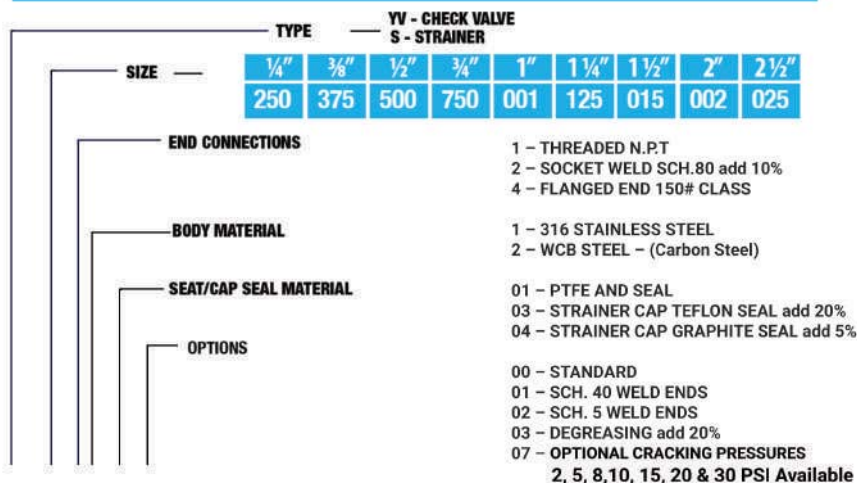

YV - 500-1-1-01

Example above show a 1/2" check valve, NPT threaded, 316SS body with PTFE seat and seal.

**816** Discount Code **B**



**816** - All 316 stainless steel threaded FNPT "Y-Type" check valve. Patented Spring loaded, Teflon® soft-seated plunger with all 316SS internals.

Temp Max: 450 °F (230 °C) Pressure Max: 600 PSI  
Pressure & temp dependent consult factory

X=1 FOR STAINLESS X=2 FOR CARBON

SIZE	PART NO.	WGT.	STAINLESS LIST PRICE	CARBON LIST PRICE
1/4"	YV2501-X-0100	1	\$281.00	\$ 249.00
3/8"	YV3751-X-0100	1	\$281.00	\$ 249.00
1/2"	YV5001-X-0100	1	\$281.00	\$ 249.00
3/4"	YV7501-X-0100	1	\$351.00	\$ 315.00
1"	YV0011-X-0100	2	\$395.00	\$ 393.00
1 1/4"	YV1251-X-0100	4	\$554.00	\$ 529.00
1 1/2"	YV0151-X-0100	4	\$630.00	\$ 550.00
2"	YV0021-X-0100	7	\$932.00	\$ 843.00

Consult factory for pricing & other end connections and body material options.

**WARD VALVES**

- ▶ PTFE Seated
- ▶ Low Friction Losses
- ▶ Optional "Cracking" Opening Pressures
- ▶ In-Line Servicable



**816FL** Discount Code **B**



**816FL** - All 316 stainless steel flanged "Y-Type" check valve. Patented Spring loaded, Teflon® soft-seated plunger, optional encapsulated spring, with all 316SS internals.

Temp Max: 450 °F (230 °C) Pressure Max: 600 PSI  
Pressure & temp dependent consult factory

X=1 FOR STAINLESS X=2 FOR CARBON

SIZE	PART NO.	WGT.	STAINLESS LIST PRICE	CARBON LIST PRICE
1"	YV0014-X-0100	5.5	\$ 802.00	\$ 747.00
1 1/4"	YV1254-X-0100	8	\$ 1,005.00	\$ 884.00
1 1/2"	YV0154-X-0100	10	\$ 1,190.00	\$ 1,018.00
2"	YV0024-X-0100	15	\$ 1,525.00	N/A

Consult factory for pricing & other sizes and body materials.

**816HS** Discount Code **B**



**816HS** - Same body as Model 816 with heavy spring for higher cracking pressure.

Temp Max: 450 °F (230 °C)\* Pressure Max: 600 PSI  
Pressure & temp dependent consult factory

SIZE	PART NO.	CRACKING PRESSURE	LIST PRICE
1"	YV001110107-02	2 PSI	\$ 438.00
1"	YV001110107-05	5 PSI	\$ 438.00
1"	YV001110107-08	8 PSI	\$ 438.00
1"	YV001110107-10	10 PSI	\$ 438.00
1"	YV001110107-15	15 PSI	\$ 438.00
1"	YV001110107-20	20 PSI	\$ 438.00
1"	YV001110107-30	30 PSI	\$ 438.00

Additional sizes with optional cracking pressures available consult factory.

\*Note: the last 2 digits are the weight of the spring.

**812X Discount Code B**



**812X WAFER STYLE CHECK VALVE** - All 316 stainless steel, wafer connection for class 150 and 300 flanges. Metal to metal seating standard, 1 1/2" - 8" available with NITRILE (Buna-N) or VITON seal optional.

Temp Max: -20° F (-30°C) to 660° F (350°C)

Pressure Max: Metal Seating 600 PSI

Consult factory for temp. & pressure rating.

SIZE	PART NO.	WGT.	LIST PRICE
1/2"	2420X	.2	\$ 115
3/4"	2421X	.3	\$ 140
1"	2422X	.5	\$ 160
1 1/4"	2423X	.7	\$ 192
1 1/2"	2424X	1.4	\$ 283
2"	2425X	1.6	\$ 329
2 1/2"	2426X	3.4	\$ 391
3"	2427X	4.8	\$ 546
4"	2428X	7.4	\$ 727
5"	2429X	20	\$ 2,663
6"	2430X	32	\$ 3,055
8"*	2431X*	67	\$ 5,833
8"	2432X	69	\$ 6,815

Note: Add V (Viton) or R (Buna-N) to part #. Consult Factory for pricing.

\*230 PSI Max

**812XT Discount Code B**



**812XT** - All 316 stainless steel, threaded 3 piece check valve and body. Metal to metal seating, Teflon O-ring, 1 1/2" - 8" available with NITRILE (Buna-N) or VITON seal optional. 2" - 6" available with socket weld connection, add 25% to list, to order replace "T" from the end of part number with "S".

Temp Max: Metal Seating only 400° F (200°C)\*

Pressure Max: 300 PSI\*

SIZE	PART NO.	WGT.	LIST PRICE
1/2"	2420XT	.9	\$ 145
3/4"	2421XT	1.5	\$ 168
1"	2422XT	2.1	\$ 207
1 1/4"	2423XT	3.5	\$ 314
1 1/2"	2424XT	5.3	\$ 405
2"	2425XT	7.5	\$ 560
2 1/2"	2426XT	19	\$ 690
3"	2427XT	24	\$ 1,003
4"	2428XT	38	\$ 1,664
5"	2429XT	60	\$ 2,987
6"	2430XT	77	\$ 4,246
8**	2431XT**	136	\$ 7,086

Note: Add V (Viton) or R (Buna-N) to part #. Consult Factory for pricing.

\*Consult factory for temp. & pressure rating.

\*\*230 PSI Max

Also available with Socket Weld (XS) ends.

Note: For center part replacement consult factory.

**888S6R/888S6 Discount Code B**



Patented

**888S6R/888S6** - All 316 stainless steel silent wafer style check valve, dual rated for class 150 and 300 flanges.

ASME 150#: Max Pressure 275 PSI at 100° F

ASME 300#: Max Pressure 475 PSI at 100° F

Consult factory for pressure rating standards.

**888S6R EPDM standard - seal drip tight**

SIZE	PART NO.	WGT.	LIST PRICE
2"	2434S6R	5	\$ 499
2 1/2"	2432S6R	7	\$ 578
3"	2435S6R	11	\$ 699
4"	2436S6R	18	\$ 958
6"	2437S6R	36	\$ 1,724
8**	2438S6R*	80	\$ 3,048
8**	2438S6R2**	85	\$ 3,534

**888S6 optional - Metal to Metal seat not drip tight**

SIZE	PART NO.	WGT.	LIST PRICE
2"	2434S6	5	\$ 454
2 1/2"	2432S6	7	\$ 526
3"	2435S6	11	\$ 635
4"	2436S6	18	\$ 871
6"	2437S6	36	\$ 1,567
8**	2438S6*	80	\$ 2,770
8**	2438S6-2**	85	\$ 3,213


Note: 2" - 6" are dual rated to fit between both ASME class 150# & 300# flanges.

\*ASME 150# only

\*\*300# Flanged Dimensions

For viton seal consult with factory

**COMPACT PATENT DESIGN**

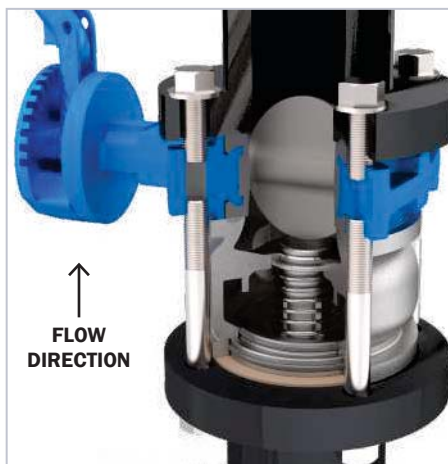

**SERIES 888**

- ▶ Seat Area Larger than Pipe Diameter
- ▶ No Screws or Fasteners
- ▶ Can be Serviced with Hand Tools
- ▶ Dual Pressure Rating

Above shown with Flomatic Model 888S6VFD and Sylax®3. Wafer check valve close coupled with butterfly valve. Butterfly valve can be operated with check valve in an "open" or "closed" position with no interference.

See page 17 for diagram.

**888S6VFD Discount Code B**



Patented

**888S6VFD** - All 316 stainless steel VFD compatible silent wafer style check valve, dual rated for class 150 and 300 flanges.

ASME 150#: Max Pressure 275 PSI at 100° F

ASME 300#: Max Pressure 475 PSI at 100° F

Consult factory for pressure rating standards.

**888S6R EPDM standard - seal drip tight**

SIZE	PART NO.	WGT.	LIST PRICE
2"	2434S6VFD	4	\$ 548
2 1/2"	2432S6VFD	6	\$ 636
3"	2435S6VFD	9	\$ 768
4"	2436S6VFD	16	\$ 1,053
6"	2437S6VFD	34	\$ 1,786
8**	2438S6VFD*	75	\$ 3,099

Note: 2" - 6" are dual rated to fit between both ASME class 150# & 300# flanges.

\* ASME 150# only

LEAD FREE NSF/ANSI 61



**Consult factory for complete listing of current NSF/ANSI 61 and 372 approvals OR visit [www.flomatic.com/approvals](http://www.flomatic.com/approvals)**

**402S6R/402S6 Discount Code B**



Patented

**402S6R/402S6** - All 316 stainless steel globe style silent check valve, designed for class 150 flanges.

Max Pressure 275 PSI at 100° F

Consult factory for pressure rating standards.

**402S6R EPDM standard - seal drip tight**

SIZE	PART NO.	WGT.	LIST PRICE
2"	2239S6R	13	\$ 1,092
2 1/2"	2240S6R	18	\$ 1,322
3"	2241S6R	23	\$ 1,442
4"	2242S6R	40	\$ 1,922
6"	2244S6R	75	\$ 3,484
8"	2245S6R	116	\$ 5,405
12"	2248S6R	306	\$ 15,613

**402S6 optional - Metal to Metal seat not drip tight**

SIZE	PART NO.	WGT.	LIST PRICE
2"	2239S6	13	\$ 994
2 1/2"	2240S6	18	\$ 1,092
3"	2241S6	23	\$ 1,311
4"	2242S6	40	\$ 1,747
6"	2244S6	75	\$ 3,167
8"	2245S6	116	\$ 4,914
12"	2248S6	306	\$ 14,194

Consult factory for additional sizes

STAINLESS STEEL CHECK VALVES 800.833.2040



**402BT/BTR/STR** Discount Code **B**



**402BT/402BTR/402STR** - Epoxy coated ductile iron silent check globe style, body design for use with class 150 flanges. Unleaded bronze metal to metal seating 2" - 12" sizes. Stainless Steel trim and resilient seat standard on 16", 20", 24" sizes (STR Models). Available on other sizes optional, see note below.

Ductile Iron 2" - 12" - Max Pressure 300 PSI at 150 °F  
 Ductile Iron 16", 20", 24" - Max Pressure 250 PSI at 150 °F  
 Cast Iron 14" & 18" - Max Pressure 150 PSI at 150 °F

Consult factory for pressure rating standards.

Note: For drip tight EPDM seal, add "R" to end of part number and 10% to list price.

SIZE	PART NO.	WGT.	LIST PRICE
2"	2239BT	13	\$ 368
2 1/2"	2240BT	18	\$ 493
3"	2241BT	23	\$ 540
4"	2242BT	40	\$ 710
5"	2243BT	51	\$ 1,242
6"	2244BT	75	\$ 1,147
8"	2245BT	116	\$ 1,804
10"	2247BT	194	\$ 2,783
12"	2248BT	306	\$ 5,505
14"	2249BT	380	POA
16"	2250STR	457	\$ 26,232
18"	2251BT	724	POA
20"	2252STR	750	\$ 31,859
24"	2254STR	1155	\$ 44,411

Note: Optional 316SS seat trim available, Consult factory for pricing.

Consult factory for additional sizes

**402BTR2** Discount Code **B**



**402BTR2** - Epoxy coated cast iron silent check globe style, body design for use with class 250 flanges. Bronze resilient seating with stainless steel spring (2"-12"), NITRILE (Buna-N) seal.

Max Pressure 400 PSI at 150 °F  
 Consult factory for pressure rating standards.

SIZE	PART NO.	WGT.	LIST PRICE
2 1/2"	2240BTR2	19	\$ 1,402
3"	2241BTR2	25	\$ 1,502
4"	2242BTR2	44	\$ 1,929
5"	2243BTR2	54	\$ 2,457
6"	2244BTR2	80	\$ 3,252
8"	2245BTR2	126	\$ 5,903
10"	2247BTR2	206	\$ 8,400
12"	2248BTR2	400	\$ 12,477

**888R/888** Discount Code **B**



**888R/888** - Epoxy coated ductile iron patented silent check, wafer style design with unleaded bronze poppet and seat. Designed to fit between class 150 and 300 flanges.

Note: Optional 316SS seat trim available, add ST to end of part number and 25% to list price. Consult factory.

ASME 150#: Max Pressure 300 PSI at 150 °F  
 ASME 300#: Max Pressure 500 PSI at 150 °F  
 Consult factory for pressure rating standards.

**888R Standard - EPDM drip tight seal**

SIZE	PART NO.	WGT.	LIST PRICE
2"	2434R	5	\$ 276
2 1/2"	2432R	7	\$ 314
3"	2435R	11	\$ 329
4"	2436R	18	\$ 441
5"	2433R	25	\$ 839
6"	2437R	36	\$ 779
8"*	2438R*	80	\$ 1,369
10"*	2439R*	129	\$ 2,075

**888 optional - Metal to Metal seat not drip tight**

SIZE	PART NO.	WGT.	LIST PRICE
2"	2434	5	\$ 255
2 1/2"	2432	7	\$ 282
3"	2435	11	\$ 295
4"	2436	18	\$ 387
5"	2433	25	\$ 763
6"	2437	36	\$ 696
8"*	2438*	80	\$ 1,246
10"*	2439*	129	\$ 1,886

Note: 2" - 6" are dual rated to fit between both ASME class 150# & 300#.

\* ASME 150# only

See page 9 for 316SS construction, model 888S6

**MODEL 888VFD (PATENTED)**



Model 888VFD by Flomatic  
 Features/Benefits and Operation

**888VFD** Discount Code **B**



**888VFD** - Epoxy coated ductile iron, wafer style, patented VFD design with 316 stainless steel poppet and seat and EPDM seal standard. Designed for class 150 and 300 flanges.

ASME 150#: Max Pressure 300 PSI at 150 °F  
 ASME 300#: Max Pressure 500 PSI at 150 °F  
 Consult factory for pressure rating standards.

SIZE	PART NO.	WGT.	LIST PRICE
2"	2434VFD	4	\$ 293
2 1/2"	2432VFD	6	\$ 334
3"	2435VFD	9	\$ 345
4"	2436VFD	16	\$ 445
5"	2433VFD	21	\$ 765
6"	2437VFD	34	\$ 831
8"*	2438VFD*	75	\$ 1,462
8"*	2438-2VFD**	75	\$ 1,890
10"*	2439VFD*	131	\$ 2,326

Note: 2" - 6" are dual rated to fit between both ASME class 150# & 300# flanges.

\* ASME 150 flange only  
 \*\* 300 Flanged Dimensions

See page 9 for 316SS construction body, model 888S6VFD

**895 SPLIT DISC®** Discount Code **B**



**895 SPLIT DISC®** - Cast iron body with epoxy coating and split disc design. Stainless disc with wafer connection class 125 flange 2" - 24" EPDM, PTFE bearing. Stainless steel spring hinge pin. Lifting ring standard above 4".

Temp Max: 180 °F (80 °C) Pressure Max: 200 PSI

SIZE	PART NO.	WGT.	LIST PRICE
2"	3000	3	\$ 212
2 1/2"	3001	4	\$ 245
3"	3002	7	\$ 272
4"	3003	9	\$ 347
5"	3004	22	\$ 559
6"	3005	18	\$ 588
8"	3006	31	\$ 875
10"	3007	49	\$ 1,322
12"	3008	82	\$ 1,986
14"	3009	120	\$ 4,330
16"	3010	170	\$ 4,576
18"	3011	180	\$ 7,195
20"	3012	250	\$ 8,731
24"	3013	360	\$ 12,641



**AIS (American Iron and Steel Act)**

Flomatic® offers domestically manufactured valve products that meet the requirements under EPA State Revolving Fund (SRF) for projects in compliance with the American Iron and Steel Act (AIS). Must be specified at time of quote and order.

**78** Discount Code **B**



**78** - Ductile iron body with epoxy coating. Flanged connection, class 150. Metal reinforced neoprene swing disc, other seals are available that are chemically resistant especially to chloramines. In-line serviceable.

Temp Max: 140 °F (60 °C) Pressure Max: 175 PSI

SIZE	PART NO.	WGT.	LIST PRICE
2 1/2"	2181	35	\$ 558
3"	2182	38	\$ 585
4"	2183	49	\$ 747
8"	2186	172	\$ 2,674

**78A** Discount Code **B**



**78A** - Ductile iron angle body with epoxy coating. Flanged connection, class 150. Metal reinforced neoprene swing disc, other seals are available that are chemically resistant especially to chloramines. In-line serviceable. (Same as ANSI 90° elbow dimension).

Temp Max: 140 °F (60 °C) Pressure Max: 175 PSI

SIZE	PART NO.	WGT.	LIST PRICE
3"	2182A	33	\$ 626
4"	2183A	46	\$ 846
6"	2185A	90	\$ 1,470
8"	2186A	172	\$ 2,805
10"	2187A	335	\$ 6,612
12"	2188A	432	POA

**93LW** Discount Code **B**



**93LW** - Swing check valve with outside lever and weight. Epoxy coated cast iron body. Flanged connection, class 125. Bronze trim with stainless steel shaft. Rubber seating standard. Imported, mainly for AG/Irrigation purposes, not municipal.

Temp Max: 180 °F (80 °C) Pressure Max: 200 PSI

SIZE	PART NO.	WGT.	LIST PRICE
2"	2804LW	38	\$ 1,543
3"	2806LW	62	\$ 1,664
4"	2807LW	90	\$ 1,751
6"	2809LW	163	\$ 2,304
8"	2810LW	282	\$ 3,432
10"	2811LW	481	\$ 6,493
12"	2812LW	653	\$ 9,689



## AIS (American Iron and Steel Act)

Flomatic® offers domestically manufactured swing check valve products that meet the requirements under EPA State Revolving Fund (SRF) for projects in compliance with the American Iron and Steel Act (AIS). Must be specified at time of quote and order.

**90LS/92LS** Discount Code **B**



**90LS/92LS** - Epoxy coated cast iron body. Meets AWWA C508 specifications. Flanged connection, class 125, with stainless steel shaft. Metal to metal standard or NITRILE (Buna-N) seal (Please add "R" to end of part number) Features external lever and spring.

For vertical installation add "V" to end part number.

Temp Max: 180 °F (80 °C)  
Pressure Max: 200 PSI: 2"-12", 150 PSI: 14"-30"

SIZE	PART NO.	WGT.	LIST PRICE
2"	2704LS	36	\$ 2,772
3"	2706LS	62	\$ 3,003
3"*	3706LS*	62	\$ 2,999
4"*	3707LS*	119	\$ 1,995
6"*	3709LS*	205	\$ 2,907
8"*	3710LS*	320	\$ 4,547
8"***	3710LS-18**	320	\$ 4,914
10"*	3711LS*	522	\$ 9,267
12"	2712LS	733	\$ 19,406
14"	2714LS	1,150	POA
16"	2716LS	1,630	POA
18"	2718LS	1,835	POA
20"	2720LS	2,500	POA
24"	2724LS	3,415	POA
30"	2730LS	4,950	POA

\* 92 Series, 3" consult factory for availability.  
\*\* Short Body 18" Face to Face.

**90LW/92LW** Discount Code **B**



**90LW/92LW** - Epoxy coated cast iron body. Meets AWWA C508 specifications. Flanged connection, class 125, with stainless steel shaft. Metal to metal standard or NITRILE (Buna-N) seal (Please add "R" to end of part number) Features external lever and weight.

For vertical installation add "V" to end part number.

Temp Max: 180 °F (80 °C)  
Pressure Max: 200 PSI: 2"-12", 150 PSI: 14"-30"

SIZE	PART NO.	WGT.	LIST PRICE
2"	2704LW	36	\$ 2,772
3"	2706LW	62	\$ 3,003
3"*	3706LW*	62	\$ 2,999
4"*	3707LW*	125	\$ 1,995
6"*	3709LW*	224	\$ 2,907
8"*	3710LW*	345	\$ 4,547
8"***	3710LW-18**	340	\$ 4,914
10"*	3711LW*	522	\$ 9,267
12"	2712LW	733	\$ 19,406
14"	2714LW	1,130	POA
16"	2716LW	1,530	POA
18"	2718LW	1,903	POA
20"	2720LW	2,383	POA
24"	2724LW	3,298	POA
30"	2730LW	5,550	POA

\* 92 Series, 3" consult factory for availability.  
\*\* Short Body 18" Face to Face.

**90CS/92CS** Discount Code **B**



**90CS/92CS** - Epoxy coated cast iron body. Meets AWWA C508 specifications. Flanged connection, class 125, with stainless steel shaft. Metal to metal standard or NITRILE (Buna-N) seal (Please add "R" to end of part number) Features external lever and weight and sealed end cushion system for adjustable rate of valve closure.

For vertical installation add "V" to end part number.

Temp Max: 180 °F (80 °C)  
Pressure Max: 200 PSI: 2"-12", 150 PSI: 14"-30"

SIZE	PART NO.	WGT.	LIST PRICE
2"	2704CS	28	\$ 3,649
3"	2706CS	75	\$ 4,080
3"*	3706CS*	75	\$ 3,599
4"*	3707CS*	195	\$ 3,728
6"*	3709CS*	325	\$ 4,351
8"*	3710CS*	355	\$ 5,839
8"***	3710CS-18**	355	\$ 6,344
10"*	3711CS*	600	\$ 13,990
12"	2712CS	825	\$ 19,061
14"	2714CS	1,150	POA
16"	2716CS	1,630	POA
18"	2718CS	1,953	POA
20"	2720CS	2,470	POA
24"	2724CS	3,415	POA
30"	2730CS	5,610	POA

\* 92 Series, 3" consult factory for availability.  
\*\* Short Body 18" Face to Face.

Stainless steel seats optional on Model 92 only, add 10% to list price.

\*92 series 3", 4", 6", 8", and 10".

All models available with limit switch, add \$700 to list price and add "LS" to end of part #.

SWING CHECK VALVES 800.833.2040



**745** Discount Code **B**  
**AIS COMPLIANT DESIGN**



**OPTIONAL BODY PLUGS SHOWN**

**745** - 45° Seat Flo-Flex®, Swing Check Valve epoxy coated Ductile Iron Body, class 150, AWWA C508, with Buna-N coated Disc, and stainless steel cover fasteners. The cover and bottom port are also drilled and tapped with NPT plug.

Optional body bosses drilled and tapped with stainless steel plugs, consult factory.

Temp Max: 140°F (60°C) Pressure Max: 250 PSI

SIZE	PART NO.	WGT.	LIST PRICE
3"	3382	40	\$ 967
4"	3383	60	\$ 1,158
6"	3385	103	\$ 1,825
8"	3386	216	\$ 2,989
10"	3387	362	\$ 4,857
12"	3388	628	\$ 6,817



Swing Check Valves by Flomatic Features/Benefits and Operation

**745** Discount Code **B**



**745** - 45° Seat Flo-Flex®, Swing Check Valve epoxy coated Ductile Iron Body, class 150, AWWA C508, with Buna-N coated Disc.

Temp Max: 140°F (60°C) Pressure Max: 250 PSI

SIZE	PART NO.	WGT.	LIST PRICE
2"	2380	27	\$ 561
2 1/2"	2381	35	\$ 655
3"	2382	40	\$ 696
4"	2383	68	\$ 827
6"	2385	128	\$ 1,301
8"	2386	235	\$ 2,345
10"	2387	380	\$ 3,736
12"	2388	620	\$ 5,244
14"	2390	740	\$ 7,800
16"	2391	1,035	\$ 10,550
18"	2392	1,540	\$ 12,619
20"	2393	1,835	\$ 15,539
24"	2394	2,475	\$ 23,438

Optional strainer available for foot valve operation.

**745BF** Discount Code **B**



**745 WITH BACKFLUSH DEVICE** - 45° Seat Flo-Flex®, Swing Check Valve epoxy coated Ductile Iron Body, class 150, AWWA C508, with a Buna-N coated Disc.

Temp Max: 140°F (60°C) Pressure Max: 250 PSI

SIZE	PART NO.	WGT.	LIST PRICE
2"	2380BF	28	\$ 1,137
2 1/2"	2381BF	36	\$ 1,243
3"*	3382BF*	42	\$ 1,518
4"*	3383BF*	71	\$ 1,782
6"*	3385BF*	133	\$ 2,490
8"*	3386BF*	241	\$ 4,125
10"*	3387BF*	402	\$ 6,480
12"*	3388BF*	652	\$ 9,129
14"	2390BF	774	POA
16"	2391BF	1,035	POA
18"	2392BF	1,540	POA
20"	2393BF	1,835	POA
24"	2394BF	2,475	POA

\*AIS configuration.

**745PI/LS** Discount Code **B**



**LIMIT SWITCH**

**745 WITH POSITION INDICATOR** - 45° Seat Flo-Flex®, Swing Check Valve epoxy coated Ductile Iron Body, class 150, AWWA C508, with a Buna-N coated Disc.

**745LS (Limit Switch)** add \$750 to list price below and replace "PI" with "LS" in the part number.

Temp Max: 140°F (60°C) Pressure Max: 250 PSI

SIZE	PART NO.	WGT.	LIST PRICE
3"*	3382PI*	40	\$ 2,063
4"*	3383PI*	68	\$ 2,200
6"*	3385PI*	128	\$ 3,025
8"*	3386PI*	235	\$ 4,152
10"*	3387PI*	380	\$ 6,202
12"*	3388PI*	620	\$ 9,133
14"	2390PI	740	POA
16"	2391PI	1,035	POA
18"	2392PI	1,540	POA
20"	2393PI	1,835	POA
24"	2394PI	2,475	POA

\*AIS configuration.

**745BFPI** Discount Code **B**



**745 WITH POSITION INDICATOR AND BACKFLUSH DEVICE** - 45° Seat Flo-Flex®, Swing Check Valve epoxy coated Ductile Iron Body, class 150, AWWA C508, with a Buna-N coated Disc.

Temp Max: 140°F (60°C) Pressure Max: 250 PSI

SIZE	PART NO.	WGT.	LIST PRICE
3"*	3382BFPI*	42	\$ 2,508
4"*	3383BFPI*	71	\$ 2,772
6"*	3385BFPI*	133	\$ 3,598
8"*	3386BFPI*	241	\$ 5,412
10"*	3387BFPI*	402	\$ 8,184
12"*	3388BFPI*	652	\$ 11,484
14"	2390BFPI	774	POA
16"	2391BFPI	1,035	POA
18"	2392BFPI	1,540	POA
20"	2393BFPI	1,835	POA
24"	2394BFPI	2,475	POA

\*AIS configuration.

**745ASC SURGE-STOPPER®** Discount Code **B**  
**NEW**



Patented

**745 SURGE-STOPPER® WITH ADJUSTABLE SPRING CLOSURE** - 45° Seat Flo-Flex®, Swing Check Valve epoxy coated Ductile Iron Body, class 150, AWWA C508, with a Buna-N coated Disc. Surge-Stopper® is a patented designed for high head, long pipe lines with field adjustable spring assisted closure. AIS configuration.

Temp Max: 140°F (60°C) Pressure Max: 250 PSI

SIZE	PART NO.	WGT.	LIST PRICE
3"	3382ASC	42	\$ 2,378
4"	3383ASC	70	\$ 2,598
6"	3385ASC	130	\$ 3,495

NOTE: Standard adjustable valve cracking pressure is factory set at 2 PSI. Other adjustable ranges are available.

Consult factory for other sizes

Add "S" to end of part number for Stainless Steel fasteners and add 10% to list price. For 2" NPT Stainless Steel tapped plug in cover add -2P to end of part # and \$150 adder. Consult factory for low pressure and/or vacuum applications.

**508 Discount Code B**



**508** - Ductile iron body with epoxy coating. Standard corrosion resistant phenolic "Sinking Ball", with resilient seat, and two bolt access cover. Also available with special "Floating Ball" for flood control or air vent application—consult factory for application and pricing.

Temp Max: 180 °F (80 °C) Pressure Max: 150 PSI

SIZE	PART NO.	WGT.	LIST PRICE
1"	3232	3.5	\$ 191
1 1/4"	3233	4.5	\$ 195
1 1/2"	3234	6	\$ 201
2"	3235	8	\$ 236
2 1/2"	3236	11.5	\$ 552
3"*	2044*	30	\$ 567
4"*	2045-1**	56	\$ 1,028

\*3" has no access cover, quick disconnect valve system.

\*\*Connection is ANSI 125# flanged.

**508S6 Discount Code B**



**508S6** - All 316 Stainless steel body. Standard corrosion resistant phenolic "Sinking Ball", with resilient seat, and two bolt access cover. Also available with special "Floating Ball" for flood control or air vent application—consult factory for application and pricing.

Temp Max: 180 °F (80 °C) Pressure Max: 150 PSI

SIZE	PART NO.	WGT.	LIST PRICE
1 1/4"	3233S6	4.5	\$ 226
1 1/2"	3234S6	6	\$ 252
2"	3235S6	8	\$ 282

**77 Discount Code B**



**77 - Auto-Vac® Vacuum Breaker** - This 1" valve is available in stainless steel and PVC. All internal parts are engineered composite, with a stainless steel disc and resilient seat. Used to prevent water hammer in wastewater valves.

Temp Max: 180 °F (80 °C) Pressure Max: 400 PSI

MATERIAL	PART NO.	CASE QTY.	LIST PRICE
PVC	4701P	12	\$ 47
Stainless Steel	4701SS	12	\$ 57



Ball Check Valves by Flomatic Features/Benefits and Operation

**408<sup>2</sup> Discount Code B**



**408<sup>2</sup>** - AIS Compliant ductile iron body with epoxy coating and access port, flanged connection class 150. NITRILE (Buna-N) covered metal sinking ball. Stainless steel fasteners. Also available with special "Floating Ball" for flood control or air vent application—consult factory for application and pricing.

Temp Max: 180 °F (80 °C) Pressure Max: 150 PSI

SIZE	PART NO.	WGT.	LIST PRICE
3"	3144	37	\$ 737
4"*	2145-2*	56	\$ 860
4"	3145	56	\$ 960
5"*	2143*	85	\$ 1,680
6"	3146	100	\$ 1,740
8"	3147	186	\$ 3,116
10"	3148	315	\$ 7,280
12"	3149	417	\$ 10,233
14"*	2150*	790	POA

\*Non AIS compliant.

**408<sup>S6</sup> Discount Code B**



**408<sup>S6</sup>** - All 316 Stainless steel body and access port, flanged connection class 150. Nitrile (Buna-N) covered metal sinking ball. Stainless steel fasteners. Also available with special "Floating Ball" for flood control or air vent application—consult factory for application and pricing. Complies with the American Iron and Steel Act, AIS Compliant.

Temp Max: 180 °F (80 °C) Pressure Max: 150 PSI

SIZE	PART NO.	WGT.	LIST PRICE
3"	3144S6	37	\$ 3,109
4"	3145S6	56	\$ 4,004
6"	3146S6	117	\$ 6,619

Consult factory for other sizes.

Ball check valves are recommended for flow velocity of 3' to 5' per sec. For higher flow, consult factory.

**208 Discount Code B**



**208** - Cast iron body with epoxy coating and clean-out port. Threaded female x female connection. Features NITRILE (Buna-N) "Sinking Ball".

Temp Max: 180 °F (80 °C) Pressure Max: 150 PSI

SIZE	PART NO.	WGT.	LIST PRICE
1 1/4"	2141	4.5	\$ 98
1 1/2"	2142-0	9.5	\$ 132
2"	2142	9	\$ 132

**208/S Discount Code B**



**208T/S** - Corrosion resistant PVC body. Threaded female x female connection. NITRILE (Buna-N) self-cleaning ball. E-Z access port with NITRILE (Buna-N) seal. Also available with socket weld—change part number from "T" to "S"—same pricing.

Temp Max: 150 °F (65 °C) Pressure Max: 100 PSI

SIZE	PART NO.	WGT.	LIST PRICE
1"	2131T	1	\$ 51
1 1/4"	2132T	1	\$ 54
1 1/2"	2133T	2	\$ 83
2"	2134T	2	\$ 83

Note: For BSPP threads, change part number from "T" to "P".

NOT FOR GROUND BURIAL.



Pictured with optional Auto-Vac®, add "-1" to the end of Ball Check part number and \$ 100 to list price. Available on all models.



Remotely monitor ball position (open or close) with this proximity sensor. Add "PRX" to the end of part number. Consult Factory for pricing.

**OPTIONAL FLOATING BALL - CONSULT FACTORY**

**OPERATION OF "THE FLOATING BALL" APPLICATIONS for Model 408FB and 508FB**

TO AVOID OVERFLOW OF WATER RISING AND ALSO ALLOW AIR EVACUATION IN FILLING OF TANKS OR PIPES (AIR-VENT).



VERTICAL MOUNTING  
Seat up

**HORIZONTAL MOUNTING**

Install the valve with ball access down. The arrow shows the direction in which the liquid is moving.



**54-B** Discount Code **B**



**Flo-E-Centric® Plug Valve with Bare Stem Model 54-B** - Class 150 Ductile iron Body ASTM A536 65-45-12. Epoxy Powder, Buna-N Plug, V-Type Packing, Self Lubricating Type 316 Stainless Steel thrust bearing.

Temp Max: 180 °F (80 °C) Pressure Max: 200 PSI

SIZE	PART NO.	WGT.	LIST PRICE
2" Threaded	54200004B	15	\$ 349
3"	54000006B	40	\$ 657
4"	54000007B	71	\$ 891
6"	54000009B	137	\$ 1,648
8"	54000010B	190	\$ 2,419
10"	54000011B	346	\$ 3,642
12"	54000012B	441	\$ 4,908

**54-4** Discount Code **B**



**Flo-E-Centric® Plug Valve with 2" AWWA Operating Nut Model 54-4** - Class 150 Ductile iron Body ASTM A536 65-45-12. Epoxy coated, Buna-N Plug, V-Type Packing, Self Lubricating Type 316 Stainless Steel thrust bearing.

Temp Max: 180 °F (80 °C) Pressure Max: 200 PSI

SIZE	PART NO.	WGT.	LIST PRICE
2" Threaded	542000044	19	\$ 371
3"	540000064	45	\$ 707
4"	540000074	76	\$ 921
6"	540000094	142	\$ 1,746
8"	540000104	195	\$ 2,508

**HANDLE** Discount Code **B**



**Flo-E-Centric® Plug Valve Handle for 2" Operating Nut (for Model 54-4 above)** - Epoxy coated.

PART NO.	DESCRIPTION	LIST PRICE
1105-50-11	For 2" Valve	\$ 32
1105-200-09	For 3" - 8" Valves	\$ 94



Shutoff Valves by Flomatic Features/Benefits, Selection & Operation

**54-0** Discount Code **B**



**Flo-E-Centric® Plug Valve with Gear Box Model 54-0 (Direct Mounted)** - Class 150 Ductile iron Body ASTM A536 65-45-12. Epoxy coated, Buna-N Plug, V-Type Packing, Self Lubricating Type 316 Stainless Steel thrust bearing.

Temp Max: 180 °F (80 °C) Pressure Max: 200 PSI

SIZE	PART NO.	WGT.	LIST PRICE
3"	540000060	55	\$ 719
4"	540000070	88	\$ 986
6"	540000090	165	\$ 1,745
8"	540000100	256	\$ 2,661
10"	540000110	439	\$ 3,990
12"	540000120	533	\$ 4,830

**54-A** Discount Code **B**



**Flo-E-Centric® Plug Valve w/Actuator - Model 54-0** with 120VAC electric actuator, for open/close service with manual hand-wheel override.

Temp Max: 180 °F (80 °C) Pressure Max: 200 PSI

SIZE	PART NO.	WGT.	LIST PRICE
2" Threaded	542000040A	42	\$ 2,373
3"	540000060A	78	\$ 2,888
4"	540000070A	120	\$ 4,415
6"	540000090A	188	\$ 5,536
8"	540000100A	322	\$ 7,837
10"	540000110A	478	\$ 8,405
12"	540000120A	573	\$ 9,879

For modulating service add smart card option to list price and "M" to part #. Other options available. Consult Factory. See smart card option on page 16.

Actuator sizing assumes maximum differential pressure of 50 PSI.

**54-3** Discount Code **B**



**Flo-E-Centric® MJ Plug with buried service gear** Series 5400 valves are Ductile iron Body Epoxy coated, Buna-N Plug, V-Type Packing, Self Lubricating Type 316 Stainless Steel thrust bearing. Mechanical joint dimensions complies with AWWA C111..

Temp Max: 180 °F (80 °C) Pressure Max: 200 PSI

SIZE	PART NO.	WGT.	LIST PRICE
4"	543000087	88	\$ 1,077
6"	543000097	125	\$ 1,812
8"	543000107	200	\$ 2,319
10"	543000117	359	\$ 3,502
12"	543000127	479	\$ 4,468
14"	543000147	581	\$ 6,914
16"	543000167	1082	\$ 8,407
18"	543000187	1300	\$ 11,730
20"	543000207	1828	\$ 16,434
24"	543000247	2271	\$ 26,439



## Flo-E-Centric® Plug Valves

- AWWA C517
- Epoxy coated (inside & out)
- Stainless steel thrust bearing
- Spherical BUNA-N coated DI plug
- Ductile iron body: ASTM A536 65-45-12
- 100% full ported (2" to 8")
- Standard ported (10" to 24")
- 98% welded nickel seat
- Stainless steel hardware
- 2" to 8" rated to 200 PSI
- 10" and 12" rated to 175 PSI
- V-type packing

# FLANGED BUTTERFLY VALVES AWWA C504



## AZURE® MODEL 45 GEAR OPERATED Discount Code B



**MODEL 45 (Gear Operated)** - Ductile iron flanged body. ASTM A536 ductile iron disc with stainless type 316 edge. Seat standard NBR (EPDM optional) vulcanized. Designed to AWWA standard C504, class 150B. Electric/pneumatic actuation available.

Temp Max: 180°F (80°C) Pressure Max: 200 PSI

SIZE	PART NO.	WGT.	LIST PRICE WITH GEAR
3"	450000060	43	\$ 731
4"	450000070	54	\$ 863
6"	450000090	74	\$ 1,165
8"	450000100	134	\$ 1,484
10"	450000110	188	\$ 2,037
12"	450000120	261	\$ 3,004
14"	450000140	380	\$ 4,475
16"	450000160	414	\$ 5,648
18"	450000180	532	\$ 6,307
20"	450000200	653	\$ 6,701
24"	450000240	739	\$ 10,802

## AZURE® MODEL 45 ELECTRIC ACTUATED Discount Code B



**MODEL 45 - (Electric Actuated)** - Ductile iron flanged body. ASTM A536 ductile iron disc with stainless type 316 edge. Seat standard NBR (EPDM optional) vulcanized. 120VAC on/off electric actuator with manual hand-wheel override for open/close service. Other options available consult factory.

Temp Max: 180°F (80°C) Pressure Max: 200 PSI

SIZE	PART NO.	WGT.	LIST PRICE WITH ACTUATOR
3"	45000006A	61	\$ 3,324
4"	45000007A	72	\$ 3,579
6"	45000009A	82	\$ 4,763
8"	45000010A	165	\$ 5,714
10"	45000011A	220	\$ 7,253
12"	45000012A	300	\$ 8,360
14"	45000014A	530	\$ 9,856
16"	45000016A	564	\$ 13,882
18"	45000018A	686	\$ 18,070
20"	45000020A	823	POA
24"	45000024A	910	POA

Actuator sizing assumes 50 PSI max differential pressure.

For modulating service add smart card option to list price and "M" to part #.

## AZURE® MODEL 45 LEVER OPERATED Discount Code B



**MODEL 45 (Lever Operated)** - Ductile iron flanged body. ASTM A536 ductile iron disc with stainless type 316 edge. Seat standard NBR (EPDM optional) bonded and vulcanized. Designed to AWWA standard C504, class 150B. Electric/pneumatic actuation available.

Temp Max: 180°F (80°C) Pressure Max: 200 PSI

SIZE	PART NO.	WGT.	LIST PRICE WITH LEVER
3"	450000061	43	\$ 690
4"	450000071	54	\$ 791
6"	450000091	74	\$ 1,123

- ▶ Proof of design available upon request
- ▶ Fusion epoxy paint
- ▶ V-type packing
- ▶ Seat Buna-N
- ▶ Meets AWWA C504
- ▶ NSF/ANSI 61 Certified

## Butterfly & Plug Valve Options Inquire with Factory

- ▶ Gear Operator
- ▶ Chain-wheel Operator
- ▶ Shaft Extensions
- ▶ Actuation: Electric or Pneumatic

### ELECTRIC ACTUATORS

- ▶ 110/120 VAC standard - Inquire for other voltages
- ▶ Battery backup for power loss positioning
- ▶ 'Smart Card' options for valve positioning. (See page 16)
  - ▶ Basic 4-20 mA input and output
  - ▶ Can be configured for 1-5 V, 0-5 V, 0-10 V or digital command
  - ▶ Default setting for loss of command
  - ▶ Feedback
  - ▶ Repeat cycle timer
  - ▶ Log rate control

### PNEUMATIC ACTUATORS

- ▶ Double-acting
- ▶ Spring return





# SYLAX® 3

Flomatic® SYLAX® 3, Strong DI body, EPDM vulcanized seat, Stainless Steel stem and disc, 250 PSI bi-directional pressure rating, 230 °F max. temperature rating, NSF/ANSI 61 certified, for use with class 125/150# flanges with lockable 10 position handle and ISO 5211 top flange for easy actuation. See page 17 for close coupling with our model 888VFD wafer style check valve (see page 9 & 10).



SYLAX®3 WAFER (SS) Discount Code B



SYLAX®3 LUG (SS) Discount Code B



SYLAX®3 LUG ELECTRIC ACTUATED (SS) Discount Code B



Temp Max: 230 °F (110 °C), Pressure Max: 250 PSI

SYLAX 3 WAFER with LEVER HANDLE			For gear operator add 'G' to part #.	* For 120V on/off actuation add 'A' to part #.
SIZE	PART #	LIST PRICE		
2"	S3W04	\$ 114	\$ 204	\$ 1,609
2 ½"	S3W05	\$ 124	\$ 212	\$ 1,616
3"	S3W06	\$ 140	\$ 241	\$ 1,627
4"	S3W07	\$ 182	\$ 276	\$ 1,703
5"	S3W08	\$ 258	\$ 352	\$ 1,947
6"	S3W09	\$ 308	\$ 382	\$ 2,232
8"	S3W10	\$ 551	\$ 673	\$ 2,745
10"	S3W11	\$ 757	\$ 884	\$ 3,312
12"	S3W12	\$ 1,171	\$ 1,313	\$ 3,962

\*Actuator sizing assumes maximum differential pressure of 50 PSI

SYLAX 3 LUG with LEVER HANDLE			For gear operator add 'G' to part #.	* For 120V on/off actuation add 'A' to part #.
SIZE	PART #	LIST PRICE		
2"	S3L04	\$ 150	\$ 245	\$ 1,665
2 ½"	S3L05	\$ 152	\$ 247	\$ 1,673
3"	S3L06	\$ 159	\$ 253	\$ 1,700
4"	S3L07	\$ 216	\$ 306	\$ 1,764
5"	S3L08	\$ 298	\$ 395	\$ 2,305
6"	S3L09	\$ 361	\$ 452	\$ 2,337
8"	S3L10	\$ 705	\$ 851	\$ 2,858
10"	S3L11	\$ 961	\$ 1,112	\$ 3,458
12"	S3L12	\$ 1,271	\$ 1,450	\$ 4,185

\*Actuator sizing assumes maximum differential pressure of 50 PSI

GEAR OPERATOR Discount Code B



VALVE SIZE	PART NUMBER	LIST PRICE
2 - 4"	149G037000	\$ 98
5 - 6"	149G037001	\$ 98
8 - 10"	149G037002	\$ 165
12"	149G037004	\$ 202


SMART CARD Discount Code B



**SMART CARD** - Will fit in Flomatic FCEL Electric Actuator for modulating service, basic 4-20 ma input and output, providing 450 points of resolution. Able to be configured for 1-5 V, 0-5 V, 0-10 V or digital command. Provides default setting upon loss of command. Provides easy setting of open/closed positions for reverse or direct acting without wiring changes.

Pricing adder \$1,650 to install DHC Modulating components in FCEL electric actuator. To order valve with smart card add "M" to the end of valve part number.

# Installation of Patented Compact Model 888VFD Wafer Check Valve with Butterfly Valve

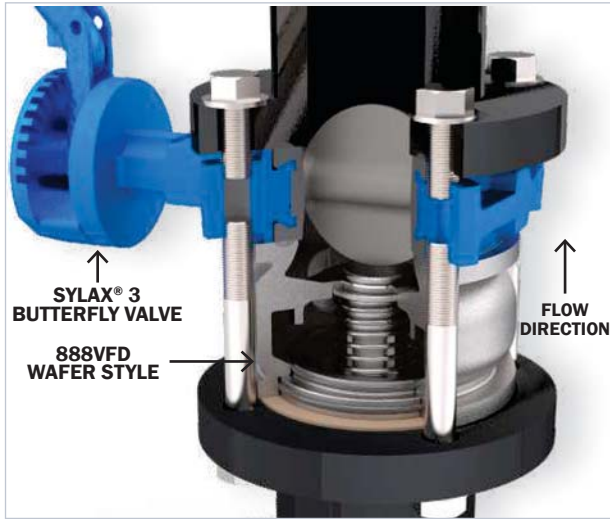


Shown with Flomatic® Model 888S6VFD wafer check valve close coupled with Sylox®3 butterfly valve. Butterfly valve can be operated with check valve in an “open” or “closed” position with no interference.

The patented Flomatic® Model 888VFD Wafer Check Valves can be close coupled with a Butterfly valve without a spool piece (see page 9 & 10).


The Butterfly valve can be operated with the check valve in an “open” or “closed” position with no interference in 2” thru 6” sizes. The overall installation length is much shorter than a traditional combination of a wafer style check valve, butterfly valve, and spool piece.

A traditional Wafer Check valve cannot be close coupled with a Butterfly valve without a spacer or spool piece, longer bolts and additional flange gasket. This spool piece adds weight, takes up more space, parts and installation expense.

### Traditional Installation

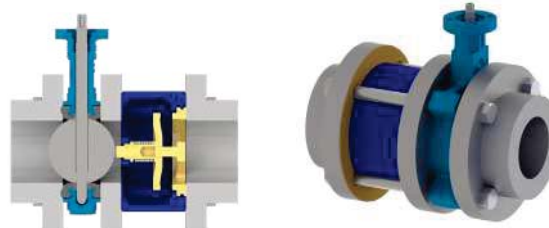

### New Patented Compact Design (No Spool Piece Needed)

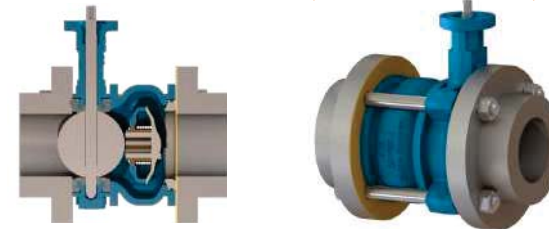

**YouTube** search: FLOMATIC VFD  
Model 888VFD by Flomatic  
Features/Benefits and Operation




Consult factory for complete listing of current NSF/ANSI 61 and 372 approvals

OR visit [www.flomatic.com/approvals](http://www.flomatic.com/approvals)

## BOLT CHART: Dimensions (Direct Mounting to Sylox Lug Style Butterfly Valve)

SIZE		PART NUMBER	# OF BOLTS	BOLT SIZE	LENGTH OF BOLT (INLET)	LENGTH OF BOLT (OUTLET)
INCH	MM					
2"	50	2434VFD	4	5/8"-11	4 1/2"	1 5/8"
2 1/2"	65	2432VFD	4	5/8"-11	4 3/4"	1 7/8"
3"	75	2435VFD	4	5/8"-11	5"	1 7/8"
4"	100	2436VFD	8	5/8"-11	6"	2"
5"	125	2433VFD	8	3/4"-10	6 3/4"	2"
6"	150	2437VFD	8	3/4"-10	7 1/2"	2 1/4"

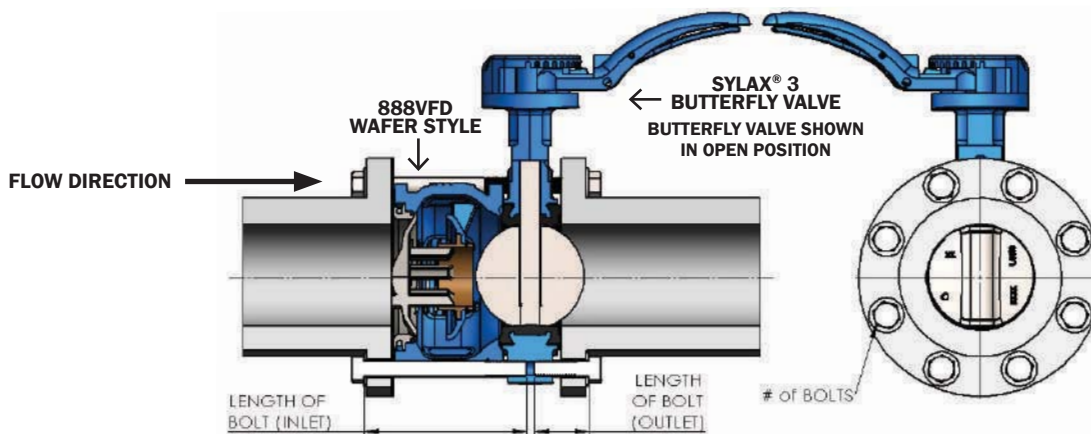



**60SE Discount Code A**



**60SE-ENVIRO FOOT VALVE** - body with threaded female connection. Features a NITRILE (Buna-N) seal, acetal poppet (2½", 3" and 4" have bronze poppets) stainless steel spring and strainer.

Temp Max: 180 °F (80 °C)  
Pressure Max: 250 PSI (½" size 150 PSI)

SIZE	PART NO.	WGT.	CASE QTY.	LIST PRICE
½"*	5820E*	.1	100	\$ 48.54
¾"	4100E	.3	100	\$ 47.37
1"	4101E	.8	50	\$ 49.98
1 ¼"***	4102E**	.8	50	\$ 59.99
1 ½"	4103E	1	36	\$ 61.00
1 ¾"	4104E	1.6	25	\$ 98.00
2"	4105E	2.1	16	\$ 155.00
2 ½"	4106E	6		\$ 514.00
3"	4107E	11		\$ 708.00
4"	4108E	19		\$ 1,181.00

\*Polyethylene strainer

\*\*Model 600S (4102E) will pass through a 2" pipe.

For high temperature: add HTE to the end of part # and 25% to list.

**190D/193D/190P Discount Code A**



**190D** - Acetal body and strainer, Nylon 11 poppet. Stainless steel spring and NITRILE (Buna-N) seal.

**193D** - Similar to the 190D with one-piece acetal body and strainer.

**190P** - Polypropylene body and strainer. Stainless steel spring and VITON seal.

Temp Max: 140 °F (60 °C) Pressure Max: 150 PSI

SIZE	PART NO.	MODEL	WGT.	CASE QTY.	LIST PRICE
¾"	5619	193D	.03	10	\$ 20.44
¾"	5726	190P	.03	10	\$ 20.44
½"	5620	193D	.03	10	\$ 35.21
¾"	5728	190P	.08	10	\$ 39.74
1 ½"	5724	190D	.28	6	\$ 44.29
2"	5725	190D	.41	6	\$ 101.06

**901 Discount Code A**



**901** - Non-corrosive acetal check valve body and guide. Insert connection. Features NITRILE (Buna-N) seal and stainless steel spring.

Temp Max: 180 °F (80 °C) Pressure Max: 150 PSI

SIZE	PART NO.	WGT.	LIST PRICE
¾"	2011	.1	\$ 10.82
½"	2000	.18	\$ 11.33
¾"	2001	.35	\$ 11.46
1"	2030	.5	\$ 18.39

**333E Discount Code A**



**333E-ENVIRO FOOT VALVE** - body with high strength acetal poppet. Tapered stainless steel strainer, end cap, spring and fasteners. NITRILE (Buna-N) seal.

Temp Max: 180 °F (80 °C) Pressure Max: 250 PSI

SIZE	PART NO.	WGT.	CASE QTY.	LIST PRICE
1"	4171E	.6	50	\$ 64.28
1 ¼"	4172E	.8	36	\$ 75.24

**100MP Discount Code A**



**100MP** - High-strength Noryl® GTX 830 Body with NITRILE (Buna-N) seal and polypropylene follower. Threaded male x female connection.

Temp Max: 150 °F (65 °C) Pressure Max: 300 PSI

SIZE	PART NO.	CASE QTY.	LIST PRICE
1 ¼" M x 1" F	4221MP	49	\$ 25.36
1 ¼" M x 1 ¼" F	4242MP	49	\$ 27.56

Bulk pricing available.

**104P Discount Code A**



**104P** - Reinforced nylon body with threaded female connection. Polyethylene strainer, polyethylene/acetal poppet. NITRILE (Buna-N) seal and stainless steel spring.

Temp Max: 150 °F (65°C) Pressure Max: 150 PSI

SIZE	PART NO.	WGT.	CASE QTY.	LIST PRICE
1"	5732	.13	50	\$ 24.87
1 ¼"	5733	.21	36	\$ 30.28

**333DPE Discount Code A**



**333DPE-ENVIRO FOOT VALVE** - body, but with dual purpose male and female threads.

Temp Max: 180 °F (80 °C) Pressure Max: 250 PSI

SIZE	PART NO.	WGT.	CASE QTY.	LIST PRICE
1 ¼" M x 1" F	4181E	.5	50	\$ 70.34
1 ½" M x 1 ¼" F	4182E	.8	36	\$ 79.87

**124P Discount Code A**



**124P- FOOT VALVE** - features a simple flow through design with corrosion resistant parts and feature a tapered composite strainer and poppet.

Temp Max: 140 °F (60 °C) Pressure Max: 150 PSI

SIZE	PART NO.	WGT.	LIST PRICE
1" - 1 ¼"*	5728PI*	.24	\$ 23.79
¾" - 1 ½"***	5728P**	.31	\$ 27.04
2" Female	5735P	.25	\$ 44.34

\* 2 in 1 combo barbed insert 1" & 1 ¼"

\*\* 4 in 1 combo, male NPT threads ¾" - 1 ¼"

**297D/290P Discount Code A**



**The 297D** - is an acetal body check valve. Threaded female x female construction. Features a VITON seal, Nylon 11 poppet and stainless steel spring.

Temp Max: 180 °F (80 °C) Pressure Max: 150 PSI


SIZE	PART NO.	WGT.	LIST PRICE
¾"	5359	.04	\$ 29.75
½"	5239	.06	\$ 38.93

**The 290P** is a Polypropylene body check valve and poppet with stainless steel spring and VITON seal.

SIZE	PART NO.	WGT.	LIST PRICE
½"	5357	.06	\$ 40.02
¾"	5358	.06	\$ 48.67

**PRODUCT APPLICATION 901**

Insert connection used in conjunction with a water meter when protection from contamination is required



WATER METER

**302BT** Discount Code **B**



**302BT** - Epoxy coated ductile iron, foot valve with a globe style body design for use with class 150 flanges. Unleaded bronze trim with an EPDM seal and 316 stainless steel strainer for 2" - 12" sizes. Stainless Steel trim and resilient seat standard on 16", 20", 24" sizes (ST Models). Available on other sizes optional. See note below.

Ductile Iron 2" - 12" - Max Pressure 300 PSI at 150 °F  
 Ductile Iron 16", 20", 24" - Max Pressure 250 PSI at 150 °F  
 Cast Iron 14", 18" Max Pressure 150 PSI at 150 °F

Consult factory for pressure rating standards.

SIZE	PART NO.	WGT.	LIST PRICE
2"	4763BT	23	\$ 1,028
2 1/2"	4768BT	30	\$ 1,039
3"	4769BT	37	\$ 1,081
4"	4770BT	63	\$ 1,307
5"	4771BT	80	\$ 1,767
6"	4772BT	100	\$ 1,989
8"	4774BT	160	\$ 2,905
10"	4775BT	260	\$ 4,187
12"	5416BT	410	\$ 6,323
14"	5417BT	500	POA
16"	5418ST	650	\$ 28,613
18"	5419BT	850	POA
20"	5420ST	1050	\$ 35,194
24"	5422ST	1440	\$ 52,920

Consult factory for additional sizes

**VISIT OUR WEBSITE AT  
 WWW.FLOMATIC.COM  
 OR CALL 800.833.2040**

**345** Discount Code **B**



**345** - 45° Seat Flo-Flex®, Swing Foot Valve Epoxy coated Ductile Iron Body, class 150, with Buna-N coated Disc, stainless steel fasteners, with an all 316 stainless steel strainer. The cover and bottom port are also drilled and tapped with NPT plug. Vertical flow up only.

Temp Max: 140 °F (60 °C) Pressure Max: 250 PSI

SIZE	PART NO.	WGT.	LIST PRICE
3"	3382F	40	\$ 1,594
4"	3383F	60	\$ 1,670
6"	3385F	103	\$ 2,094
8"	3386F	216	\$ 4,335
10"*	3387F*	362	\$ 6,731
12"*	3388F*	628	\$ 9,826

\* Consult factory for availability

**302S6** Discount Code **B**



**302S6** - All 316 stainless steel body, foot valve with a globe style body design for use with class 150 flanges. Features an EPDM seal and a 316 stainless steel strainer.

Max Pressure 275 PSI at 100 °F  
 Consult factory for pressure rating standards.

SIZE	PART NO.	WGT.	LIST PRICE
2"	4763S6	23	\$ 1,607
2 1/2"	4768S6	30	\$ 1,820
3"	4769S6	37	\$ 1,889
4"	4770S6	63	\$ 2,454
6"	4772S6	100	\$ 3,964
8"	4774S6	160	\$ 6,511
12"	5416S6	410	\$ 18,168

**812XTF** Discount Code **B**



**812XTF** - All 316 stainless steel, threaded female connection. Metal to metal seating and Teflon O-ring.

2"- 4" available with socket weld connection. Consult factory for pricing.

\* Temp Max: 400 °F (200 °C) \* Pressure Max: 300 PSI

SIZE	PART NO.	WGT.	LIST PRICE
1/2"	2420XTF	2	\$ 359
3/4"	2421XTF	4	\$ 409
1"	2422XTF	5	\$ 579
1 1/4"	2423XTF	9	\$ 705
1 1/2"	2424XTF	12	\$ 782
2"	2425XTF	14	\$ 930
2 1/2"	2426XTF	14	\$ 1,626
3"	2427XTF	25	\$ 1,873
4"	2428XTF	39	\$ 2,132
5"	2429XTF	62	\$ 4,540
6"	2430XTF	80	\$ 5,406
8"	2431XTF	140	\$ 9,450

\* Consult factory for temp. & pressure rating.

**357** Discount Code **A**



**357** - Cast iron body and strainer. Threaded female connection. Hinged leather seat.

Temp Max: 80 °F (27 °C) Pressure Max: 20 PSI

SIZE	PART NO.	WGT.	LIST PRICE
1 1/4"	4962	3	\$ 263
1 1/2"	4963	3	\$ 265
2"	4964	6	\$ 275
3"	4966	13	\$ 423
4"	4967	20	\$ 582
6"	4969	45	\$ 984
8"	4970	99	\$ 2,150

**80S6FVFD** Discount Code **A**



**80S6FVFD** - All 316 stainless steel body threaded foot valve. Stainless steel spring, poppet, strainer and Buna-N seal, Viton optional.

Temp Max: 180 °F (80 °C) Pressure Max: 400 PSI

SIZE	PART NO.	WGT.	LIST PRICE
1"	4031S6FVFD	2.1	\$ 289
1 1/4"	4032S6FVFD	2.4	\$ 390
1 1/2"	4033S6FVFD	5.0	\$ 412
2"	4034S6FVFD	7.0	\$ 635
3"	7938S6FVFD	15	\$ 1,623
4"	7939S6FVFD	30	\$ 2,618
6"	4089S6FVFD	75	\$ 7,427
8"	4090XSSVFD	105	\$ 9,549
10"	4091XSSF	190	\$ 17,103

**333SS** Discount Code **A**



**333SS - FOOT VALVE** - All 303 Stainless steel body with high strength acetal poppet. Tapered stainless steel strainer, end cap, spring and fasteners. NITRILE (Buna-N) seal.

Temp Max: 180 °F (80 °C) Pressure Max: 250 PSI

SIZE	PART NO.	WGT.	CASE QTY.	LIST PRICE
1"	4171SS	.6	50	\$ 141
1 1/4"	4172SS	.8	36	\$ 157

**63** Discount Code **B**



**63** - Cast iron body with epoxy coating. Features threaded female connection. NITRILE (Buna-N) seal, high strength non-metallic or unleaded bronze or ductile iron poppet, stainless steel spring. Heavy duty polyethylene strainer.

Temp Max: 180 °F (80 °C) Pressure Max: 250 PSI

SIZE	PART NO.	WGT.	LIST PRICE
2"*	4764*	4	\$ 120
2 1/2"	4765	5	\$ 166
3"	4766	9	\$ 207
4"	4767	17	\$ 255
6"*	4789VFD**	36	\$ 1,048

\*2" Acetal guide.

\*\* Galvanized Strainer Only.

2 1/2" - Unleaded bronze guide. 3" - 6" Ductile iron poppet. For Municipal applications see 302BT or 302S6 below



**16FL STRAINER** Discount Code **B**



**16FL STRAINER** - All 316 Stainless steel body, flanged with 316SS internal strainer. Standard 20 mesh replacement screens optional 40, 60, 80 and 100 mesh screens (fit inside of 20 mesh). Class 150.

Standard 20 Mesh - if optional 40, 60, 80, or 100 add to end of part number:

40 Mesh = 040 to end of part number  
60 Mesh = 060 to end of part number  
80 Mesh = 080 to end of part number  
100 Mesh = 100 to end of part number

X in part # below 1 for stainless steel and 2 for carbon

Temp Max: 800 °F Pressure Max: 600 PSI

SIZE	PART NO.	STAINLESS LIST PRICE	CARBON LIST PRICE
1"	S0014-X-0300	\$ 518	\$ 508
1 1/2"	S0154-X-0300	\$ 919	\$ 901
2"	S0024-X-0300	\$ 1,164	\$ 1,141

Strainers supplied with FNPT tapped retainer cap for blow off outlet.

Strainers supplied with PTFE cap seal.

Optional graphite cap seal add: \$15.00

**6SE STRAINER** Discount Code **A**



**6SE STRAINER** - Unleaded bronze body with threaded female connection. Stainless steel strainer with unleaded bronze. Stainless steel or plastic caps.

SIZE	PART NO.	WGT.	CASE QTY.	LIST PRICE
1/2"	4399E	.1	10	\$ 34
3/4"	4300E	.2	100	\$ 46
1"	4301E	.6	49	\$ 67
1 1/4"	4302E *	.6	36	\$ 88
1 1/2"	4303E *	1.2	25	\$ 91
2"	4304E *	2.4	16	\$ 124
2 1/2"	4305E	3		\$ 316
3"	4306E	7.2		\$ 465
4"	4307E	14		\$ 890

\* End caps on strainer are composite.

**6SS STRAINER** Discount Code **A**



**6SS STRAINER** - All 303 stainless steel body with threaded female connection. Stainless steel strainer with stainless steel or plastic caps.

SIZE	PART NO.	WGT.	CASE QTY.	LIST PRICE
1"	4371SS	.6	49	\$ 160
1 1/4"	4372SS	.6	36	\$ 180

**16 STRAINER** Discount Code **B**



**16 STRAINER** - All 316 Stainless steel body, threaded FNPT "Y-Type" strainer. Standard 20 mesh replaceable screens optional 40, 60, 80 and 100 mesh screens (fit inside of 20 mesh). Class 600.

Standard 20 Mesh - if optional 40, 60, 80, or 100 add to end of part number:

40 Mesh = 040 to end of part number  
60 Mesh = 060 to end of part number  
80 Mesh = 080 to end of part number  
100 Mesh = 100 to end of part number

X in part # below 1 for stainless steel and 2 for carbon

Temp Max: 800 °F Pressure Max: 600 PSI

SIZE	PART NO.	STAINLESS LIST PRICE	CARBON LIST PRICE
1/4"	S2501-X-0300	\$ 285	\$ 259
3/8"	S3751-X-0300	\$ 285	\$ 259
1/2"	S5001-X-0300	\$ 285	\$ 259
3/4"	S7501-X-0300	\$ 285	\$ 259
1"	S0011-X-0300	\$ 329	\$ 329
1 1/4"	S1251-X-0300	\$ 396	\$ 358
1 1/2"	S0151-X-0300	\$ 604	\$ 439
2"	S0021-X-0300	\$ 809	\$ 468

Strainers supplied with FNPT tapped retainer cap for blow off outlet.

Strainers supplied with PTFE cap seal. Optional graphite list price cap seal adder: \$15.00 Many different types of configurations available.

**46 STRAINER** Discount Code **B**



**46 STRAINER** - Cast iron body with epoxy coating. Flanged connection ANSI 125. Plastic 2"-4" 316 Stainless steel 5"-24" strainer.

SIZE	PART NO.	WGT.	LIST PRICE
2"	5814P	4.7	\$ 193
2 1/2"	5815P	6.4	\$ 196
3"	5816P	8.8	\$ 257
4"	5817P	13	\$ 409

P: Plastic screen 2" - 4"

S: Stainless steel screen 5" - 24"

SIZE	PART NO.	WGT.	LIST PRICE
5"	5821S	16	\$ 541
6"	5822S	21	\$ 583
8"	5824S	44	\$ 875
10"	5825S	55	\$ 1,590
12"	5826S	80	\$ 1,908
14"	5827S	121	\$ 3,180
16"	5828S	166	\$ 3,832
18"	5829S	211	\$ 4,723
20"	5830S	256	\$ 5,022
24"	5832S	346	\$ 6,696

**6P STRAINER** Discount Code **A**




**6P STRAINER** - Plastic (polyethylene) with male NPT threads. Converts a check valve to a foot valve, by screwing into the valve threads.

Temp Max: 180 °F (80 °C)

STRAINER ONLY

SIZE	PART NO.	WGT.	CASE QTY.	LIST PRICE
3/4"	4300P	.1	25	\$ 7
1"	4301P	.1	25	\$ 7
1 1/4"	4302P	.2	25	\$ 8
1 1/2"	4303P	.3	10	\$ 8

**46T STRAINER** Discount Code **B**

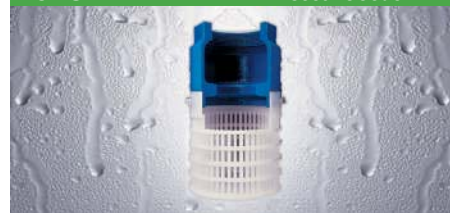

**46T STRAINER** - Cast iron body with epoxy coating. Threaded female connection. Removable polyethylene strainer. (Cutaway picture shown).

Temp Max: 180 °F (80 °C)

SIZE	PART NO.	WGT.	CASE QTY.	LIST PRICE
2"	4364	2.5	25	\$ 99
2 1/2"	4365	4	25	\$ 159
3"	4366	8.2	25	\$ 169
4"	4367	14	10	\$ 229

**Y-STRAINER** Discount Code **C**



**Y-STRAINER** - Threaded unleaded Bronze body (3/8"-2"), 125# cast iron and flanged (2 1/2"-12"), 20 mesh stainless steel strainer. Furnished with clean out plug.

Temp Max: 180 °F

Pressure Max: 200 PSI (2 1/2"-12")

Pressure Max: 400 PSI (3/8"-2")

SIZE	PART NO.	WGT.	LIST PRICE
3/8"	8711E	.5	\$ 39
1/2"	8712E	.3	\$ 41
3/4"	8713E	2	\$ 67
1"	8714E	4	\$ 83
1 1/4"	87142E	5	\$ 139
1 1/2"	87143E	6	\$ 182
2"	87144E	9	\$ 314
2 1/2"	87145	15	\$ 499
3"	87146	25	\$ 590
4"	87147	95	\$ 982
6"	87148	185	\$ 1,661
8"	87149	299	\$ 2,945
10"	87150	372	\$ 4,227
12"	87151	539	\$ 5,887

# AUTOMATIC CONTROL VALVES

## Model C, CF, & CA



Pilot operated control valves designed and built in compliance with ANSI/AWWA C530 standard.

NSF/ANSI 61 approved fusion bonded epoxy coated ductile iron globe or angle style bodies in full or reduced port configuration\*. Valves are fitted with various pilot control systems to control conditions in pressurized pipeline systems.

Available sizes from 3/8" through 36" in three different configurations. Flomatic Automatic Control Valves are AIS Compliant\*\*, Made in the USA, and are covered with a three year warranty .



\* Please consult factory for configuration and sizes.  
 \*\*Must specify AIS requirements at time of quote and order.



**YouTube**  
 Automatic Control Valves by  
 Flomatic Valves



**MODEL C**  
**FULL PORT GLOBE STYLE**  
 (Flanged or Threaded)



**MODEL CF**  
**REDUCED PORT GLOBE STYLE**  
 (Flanged)



**MODEL CA**  
**ANGLE BODY STYLE**  
 (Flanged or Threaded)

Let us help you get the project right from start.  
 Call our customer service representatives today at 800.833.2040 to assist you in selecting the control valve that is best for your application.

### SEVERAL SERIES AVAILABLE

- ▶ Pressure Reducing Valve
- ▶ Modulating Altitude Valve
- ▶ Non-Modulating Altitude Valve
- ▶ Back Pressure Sustaining Valve
- ▶ Pressure Relief Valve
- ▶ Surge Arrestor Valve
- ▶ Pump Control Valve
- ▶ Pilot Operated Float Valve
- ▶ Solenoid Control Valve
- ▶ Flow Control
- ▶ Hydraulic Check Valve
- ▶ And more...

### STANDARD FEATURES...

- ▶ Complies with AWWA C530
- ▶ Fusion bonded epoxy coated Ductile Iron Body. Inside and Outside. Flo-Coat®
- ▶ Copper tubing (SS optional)
- ▶ Control tubing isolation valves
- ▶ Gauge cocks and air bleeder valve
- ▶ Valve Trim - Stainless Steel Standard - Optional Unleaded Bronze
- ▶ Body drain plugs
- ▶ EZ off Jack screw covers & seat rings
- ▶ Unleaded Pilots
- ▶ Air Bleed Standard

### POPULAR OPTIONS...

- ▶ Dual power chamber
- ▶ Built-In check feature
- ▶ Stainless Steel Pilots
- ▶ Electronic controls
- ▶ Position indicator (standard 6" and up)





**C101 THREADED/CF101/C101/CA101**

Discount Code **B**



**PRESSURE REDUCING VALVE WITH CHECK** - Reduces high upstream pressure to lower downstream pressure. Part numbers below are for standard C101 valve set at 25 - 125 PSI. Consult factory for other options.

SIZE	C/CA THREADED	LIST PRICE	CF FLANGED* 150#	LIST PRICE	SIZE	C/CA C FLANGED 150#	LIST PRICE	C/CA C FLANGED 300#	LIST PRICE
1 1/4"	C101B0B00130	\$1,635			1 1/4"	C101B1B00130	\$ 1,747	C101C2B00130	\$ 2,030
1 1/2"	C101C0B00130	\$1,665			1 1/2"	C101C1B00130	\$ 1,781	C101C2B00130	\$ 2,072
2"	C101D0B00130	\$1,676			2"	C101D1B00130	\$ 2,113	C101D2B00130	\$ 2,231
2 1/2"	C101E0B00130	\$2,089			2 1/2"	C101E1B00130	\$ 2,217	C101E2B00130	\$ 2,538
3"	C101F0B00130	\$2,237			3"	C101F1B00130	\$ 2,268	C101F2B00130	\$ 2,589
4"			CF101G1B00130	\$2,321	4"	C101G1B00130	\$ 2,916	C101G2B00130	\$ 3,179
6"			CF101J1B00130	\$3,520	6"	C101J1B00130	\$ 4,605	C101J2B00130	\$ 5,030
8"			CF101K1B00130	\$5,704	8"	C101K1B00130	\$ 7,723	C101K2B00130	\$ 8,500
10"			CF101L1B00130	\$8,361	10"	C101L1B00130	\$ 10,861	C101L2B00130	\$ 11,884
12"			CF101M1B00130	\$13,504	12"	C101M1B00130	\$ 16,864	C101M2B00130	\$ 18,131
14"			CF101N1B00130	POA	14"	C101N1B00130	POA	C101N2B00130	POA
16"			CF101O1B00130	POA	16"	C101O1B00130	POA	C101O2B00130	POA
18"			CF101P1B00130	POA	18"	C101P1B00130	POA	C101P2B00130	POA
20"			CF101Q1B00130	POA	20"	C101Q1B00130	POA	C101Q2B00130	POA

**C103/CA103**

Discount Code **B**



**PRESSURE REDUCING VALVE WITH CHECK** - Reduces high upstream pressure to lower downstream pressure. Check feature prevents reverse flow in the event of pressure reversal.

SIZE	THREADED	CF FLANGED* 150#	C/CA C FLANGED 150#	C/CA C FLANGED 300#
1 1/4"	\$ 1,980		\$ 2,090	\$ 2,352
1 1/2"	\$ 2,008		\$ 2,126	\$ 2,400
2"	\$ 2,020		\$ 2,462	\$ 2,559
2 1/2"	\$ 2,436		\$ 2,566	\$ 2,866
3"	\$ 2,587		\$ 2,618	\$ 2,917
4"		\$ 2,500	\$ 3,272	\$ 3,507
6"		\$ 3,702	\$ 4,977	\$ 5,358
8"		\$ 5,976	\$ 8,304	\$ 9,006
10"		\$ 8,531	\$ 11,042	\$ 12,036
12"		\$ 13,476	\$ 17,175	\$ 18,259
14"		POA	POA	POA
16"		POA	POA	POA
18"		POA	POA	POA
20"		POA	POA	POA

Let us help you get the project right from start.  
Call our customer service representatives today at 800.833.2040 to assist you in selecting the control valve that is best for your application.

**LARGER SIZES IN STOCK - 16", 20", 24", 30", 36"**

**C201/CA201**

Discount Code **B**



**MODULATING ALTITUDE VALVE** - Single acting level control with modulation for final filling of storage tanks.

SIZE	THREADED	CF FLANGED* 150#	C/CA C FLANGED 150#	C/CA C FLANGED 300#
1 1/4"	\$ 4,082		\$ 4,332	\$ 4,606
1 1/2"	\$ 4,166		\$ 4,700	\$ 5,028
2"	\$ 4,590		\$ 5,203	\$ 5,506
2 1/2"	\$ 4,971		\$ 5,266	\$ 5,567
3"	\$ 5,391		\$ 6,164	\$ 6,593
4"		\$ 6,531	\$ 7,627	\$ 8,162
6"		\$ 8,352	\$ 10,442	\$ 11,175
8"		\$ 11,284	\$ 11,521	\$ 12,326
10"		\$ 14,713	\$ 17,515	\$ 18,741
12"		\$ 17,123	\$ 17,660	\$ 18,765
14"		POA	POA	POA
16"		POA	POA	POA
18"		POA	POA	POA
20"		POA	POA	POA

**C205/CA205**

Discount Code **B**



**NON-MODULATING ALTITUDE VALVE** - Single acting level control of storage tanks, reservoirs, and basins.

SIZE	THREADED	CF FLANGED* 150#	C/CA C FLANGED 150#	C/CA C FLANGED 300#
1 1/4"	\$ 4,179		\$ 4,482	\$ 4,659
1 1/2"	\$ 4,264		\$ 4,573	\$ 4,754
2"	\$ 4,701		\$ 4,813	\$ 5,005
2 1/2"	\$ 5,091		\$ 5,329	\$ 5,540
3"	\$ 5,521		\$ 5,395	\$ 5,608
4"		\$ 5,945	\$ 6,310	\$ 6,556
6"		\$ 6,688	\$ 7,812	\$ 8,119
8"		\$ 8,553	\$ 11,230	\$ 11,672
10"		\$ 11,556	\$ 11,799	\$ 12,265
12"		\$ 17,534	\$ 18,141	\$ 18,650
14"		POA	POA	POA
16"		POA	POA	POA
18"		POA	POA	POA
20"		POA	POA	POA

**C301/CA301**

Discount Code **B**



**BACK PRESSURE SUSTAINING VALVE** - Sustains a minimum upstream pressure to prevent over-drafting the supply.

SIZE	THREADED	CF FLANGED* 150#	C/CA C FLANGED 150#	C/CA C FLANGED 300#
1 1/4"	\$ 1,731		\$ 2,008	\$ 2,071
1 1/2"	\$ 1,741		\$ 2,049	\$ 2,113
2"	\$ 1,782		\$ 2,086	\$ 2,184
2 1/2"	\$ 2,215		\$ 2,370	\$ 2,529
3"	\$ 2,289		\$ 2,559	\$ 2,677
4"		\$ 2,737	\$ 3,456	\$ 3,685
6"		\$ 3,809	\$ 5,084	\$ 5,461
8"		\$ 5,985	\$ 8,315	\$ 9,012
10"		\$ 8,805	\$ 11,254	\$ 12,251
12"		\$ 14,695	\$ 16,972	\$ 17,663
14"		POA	POA	POA
16"		POA	POA	POA
18"		POA	POA	POA
20"		POA	POA	POA



**AIS Compliant - Made in the USA**

Flomatic® offers domestically manufactured valve products that meet the requirements under EPA State Revolving Fund (SRF) for projects in compliance with the American Iron and Steel Act (AIS). Must be specified at time of quote and order.

\* Reduced port configuration.

**C401/CA401** Discount Code **B**



**PRESSURE RELIEF VALVE** - Protects against excessive pressure.

SIZE	THREADED	CF FLANGED* 150#	C/CA C FLANGED 150#	C/CA C FLANGED 300#
1 1/4"		\$ 1,714	\$ 1,989	\$ 2,051
1 1/2"		\$ 1,725	\$ 2,029	\$ 2,093
2"		\$ 1,765	\$ 2,066	\$ 2,163
2 1/2"		\$ 2,194	\$ 2,347	\$ 2,505
3"		\$ 2,267	\$ 2,535	\$ 2,652
4"		\$ 2,711	\$ 3,423	\$ 3,650
6"		\$ 3,772	\$ 5,035	\$ 5,409
8"		\$ 5,928	\$ 8,236	\$ 8,926
10"		\$ 8,721	\$11,254	\$11,797
12"		\$14,556	\$16,810	\$17,495
14"		POA	POA	POA
16"		POA	POA	POA
18"		POA	POA	POA
20"		POA	POA	POA

**C501/CA501** Discount Code **B**



**SURGE ARRESTOR VALVE** - Provides relief protection against pressure surges during pump start up, shut down, or power failure.

SIZE	THREADED	CF FLANGED* 150#	C/CA C FLANGED 150#	C/CA C FLANGED 300#
1 1/4"		\$ 4,211	\$ 5,000	\$ 5,283
1 1/2"		\$ 4,297	\$ 5,102	\$ 5,391
2"		\$ 4,891	\$ 5,370	\$ 5,674
2 1/2"		\$ 5,355	\$ 5,695	\$ 5,991
3"		\$ 5,412	\$ 5,713	\$ 6,012
4"		\$ 5,878	\$ 6,087	\$ 6,305
6"		\$ 6,696	\$ 7,507	\$ 7,861
8"		\$ 8,652	\$10,488	\$11,144
10"		\$11,530	\$13,999	\$14,391
12"		\$17,941	\$19,822	\$20,507
14"		POA	POA	POA
16"		POA	POA	POA
18"		POA	POA	POA
20"		POA	POA	POA

# 10 Reasons to Select Flomatic Automatic Control Valves

Complies with ANSI/AWWA C530

- 1 NSF/ANSI 61\*
- 2 Isolation Valves Standard
- 3 Drain Plug Standard
- 4 Test Cocks Standard
- 5 All SS-Fasteners Standard
- 6 Jack Screws Standard
- 7 Indicator Rod Standard 6" and up
- 8 Air Bleed Valve Standard
- 9 Low Head loss
- 10 100% Hydro Tested

\* 1 1/4" - 12" Consult factory for configuration

Let us help you get the project right from start. Call our customer service representatives today at 800.833.2040 to assist you in selecting the control valve that is best for your application.

**C611/CA611** Discount Code **B**



**BOOSTER PUMP CONTROL VALVE** - Eliminates pump station pressure surges during start up and shut down. Equipped with internal drop check feature.

SIZE	CF FLANGED* 150#	C/CA C FLANGED 150#	C/CA C FLANGED 300#
3"		\$ 7,472	\$ 7,998
4"		\$ 7,872	\$ 8,029
6"		\$ 9,332	\$10,082
8"		\$11,587	\$13,815
10"		\$17,684	\$20,906
12"		\$24,908	\$29,909
14"		POA	POA
16"		POA	POA
18"		POA	POA
20"		POA	POA

**C621/CA621** Discount Code **B**



**DEEP WELL PUMP CONTROL VALVE** - Eliminates pump station pressure surges during start up and shut down.

SIZE	CF FLANGED* 150#	C/CA C FLANGED 150#	C/CA C FLANGED 300#
3"		\$ 6,442	\$ 6,968
4"		\$ 6,823	\$ 6,998
6"		\$ 8,213	\$ 9,003
8"		\$10,127	\$12,383
10"		\$16,216	\$19,436
12"		\$23,463	\$25,677
14"		POA	POA
16"		POA	POA
18"		POA	POA
20"		POA	POA

**C701/CA701** Discount Code **B**



**PILOT OPERATED FLOAT VALVE** - For level control of storage tanks, reservoirs, or basins.

SIZE	THREADED	CF FLANGED* 150#	C/CA C FLANGED 150#	C/CA C FLANGED 300#
1 1/4"		\$ 2,012	\$ 2,127	\$ 2,376
1 1/2"		\$ 2,012	\$ 2,170	\$ 2,424
2"		\$ 2,047	\$ 2,481	\$ 2,573
2 1/2"		\$ 2,445	\$ 2,578	\$ 2,754
3"		\$ 2,488	\$ 2,626	\$ 2,850
4"		\$ 2,684	\$ 3,404	\$ 3,622
6"		\$ 3,812	\$ 4,810	\$ 5,161
8"		\$ 5,849	\$ 7,721	\$ 8,373
10"		\$ 8,328	\$10,273	\$11,176
12"		\$13,890	\$16,584	\$17,262
14"		POA	POA	POA
16"		POA	POA	POA
18"		POA	POA	POA
20"		POA	POA	POA



## AIS Compliant - Made in the USA

Flomatic® offers domestically manufactured valve products that meet the requirements under EPA State Revolving Fund (SRF) for projects in compliance with the American Iron and Steel Act (AIS). Must be specified at time of quote and order.

\* Reduced port configuration.



**C705/CA705** Discount Code **B**



**NON-MODULATING PILOT OPERATED FLOAT VALVE** - For level control of storage tanks, reservoirs, or basins.

SIZE	THREADED	CF FLANGED* 150#	C/CA C FLANGED 150#	C/CA C FLANGED 300#
1 1/4"		\$ 2,537	\$ 2,800	\$ 3,053
1 1/2"		\$ 2,589	\$ 2,857	\$ 3,115
2"		\$ 2,702	\$ 3,175	\$ 3,266
2 1/2"		\$ 2,727	\$ 3,274	\$ 3,452
3"		\$ 3,011	\$ 3,322	\$ 3,550
4"		\$ 3,629	\$ 4,088	\$ 4,328
6"		\$ 4,544	\$ 5,549	\$ 5,906
8"		\$ 6,619	\$ 8,516	\$ 9,180
10"		\$ 9,146	\$ 11,087	\$ 12,006
12"		\$ 14,817	\$ 17,520	\$ 18,212
14"		POA	POA	POA
16"		POA	POA	POA
18"		POA	POA	POA
20"		POA	POA	POA

**C801/CA801** Discount Code **B**



**SOLENOID CONTROL VALVE** - Remote actuation for valve position. 801 Energize to open valve, 802 Energize to close valve.

SIZE	THREADED	CF FLANGED* 150#	C/CA C FLANGED 150#	C/CA C FLANGED 300#
1 1/4"		\$ 2,022	\$ 2,137	\$ 2,387
1 1/2"		\$ 2,022	\$ 2,181	\$ 2,436
2"		\$ 2,057	\$ 2,493	\$ 2,585
2 1/2"		\$ 2,457	\$ 2,591	\$ 2,767
3"		\$ 2,479	\$ 2,639	\$ 2,864
4"		\$ 2,697	\$ 3,421	\$ 3,639
6"		\$ 3,831	\$ 4,833	\$ 5,186
8"		\$ 5,878	\$ 7,759	\$ 8,413
10"		\$ 8,369	\$ 10,772	\$ 11,230
12"		\$ 13,957	\$ 16,664	\$ 17,346
14"		POA	POA	POA
16"		POA	POA	POA
18"		POA	POA	POA
20"		POA	POA	POA

**C901/CA901** Discount Code **B**



**FLOW CONTROL VALVE** - Maintains a pre-set maximum flow rate regardless of changing line pressures.

SIZE	CF FLANGED* 150#	C/CA C FLANGED 150#	C/CA C FLANGED 300#
2"		\$ 2,645	\$ 2,714
2 1/2"		\$ 3,821	\$ 4,077
3"		\$ 3,948	\$ 4,097
4"	\$ 3,487	\$ 4,714	\$ 4,936
6"	\$ 5,140	\$ 6,300	\$ 6,659
8"	\$ 7,406	\$ 9,505	\$ 10,168
10"	\$ 9,647	\$ 12,835	\$ 13,401
12"	\$ 15,327	\$ 18,346	\$ 19,038
14"	POA	POA	POA
16"	POA	POA	POA
18"	POA	POA	POA
20"	POA	POA	POA

**C1001/CA1001** Discount Code **B**



**HYDRAULIC CHECK VALVE** - Closes to prevent flow reversal. Adjustable opening & closing speed controls.

SIZE	THREADED	CF FLANGED* 150#	C/CA C FLANGED 150#	C/CA C FLANGED 300#
1 1/4"		\$ 1,433	\$ 1,515	\$ 1,764
1 1/2"		\$ 1,463	\$ 1,546	\$ 1,800
2"		\$ 1,551	\$ 1,858	\$ 1,949
2 1/2"		\$ 1,880	\$ 2,009	\$ 2,282
3"		\$ 1,994	\$ 2,117	\$ 2,389
4"		\$ 2,191	\$ 2,759	\$ 2,976
6"		\$ 3,404	\$ 4,198	\$ 4,550
8"		\$ 5,595	\$ 7,532	\$ 8,187
10"		\$ 8,260	\$ 10,093	\$ 10,624
12"		\$ 14,241	\$ 16,245	\$ 16,927
14"		POA	POA	POA
16"		POA	POA	POA
18"		POA	POA	POA
20"		POA	POA	POA

**C000 MINI** Discount Code **B**



**HYDRAULIC CONTROL VALVE** - Water or Air operated.

Temp Max: 180 °F (80 °C) Pressure Max: 400 PSI

SIZE	MODEL NO.	WGT	LIST PRICE
3/8"	C000AAA	2	\$ 215
1/2"	C000AA	2	\$ 243
3/4"	C000AA	3	\$ 259
1"	C000A	5	\$ 265
1 1/4"	C000B	5	\$ 286

**316 BALL VALVE** Discount Code **B**



**316SS BALL VALVE** - Full Port, FNPT connection, drilled and tapped for 2 bolt mounting pad, SS locking handle.

Temp Max: 400 ° F (204 ° C) Pressure Max: 1000 PSI

SIZE	PART NUMBER	LIST PRICE
1/4"	SSBV1000-02	\$ 41
3/8"	SSBV1000-03	\$ 41
1/2"	SSBV1000-05	\$ 44
3/4"	SSBV1000-07	\$ 58
1"	SSBV1000-10	\$ 98
1 1/4"	SSBV1000-12	\$ 147
1 1/2"	SSBV1000-15	\$ 194
2"	SSBV1000-20	\$ 246
2 1/2"	SSBV1000-25	\$ 533
3"	SSBV1000-30	\$ 878

**PRESSURE GAUGES** Discount Code **B**



**PRESSURE GAUGES** - 2.5 inch dial, 1/4" NPT bottom connection, unleaded. 1.5% accuracy Full Scale. 304SS case liquid glycerin filled bronze tube & connection.

RANGE	PART NUMBER	LIST PRICE
0-100 PSI	2-PG25-100G	\$ 25
0-200 PSI	2-PG25-200G	\$ 25
0-300 PSI	2-PG25-300G	\$ 25
0-400 PSI	2-PG25-400G	\$ 25

\* Reduced port configuration.

**PRP** Discount Code **B**



**PRP - 3/8" Pressure Reducing Pilot in Unleaded Bronze or 316 Stainless Steel\*** - Pilot control valve that automatically reduces a higher inlet pressure to a lower outlet pressure. It is a direct acting, spring-loaded, diaphragm valve that operates hydraulically and is designed to maintain a pre-set outlet pressure. Senses downstream pressure directly.

Temp Max: 180°F (80°C) Pressure Max: 400 PSI

PART NO.	SPRING RANGE	LIST PRICE	LIST PRICE STAINLESS
152100A	5 - 80 PSI	\$ 331	\$ 513
152100B	25 - 125 PSI	\$ 331	\$ 513
152100C	2 - 35 PSI	\$ 331	\$ 513
152100D	30 - 300 PSI	\$ 331	\$ 513

\* For stainless steel, put "S" before letter & after part number.

**BPP** Discount Code **B**



**BPP - 3/8" Back Pressure Sustaining Pilot**  
Pilot control valve that automatically maintains a minimum inlet pressure. It is a direct acting, spring-loaded, diaphragm valve that operates hydraulically and is designed to maintain a pre-set inlet pressure. Can also be used as a pressure relief valve/pilot control.

Temp Max: 180°F (80°C) Pressure Max: 400 PSI

PART NO.	SPRING RANGE	LIST PRICE
160100SA	5 - 80 PSI	\$ 592
160100SB	25 - 125 PSI	\$ 592
160100SC	2 - 35 PSI	\$ 592
160100SD	30 - 300 PSI	\$ 592

**PRR** Discount Code **B**




**PRR - 3/8" Pressure Reducing Pilot (Remote)**  
All 316 Stainless Steel pilot control valve that automatically reduces a higher inlet pressure to a lower outlet pressure. It is a direct acting, spring-loaded, diaphragm valve that operates hydraulically and is designed to maintain a pre-set outlet pressure. Senses downstream pressure remotely.

Temp Max: 180°F (80°C) Pressure Max: 400 PSI

PART NO.	SPRING RANGE	LIST PRICE
152100SA	5 - 80 PSI	\$ 592
152100SB	25 - 125 PSI	\$ 592
152100SC	2 - 35 PSI	\$ 592
152100SD	30 - 300 PSI	\$ 592

**TEST COCKS** Discount Code **B**

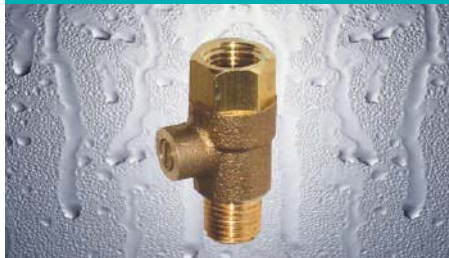

**TEST COCKS** - Unleaded Bronze test cocks, full port standard.

SIZE	PART NO.	CASE QTY.	LIST PRICE
1/4" x 1/4"	9383397E	4	\$ 12
3/8" x 1/4"	9383395E	4	\$ 12

**Y STRAINER** Discount Code **B**



**Y STRAINER** - Unleaded Bronze body, 20 mesh stainless steel strainer. Furnished with clean out plug.

SIZE	PART NO.	LIST PRICE
3/8" Inlet x 1/4" Outlet	8710E	\$ 30

See page 20 for other sizes.


**MINI BALL VALVE** Discount Code **B**



**MINI BALL VALVE** - Mini ball valves are a quarter turn full ported on off isolation valves used on external control valve pilot controls.

SIZE	PART NO.	LIST PRICE
3/8"	149B5369	\$ 14

**ACP MODEL 165** Discount Code **B**

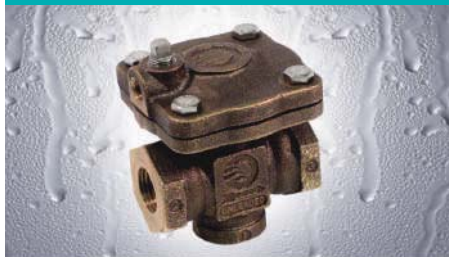

**ACP - Accelerator Pilot in Unleaded Bronze**  
It is used in systems to control flow by applying an independent pressure to the diaphragm. Enables automatic control valves to rapidly vent water from control diaphragm, thus allowing quicker main valve opening.

Temp Max: 180°F (80°C) Pressure Max: 300 PSI

SIZE	PART NO.	LIST PRICE
1/2"	165200	\$ 911

**CV80S6** Discount Code **B**



**CV80S6 CHECK VALVE** - All 316SS body with Delrin poppet and Buna-N seal. Threaded female x female connection.

Temp Max: 180°F (80°C) Pressure Max: 400 PSI

SIZE	PART NO.	WGT.	LIST PRICE
1/4"	5158	.43	\$ 124
3/8"	5159	.45	\$ 135
1/2"	4029	.59	\$ 180


**FC4** Discount Code **B**



**FLOW CONTROL** - 3/8" Adjustable restrictor for use as an opening or closing speed controller.

SIZE	PART NO.	LIST PRICE
3/8"	FC4	\$ 305



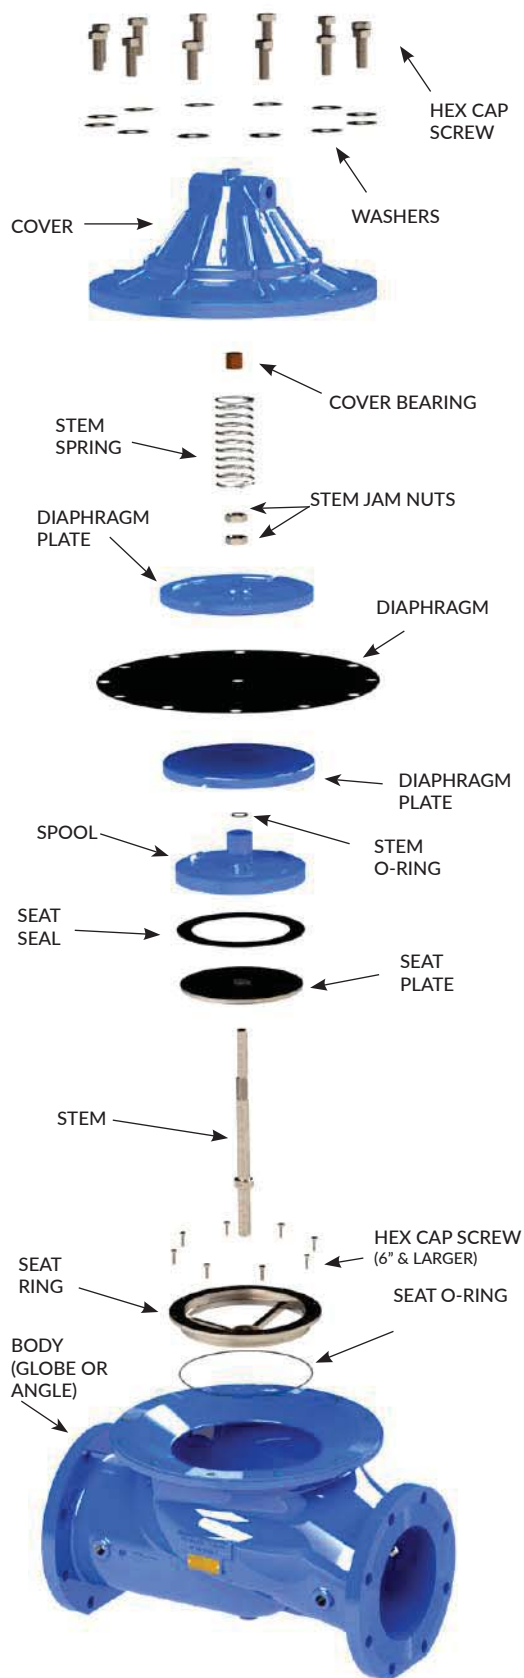

**C = FULL PORT CF = REDUCED PORT**

**BODY SOFT SEAL BUNA/VITON KITS**  
 (Includes: "O" - Rings, Diaphragm, and Seat Seal)  
 Consult Factory for Larger 12" size thru 36" sizes

Discount Code **B**

PART NO.	DESCRIPTION	LIST PRICE
CRK201	CV repair kit, BUNA, C 1 1/2"	\$ 52
CRK202	CV repair kit, BUNA, C 2", CF 3"	\$ 56
CRK203	CV repair kit, BUNA, C 2 1/2" & 3", CF 4"	\$ 74
CRK204	CV repair kit, BUNA, C 4", CF 6"	\$ 109
CRK206	CV repair kit, BUNA, C 6", CF 8"	\$ 146
CRK208	CV repair kit, BUNA, C 8", CF 10"	\$ 216
CRK210	CV repair kit, BUNA, C 10", CF 12"	\$ 418
CRK212	CV repair kit, BUNA, C 12", CF 14"	\$ 572
CRV015	CV repair kit, Viton, C 1 1/2"	\$ 97
CRV003	CV repair kit, Viton, C 3", CF 4"	\$ 181
CRV004	CV repair kit, Viton, C 4", CF 6"	\$ 332
CRV006	CV repair kit, Viton, C 6", CF 8"	\$ 553

**PILOT REPAIR KITS**

Discount Code **B**

PART NO.	DESCRIPTION	LIST PRICE
CRKALT	Altitude pilot repair kit, BUNA (must specify spring range)	\$ 546
152100KIT	PRP repair kit, BUNA, bronze	\$ 34
152100VKIT	PRP repair kit, Viton, bronze	\$ 98
152100SKIT	PRP repair kit, BUNA, SS	\$ 36
152100SVKIT	PRP repair kit, Viton, SS	\$ 99
160100KIT	BPP repair kit, BUNA, Bronze or SS	\$ 121
160100VKIT	BPP repair kit, Viton, Bronze or SS	\$ 134

**FACTORY ASSEMBLED SPOOL ASSEMBLIES**  
 (Includes: Stem, seat plate, seat seal, stem "O"-Ring, Spool, Upper & Lower Diaphragm plate, Diaphragm and Stem Jam Nuts)

Discount Code **B**

PART #	DESCRIPTION	LIST PRICE
SPOOLKIT03	Spool replacement kit C 1 1/4" & 1 1/2"	\$ 295
SPOOLKIT04	Spool replacement kit C 2", CF 3"	\$ 237
SPOOLKIT06	Spool replacement kit C 2 1/2", CF 3" & 4"	\$ 402
SPOOLKIT07	Spool replacement kit C 4", CF 6"	\$ 569
SPOOLKIT09	Spool replacement kit C 6", CF 8"	\$ 1,096
SPOOLKIT10	Spool replacement kit C 8", CF 10"	\$ 1,727
SPOOLKIT11	Spool replacement kit C 10", CF 12"	\$ 2,969
SPOOLKIT12	Spool replacement kit C 12"	\$ 4,357

**NOTE: PLEASE SPECIFY CONTROL VALVE S/N WHEN ORDERING REPAIR KITS**

Call our customer service representatives at 800.833.2040 to request our Control Valve Price List and Literature.

# FLO-TROL® Flow Control Valves

## MODEL CD900

### Constant Flow Control Valve

- Constant Flow Rates
- Booster Pump Systems
- Domestic Water Systems
- Sizes 3/8" thru 2" (.25 - 30 GPM\*)
- NSF/ANSI 61 and 372 Certified
- Stainless Steel Construction
- Laser engraved flow rate and size



Flo-Trol® automatic flow control valves are designed to give constant flow over a wide pressure range. The internal controlling mechanism has no moving part, consisting only of a flexible orifice that varies with applied pressure maintaining a constant flow rate.

Flow rates are maintained to within ±15% between 15 and 125 PSI (1 to 8.6 bar). The flow rate varies due to manufacturing tolerances and water temperatures. Valve bodies are stainless steel (not chrome or nickel-plated brass) with a Buna-N orifice (NSF/ANSI 61 certified).

Temp Max: 180 °F Pressure Max: 200 PSI Discount Code **A**

FloTrol Part Number	Similar to Dole® Cross Reference	Flo-Trol® Model Description	FLOMATIC List Price
<b>3/8" Model CDA</b>			
CDA.25	GA.25	3/8"F X 3/8"F 0.25 GPM	\$ 23.50
CDA.50	GA.50	3/8"F X 3/8"F 0.5 GPM	\$ 23.50
CDA.75	GA.75	3/8"F X 3/8"F 0.75 GPM	\$ 23.50
CDA1.0	GA1.0	3/8"F X 3/8"F 1 GPM	\$ 23.50
<b>1/2" Model CDB</b>			
CDB1.0	GB1.0	1/2"F X 1/2"F 1 GPM	\$ 29.00
CDB1.5	GB1.5	1/2"F X 1/2"F 1.5 GPM	\$ 29.00
CDB2.0	GB2.0	1/2"F X 1/2"F 2 GPM	\$ 29.00
CDB2.5	GB2.5	1/2"F X 1/2"F 2.5 GPM	\$ 29.00
CDB3.0	GB3.0	1/2"F X 1/2"F 3 GPM	\$ 29.00
CDB3.5	GB3.5	1/2"F X 1/2"F 3.5 GPM	\$ 29.00
CDB4.0	GB4.0	1/2"F X 1/2"F 4 GPM	\$ 29.00
CDB4.5	GB4.5	1/2"F X 1/2"F 4.5 GPM	\$ 29.00
CDB5.0	GB5.0	1/2"F X 1/2"F 5 GPM	\$ 29.00
CDB6.0	GB6.0	1/2"F X 1/2"F 6 GPM	\$ 29.00
<b>3/4" Model CDC</b>			
CDC1.0	GC1.0	3/4"F X 3/4"F 1 GPM	\$ 57.00
CDC1.5	GC1.5	3/4"F X 3/4"F 1.5 GPM	\$ 57.00
CDC2.0	GC2.0	3/4"F X 3/4"F 2 GPM	\$ 57.00
CDC2.5	GC2.5	3/4"F X 3/4"F 2.5 GPM	\$ 57.00
CDC3.0	GC3.0	3/4"F X 3/4"F 3 GPM	\$ 57.00
CDC3.5	GC3.5	3/4"F X 3/4"F 3.5 GPM	\$ 57.00
CDC4.0	GC4.0	3/4"F X 3/4"F 4 GPM	\$ 57.00
CDC4.5	GC4.5	3/4"F X 3/4"F 4.5 GPM	\$ 57.00
CDC5.0	GC5.0	3/4"F X 3/4"F 5 GPM	\$ 57.00
CDC6.0	GC6.0	3/4"F X 3/4"F 6 GPM	\$ 57.00
CDC7.0	GC7.0	3/4"F X 3/4"F 7 GPM	\$ 57.00
CDC8.0	GC8.0	3/4"F X 3/4"F 8 GPM	\$ 57.00
CDC9.0	GC9.0	3/4"F X 3/4"F 9 GPM	\$ 57.00
CDC10	GC10	3/4"F X 3/4"F 10 GPM	\$ 57.00
CDC11.5	GC11.5	3/4"F X 3/4"F 11.5 GPM	\$ 57.00
<b>1" Model CDY</b>			
CDY1.0	GY1.0	1" X 1" 1 GPM	\$ 57.00
CDY1.5	GY1.5	1" X 1" 1.5 GPM	\$ 57.00
CDY2.0	GY2.0	1" X 1" 2 GPM	\$ 57.00
CDY2.5	GY2.5	1" X 1" 2.5 GPM	\$ 57.00
CDY3.0	GY3.0	1" X 1" 3 GPM	\$ 57.00
CDY3.5	GY3.5	1" X 1" 3.5 GPM	\$ 57.00
CDY4.0	GY4.0	1" X 1" 4 GPM	\$ 57.00
CDY4.5	GY4.5	1" X 1" 4.5 GPM	\$ 57.00
CDY5.0	GY5.0	1" X 1" 5 GPM	\$ 57.00
CDY6.0	GY6.0	1" X 1" 6 GPM	\$ 57.00
CDY7.0	GY7.0	1" X 1" 7 GPM	\$ 57.00
CDY8.0	GY8.0	1" X 1" 8 GPM	\$ 57.00
CDY9.0	GY9.0	1" X 1" 9 GPM	\$ 57.00
CDY10	GY10	1" X 1" 10 GPM	\$ 57.00
CDY11.5	GY11.5	1" X 1" 11.5 GPM	\$ 57.00

Temp Max: 180 °F Pressure Max: 200 PSI Discount Code **A**


FloTrol Part Number	Similar to Dole® Cross Reference	Flo-Trol® Model Description	FLOMATIC List Price
<b>1" Model CDX</b>			
CDX1.0	GX1.0	1" F X 1" F 1 GPM	\$ 72.00
CDX1.5	GX1.5	1" F X 1" F 1.5 GPM	\$ 72.00
CDX2.0	GX2.0	1" F X 1" F 2 GPM	\$ 72.00
CDX2.5	GX2.5	1" F X 1" F 2.5 GPM	\$ 72.00
CDX3.0	GX3.0	1" F X 1" F 3 GPM	\$ 72.00
CDX3.5	GX3.5	1" F X 1" F 3.5 GPM	\$ 72.00
CDX4.0	GX4.0	1" F X 1" F 4 GPM	\$ 72.00
CDX4.5	GX4.5	1" F X 1" F 4.5 GPM	\$ 72.00
CDX5.0	GX5.0	1" F X 1" F 5 GPM	\$ 72.00
CDX6.0	GX6.0	1" F X 1" F 6 GPM	\$ 72.00
CDX7.0	GX7.0	1" F X 1" F 7 GPM	\$ 72.00
CDX8.0	GX8.0	1" F X 1" F 8 GPM	\$ 72.00
CDX9.0	GX9.0	1" F X 1" F 9 GPM	\$ 72.00
CDX10	GX10	1" F X 1" F 10 GPM	\$ 72.00
CDX12	GX12	1" F X 1" F 12 GPM	\$ 72.00
CDX15	GX15	1" F X 1" F 15 GPM	\$ 72.00
CDX17	GX17	1" F X 1" F 17 GPM	\$ 72.00
CDX20	GX20	1" F X 1" F 20 GPM	\$ 72.00
CDX25	GX25	1" F X 1" F 25 GPM	\$ 72.00
CDX30	GX30	1" F X 1" F 30 GPM	\$ 72.00
<b>1 1/4" Model CDP</b>			
CDP1.0	GP1.0	1 1/4" M X 1 1/4" M 1 GPM	\$ 105.00
CDP1.5	GP1.5	1 1/4" M X 1 1/4" M 1.5 GPM	\$ 105.00
CDP2.0	GP2.0	1 1/4" M X 1 1/4" M 2 GPM	\$ 105.00
CDP2.5	GP2.5	1 1/4" M X 1 1/4" M 2.5 GPM	\$ 105.00
CDP3.0	GP3.0	1 1/4" M X 1 1/4" M 3 GPM	\$ 105.00
CDP3.5	GP3.5	1 1/4" M X 1 1/4" M 3.5 GPM	\$ 105.00
CDP4.0	GP4.0	1 1/4" M X 1 1/4" M 4 GPM	\$ 105.00
CDP4.5	GP4.5	1 1/4" M X 1 1/4" M 4.5 GPM	\$ 105.00
CDP5.0	GP5.0	1 1/4" M X 1 1/4" M 5 GPM	\$ 105.00
CDP6.0	GP6.0	1 1/4" M X 1 1/4" M 6 GPM	\$ 105.00
CDP7.0	GP7.0	1 1/4" M X 1 1/4" M 7.0 GPM	\$ 105.00
CDP8.0	GP8.0	1 1/4" M X 1 1/4" M 8 GPM	\$ 105.00
CDP9.0	GP9.0	1 1/4" M X 1 1/4" M 9 GPM	\$ 105.00
CDP10	GP10	1 1/4" M X 1 1/4" M 10 GPM	\$ 105.00
CDP12	GP12	1 1/4" M X 1 1/4" M 12 GPM	\$ 105.00
CDP15	GP15	1 1/4" M X 1 1/4" M 15 GPM	\$ 105.00
CDP17	GP17	1 1/4" M X 1 1/4" M 17 GPM	\$ 105.00
CDP20	GP20	1 1/4" M X 1 1/4" M 20 GPM	\$ 105.00
CDP25	GP25	1 1/4" M X 1 1/4" M 25 GPM	\$ 105.00
CDP30	GP30	1 1/4" M X 1 1/4" M 30 GPM	\$ 105.00
<b>1 1/2" Model CDT</b>			
CDT9.0	GT9.0	1 1/2" M X 1 1/2" M 9.0 GPM	\$ 129.00
CDT10	GT10	1 1/2" M X 1 1/2" M 10 GPM	\$ 129.00
CDT12	GT12	1 1/2" M X 1 1/2" M 12 GPM	\$ 129.00
CDT15	GT15	1 1/2" M X 1 1/2" M 15 GPM	\$ 129.00
CDT17	GT17	1 1/2" M X 1 1/2" M 17 GPM	\$ 129.00
CDT20	GT20	1 1/2" M X 1 1/2" M 20 GPM	\$ 129.00
CDT25	GT25	1 1/2" M X 1 1/2" M 25 GPM	\$ 129.00
CDT30	GT30	1 1/2" M X 1 1/2" M 30 GPM	\$ 129.00
<b>NEW SIZES 2" Model CDF</b>			
CDF9.0	GF9.0	2" M X 2" M 9.0 GPM	\$ 220.00
CDF10	GF10	2" M X 2" M 10 GPM	\$ 220.00
CDF12	GF12	2" M X 2" M 12 GPM	\$ 220.00
CDF15	GF15	2" M X 2" M 15 GPM	\$ 220.00
CDF17	GF17	2" M X 2" M 17 GPM	\$ 220.00
CDF20	GF20	2" M X 2" M 20 GPM	\$ 220.00
CDF25	GF25	2" M X 2" M 25 GPM	\$ 220.00
CDF30	GF30	2" M X 2" M 30 GPM	\$ 220.00

NOTE: "Dole®" is a registered trademark of Siebe, Inc. of Foxboro, Massachusetts

\* Consult factory for other sizes, flows, and GPM.



**C150EHF** Discount Code **A**

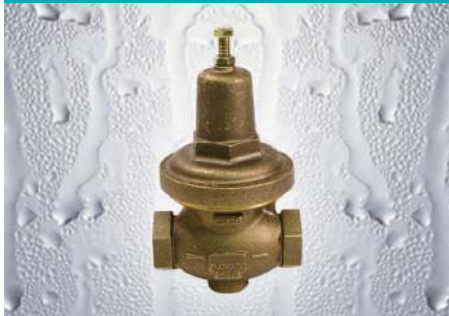

**PRESSURE REDUCING VALVE (PRV) - Model C150EHF** when properly installed will regulate high inlet pressure to a lower regulated outlet pressure within a range regardless of water flow. This is accomplished by an adjustable spring loaded balancing valve factory set to automatically regulate the downstream pressure.

High flow to 70 GPM

ASSE® Listed 1003

Temp Max: 180 °F (80 °C) Pressure Max: 400 PSI  
Factory set at 50 PSI

Part numbers are for 15 - 75 PSI range

SIZE	PART NO.	WGT.	LIST PRICE
1 1/4"	C150002EHF	5.2	\$ 1,089

Part numbers are for 15 - 150 PSI range

SIZE	PART NO.	WGT.	LIST PRICE
1 1/4"	C150102EHF	5.2	\$ 1,089

See 1 1/2" & 2" sizes model C150E.

**C150E** Discount Code **A**



**PRESSURE REDUCING VALVE (PRV) - Model C150E** when properly installed will regulate high inlet pressure to a lower regulated outlet pressure within a range regardless of water flow. This is accomplished by an adjustable spring loaded balancing valve factory set to automatically regulate the downstream pressure. Supplied with one FNPT tail-piece and union nut.

NSF/ANSI 61 Certified and ASSE® Listed 1003

Temp Max: 180 °F (80 °C) Pressure Max: 400 PSI  
Factory set at 50 PSI

Part numbers are for 15 - 75 PSI range

SIZE	PART NO.	WGT.	LIST PRICE
1/2"	C150099E	2.2	\$ 188
3/4"	C150000E	2.2	\$ 194
1"	C150001E	3.5	\$ 235
1 1/4"*	C150002E*	5.2	\$ 414
1 1/2"	C150003E	15	\$ 1,236
2"	C150004E	15	\$ 1,323


Part numbers are for 15 - 150 PSI range

SIZE	PART NO.	WGT.	LIST PRICE
1/2"	C150199E	2.2	\$ 188
3/4"	C150100E	2.2	\$ 194
1"	C150101E	3.5	\$ 235
1 1/4"*	C150102E*	5.2	\$ 414
1 1/2"	C150103E	15	\$ 1,236
2"	C150104E	15	\$ 1,323

\* Note: 1 1/4" size is one size smaller restricted flow. Maximum 25 GPM, see model C150EHF on left for higher capacity.

For double union add "U" to the end of the part number and add 10% to the list price.

**C150ET** Discount Code **A**

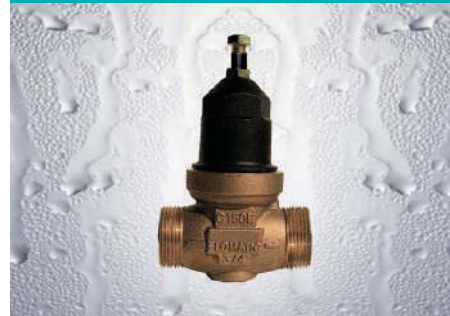

**PRESSURE REDUCING VALVE (PRV) - Model C150E** when properly installed will regulate high inlet pressure to a lower regulated outlet pressure within a range regardless of water flow. This is accomplished by an adjustable spring loaded balancing valve factory set to automatically regulate the downstream pressure.

NSF/ANSI 61 Certified and ASSE® Listed 1003

Temp Max: 180 °F (80 °C) Pressure Max: 400 PSI  
Factory set at 50 PSI

Part numbers are for 15 - 75 PSI range

SIZE	PART NO.	WGT.	LIST PRICE
3/4" F & 1" M	C150000ET	2.2	\$ 160
1" F & 1 1/4" M*	C150001ET*	3.5	\$ 206

Part numbers are for 15 - 150 PSI range

SIZE	PART NO.	WGT.	LIST PRICE
3/4" F & 1" M	C150100ET	2.2	\$ 160
1" F & 1 1/4" M*	C150101ET*	3.5	\$ 206

\* 1" NPT ID & 1 1/4" NPT OD-Dual Purpose Threads.

**PRODUCT SPECIFICATIONS**

- Max Pressure: 400 PSI (27 bar) • Max Temperature: 180 °F (80 °C)
- Pressure Regulating Setting: Factory set at 50 psi • Standard Spring Adjustment range see part number chart

Model	Description	End-Connections	
		Inlet	Outlet
<b>C150E</b>	<b>Unleaded Valve Body</b>	<b>Female NPT</b>	<b>Single Union End w/Female NPT</b>
<b>C150EU</b> (10% adder)	<b>Unleaded Valve Body</b>	<b>Union End w/Female NPT</b>	
<b>C150ET</b>	<b>Unleaded Valve Body</b>	<b>Female NPT/Male NPT (No union end)</b>	

# CONSTANT PRESSURE PUMP CONTROL

**⚠ FOR PRESSURE REDUCING VALVES SEE PG. 22 & 28**

## CYCLE GARD® I C152E

Discount Code **A**



**DIRECT ACTING CONSTANT PRESSURE PUMP CONTROL VALVE** - Reduces rapid pump cycling and maintains a pre-set operating pressure for pump systems. Threaded female x female connection. Features an unleaded body & composite bell housing, Nylon reinforced Buna-N diaphragm. Supplied with two FNPT tail piece and union nuts.

Temp Max: 180 °F (80 °C) Pressure Max: 400 PSI  
Factory set at 50 PSI

SIZE	PART NO.	SPRING RANGE	LIST PRICE
3/4"	C152000E	15 - 75 PSI	\$ 298
1"	C152001E	15 - 75 PSI	\$ 355
1 1/4"*	C152002E*	15 - 75 PSI	\$ 625
1 1/2"	C152003E	15 - 75 PSI	\$ 1,274
2"	C152004E	15 - 75 PSI	\$ 1,430
3/4"	C152100E	15 - 150 PSI	\$ 298
1"	C152101E	15 - 150 PSI	\$ 355
1 1/4"*	C152102E*	15 - 150 PSI	\$ 625
1 1/2"	C152103E	15 - 150 PSI	\$ 1,274
2"	C152104E	15 - 150 PSI	\$ 1,430

\*Note: 1 1/4" size is one size smaller restricted flow, maximum 20 GPM. See model C152EHF below for higher capacity.

## CYCLE GARD® HY-FLOW CB152EHF

Discount Code **A**




**HIGH FLOW DIRECT ACTING CONSTANT PRESSURE PUMP CONTROL VALVE** - Model C152EHF reduces rapid pump cycle with field adjustable by-pass and maintains a pre-set operating downstream pressure for pump systems. Threaded female x female NPT connection with hex end OD. Features an unleaded body and cover. Nylon reinforced Buna-N diaphragm. Ideal for flows up to 70 GPM.

Temp Max: 180 °F (80 °C) Pressure Max 400 PSI  
Factory set at 50 PSI

SIZE	PART NO.	SPRING RANGE	LIST PRICE
1 1/4"	C152002EHF	15 - 75 PSI	\$ 1,186
1 1/2"	C152102EHF	15 - 150 PSI	\$ 1,186

## CYCLE GARD® I C152ET

Discount Code **A**

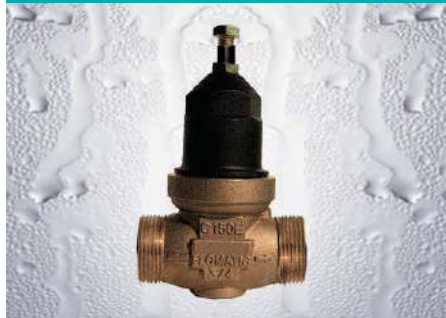

**DIRECT ACTING CONSTANT PRESSURE PUMP CONTROL VALVE** - Dual purpose threads, reduces rapid pump cycling and maintains a pre-set operating pressure for pump systems. 1" threaded female I.D. x 1 1/4" male O.D. on inlet and outlet connections. Features an unleaded body & composite bell housing, Nylon reinforced Buna-N diaphragm.

Temp Max: 180 °F (80 °C) Pressure Max: 400 PSI  
Factory set at 50 PSI

SIZE	PART NO.	SPRING RANGE	LIST PRICE
1"F & 1 1/4"M	C152001ET	15 - 75 PSI	\$ 329
1"F & 1 1/4"M	C152101ET	15 - 150 PSI	\$ 329

## CYCLE GARD® IV CB152ET / CB152E

Discount Code **A**



**DIRECT ACTING CONSTANT PRESSURE PUMP CONTROL VALVE WITH TAPPINGS** - Reduces rapid pump cycling and maintains a pre-set operating pressure for pump systems. Threaded female x female union ends or female I.D. & male O.D. on inlet and outlet connections. Features a flow efficient globe style unleaded alloy body & composite bell housing, Nylon reinforced Buna-N diaphragm. With two (2) 1/4" tappings for gage and pressure switch. One (1) 3/4" tapping for water tank. Model CB152E supplied with two FNPT tail-piece and union nuts.

Temp Max: 180 °F (80 °C) Pressure Max 400 PSI  
Factory set at 50 PSI

**Model CB152ET - Dual Purpose Threads**

SIZE	PART NO.	SPRING RANGE	LIST PRICE
1"F & 1 1/4" M	CB152001ET	15 - 75 PSI	\$ 386
1"F & 1 1/4" M	CB152101ET	15 - 150 PSI	\$ 386

**Model CB152E**

SIZE	PART NO.	SPRING RANGE	LIST PRICE
1"	CB152001E	15 - 75 PSI	\$ 379
1"	CB152101E	15 - 150 PSI	\$ 379

## CYCLE GARD® II CN101/CNA101

Discount Code **A**



**CONSTANT PRESSURE PUMP CONTROL** - Reduces rapid pump cycle with field adjustable by-pass and maintains a pre-set operating downstream pressure. For use with domestic water well, municipal water systems, industrial water system, irrigation and agriculture.

For angle body add "A" after "N" in the part number

Temp Max: 180 °F (80 °C) Pressure Max: 400 PSI  
Factory set at 60 PSI

SIZE	PART NO. THREADED	LIST PRICE	PART NO. FLANGED 150#	LIST PRICE
1 1/4"	CN1010B	\$ 2,889		
1 1/2"	CN1010C	\$ 2,940	CN1011C	\$ 3,146
2"	CN1010D	\$ 2,963	CN1011D	\$ 3,734
2 1/2"	CN1010E	\$ 3,689	CN1011E	\$ 3,917
3"	CN1010F	\$ 3,954	CN1011F	\$ 4,007
4"			CN1011G	\$ 5,152
6"			CN1011J	\$ 8,136
8"			CN1011K	\$ 13,644

## CYCLE GARD® IV CB152SST

Discount Code **A**



**DIRECT ACTING CONSTANT PRESSURE PUMP CONTROL VALVE WITH TAPPINGS** - Reduces rapid pump cycling and maintains a pre-set operating pressure for pump systems. NPT threaded 1" female I.D. and 1 1/4" male O.D. on inlet and outlet connections. Features a flow efficient globe style all stainless steel body & composite bell housing, Nylon reinforced Buna-N diaphragm. With two (2) 1/2" tappings for gage, pressure switch, and relief valve, and one (1) 3/4" tapping for water tank.

Temp Max: 180 °F (80 °C) Pressure Max 400 PSI  
Factory set at 50 PSI

Dual Purpose Threads

SIZE	PART NO.	SPRING RANGE	LIST PRICE
1"F & 1 1/4" M	CB152001SST	15 - 75 PSI	\$ 380
1"F & 1 1/4" M	CB152101SST	15 - 150 PSI	\$ 380

CONSTANT PRESSURE PUMP CONTROL VALVES 800.833.2040



**CYCLE GARD® CI  
CIN101** Discount Code **A**



**CONSTANT PRESSURE PUMP CONTROL VALVE**  
Reduces rapid pump cycle with field adjustable by-pass and maintains a pre-set operating downstream pressure. Ideal for irrigation, water wells and agriculture.

Temp Max: 180°F (80°C) Pressure Max 250 PSI  
Factory set at 50 PSI

SIZE	PART NO. THREADED	LIST PRICE
1 1/2"	CIN1020C	\$ 1,111
2"	CIN1020D	\$ 1,287

Max. pressure differential between inlet and outlet pressure 125 PSI. Consult factory for higher pressure differential.

**CYCLE GARD® CI<sup>2</sup>  
CIN101-2** Discount Code **A**



**CONSTANT PRESSURE PUMP CONTROL VALVE**  
Reduces rapid pump cycle and maintains a pre-set operating downstream pressure. Ideal for irrigation, water wells and agriculture. Built in by-pass at 5 GPM.

Temp Max: 180°F (80°C) Pressure Max 250 PSI  
Factory set at 50 PSI

SIZE	PART NO. THREADED	LIST PRICE
1 1/2"	CIN1020C2	\$ 995
2"	CIN1020D2	\$ 1,046

Max. pressure differential between inlet and outlet pressure 125 PSI. Consult factory for higher pressure differential.

**CYCLE GARD®  
C153S6** Discount Code **A**



**CONSTANT PRESSURE PUMP CONTROL VALVE**  
Reduces rapid pump cycling and maintains a preset system operating pressure independent from low or high flow conditions. Valve body is all stainless steel female NPT connection. The valve supports a hanging load up to 3,400 lbs. and fits in a 4" well casing. Dual purpose 1" female & 1 1/4" male design is rated for 1 - 20 GPM. The full port 1 1/4" female design is rated for 2 - 50 GPM.

Temp Max: 180°F Max shut off pressure: 150 PSI

**PLEASE NOTE:** The valve setting must be below the pressure switch off setting. Consult O&M manual for proper installation.

**40 PSI Configuration**

SIZE	PART NO.	BYPASS	LIST PRICE
1"F & 1 1/4"M	C153002S6A	1	\$ 348
1"F & 1 1/4"M*	C153002S6-3A*	3	\$ 348
1 1/4"F	C153003S6A	1	\$ 522
1 1/4"F*	C153003S6-3A*	3	\$ 522

**50 PSI Configuration**

SIZE	PART NO.	BYPASS	LIST PRICE
1"F & 1 1/4"M	C153002S6	1	\$ 348
1"F & 1 1/4"M*	C153002S6-3*	3	\$ 348
1 1/4"F	C153003S6	1	\$ 522
1 1/4"F*	C153003S6-3*	3	\$ 522

**60 PSI Configuration**

SIZE	PART NO.	BYPASS	LIST PRICE
1"F & 1 1/4"M	C153002S6B	1	\$ 348
1"F & 1 1/4"M*	C153002S6-3B*	3	\$ 348
1 1/4"F	C153003S6B	1	\$ 522
1 1/4"F*	C153003S6-3B*	3	\$ 522

**70 PSI Configuration**

SIZE	PART NO.	BYPASS	LIST PRICE
1"F & 1 1/4"M	C153002S6C	1	\$ 348
1"F & 1 1/4"M*	C153002S6-3C*	3	\$ 348

\*3 GPM bypass, recommended for 3 HP and 5 HP pump.

**BENEFITS AND FEATURES**

- ▶ Maintains a Constant Pressure
- ▶ Stops Pump from Cycling
- ▶ Hydraulically Operated (no electricity required)
- ▶ Extends the Life of the Pump
- ▶ Eliminates Effects of Water Hammer
- ▶ Many Models Available for Various Applications
- ▶ Easy to Install
- ▶ Field Adjustable
- ▶ Downsize the Tank
- ▶ Provides More Efficient Use of Appliances
- ▶ 3-Year Warranty

**SELF CLEANING**



- ▶ Slotted seat
- ▶ Self-cleaning
- ▶ No screen



FLOMATIC VALVES IS AN ACTIVE MEMBER IN THESE INDUSTRY ASSOCIATIONS AND OTHERS



**MINIAIR®** Discount Code **B**



**MINIAIR®** - Cast iron fusion bonded epoxy coated body-stainless steel trim. Threaded female x female connections. Stainless seat with Viton o-ring. Small orifice. Vents under line pressure.

Temp Max: 150°F (65°C) Inlet

Inlet Pressure MIN: 20 PSI\*  
Inlet Pressure MAX: 150 PSI\*

SIZE	OUTLET	PART NO.	WGT.	LIST PRICE
3/8"	3/8"	6500	7	\$ 213
1/2"	3/8"	6501	7	\$ 237
3/4"	3/8"	6502	7	\$ 263
1"	1/2"	6503	7	\$ 293
2"	1/2"	6504	45	\$ 904

CONSULT FACTORY for full line of sizes available.

**MAXIAIR®** Discount Code **B**



**MAXIAIR®** - Cast iron body-stainless steel trim. Threaded female x female connections. NITRILE (Buna-N) seat. Large orifice vents on filling- eliminates vacuum under pressure loss.

Temp Max: 150°F (65°C)

Inlet Pressure MIN: 20 PSI\*  
Inlet Pressure MAX: 150 PSI\*

SIZE	OUTLET	PART NO.	WGT.	LIST PRICE
1/2"	1/2"	6520	8	\$ 458
1"	1"	6521	16	\$ 596
2"	2"	6522	44	\$ 1,000
3"	3"	6523	75	\$ 1,451
4"	4"	6524	154	\$ 2,586
6"	6"	6525	174	\$ 3,602

CONSULT FACTORY for full line of sizes available.

**MINIAIR® AIS** Discount Code **B**



**MINIAIR® AIS** - Ductile iron fusion bonded epoxy coated body with two bolt access cover and stainless steel trim. Threaded female x female connections. Stainless seat with Viton o-ring. Small orifice. Vents under line pressure.

Temp Max: 150°F (65°C) Inlet

Inlet Pressure MIN: 20 PSI\*  
Inlet Pressure MAX: 150 PSI\*



SIZE	OUTLET	PART NO.	WGT.	LIST PRICE
3/8"	3/8"	3500	7	\$ 309
1/2"	3/8"	3501	7	\$ 313
3/4"	3/8"	3502	7	\$ 349
1"	1/2"	3503	7	\$ 391

CONSULT FACTORY for full line of sizes available.

**MAXIAIR® AIS** Discount Code **B**



**MAXIAIR® AIS** - Ductile iron fusion bonded epoxy coated body with two bolt access cover and stainless steel trim. Threaded female x female connections. NITRILE (Buna-N) seat. Large orifice vents on filling- eliminates vacuum under pressure loss.

Temp Max: 150°F (65°C)

Inlet Pressure MIN: 20 PSI\*  
Inlet Pressure MAX: 150 PSI\*



SIZE	OUTLET	PART NO.	WGT.	LIST PRICE
1/2"	1/2"	3520	8	\$ 573
1"	1"	3521	16	\$ 767

CONSULT FACTORY for full line of sizes available.

**WELLAIR®** Discount Code **B**



**WELLAIR®** - Similar to Maxiair® but features discharge throttling valve. Ideal for deep well applications.

Temp Max: 150°F (65°C)

Inlet Pressure MIN: 20 PSI\*  
Inlet Pressure MAX: 150 PSI\*

SIZE	OUTLET	PART NO.	WGT.	LIST PRICE
1/2"	1/2"	6560	8	\$ 789
1"	1"	6561	18	\$ 945
2"	2"	6562	50	\$ 1,349
3"	3"	6563	109	\$ 2,297

CONSULT FACTORY for full line of sizes available.

**COMBOAIR®** Discount Code **B**



**COMBOAIR®** - Cast iron body-stainless steel trim. Combines features of Miniair® and Maxiair® in one housing.

Temp Max: 150°F (65°C)

Inlet Pressure MIN: 20 PSI\*  
Inlet Pressure MAX: 150 PSI\*

SIZE	OUTLET	PART NO.	WGT.	LIST PRICE
1"	1"	6540	27	\$ 705
2"	2"	6541	72	\$ 1,215
3"	3"	6542	114	\$ 2,854
4"	4"	6543	177	\$ 3,649

CONSULT FACTORY for full line of sizes available.

**6BSE BUG SCREEN** Discount Code **B**



**6BSE BUG SCREEN** - Unleaded bronze body with threaded female connection. Plastic strainer for 1/2" size, stainless steel for 1" - 3", included with nipple for installation into air vent.

SIZE	PART NO.	WGT.	LIST PRICE
1/2"	4399E-1	0.2	\$ 28
1"	4301E-1	1.2	\$ 31
2"	4304E-1	2.8	\$ 82
3"	4306E-1	7.7	\$ 182

**All Air Release, Air & Vacuum and Universal Combination Valves meet or exceed AWWA C512 standards.**

**IF YOU REQUIRE ASSISTANCE ORDERING AIR RELEASE VALVES, PLEASE CONTACT OUR CUSTOMER SERVICE REPRESENTATIVES AT 800.833.2040**

**\*For alternate low or high pressure applications consult factory.**  
**Some valves are painted with TNEPEC red. Consult factory for fusion bonded epoxy coated option.**



**SEWAIR-MINI®** Discount Code **B**



**SEWAIR-MINI®** - Cast iron body, 303 stainless steel trim. Threaded female x female connections. NITRILE (Buna-N) seat. ¼" orifice-for waste water application. Vents under line pressure.

Temp Max: 150 °F (65 °C)

Inlet Pressure MIN: 20 PSI\*  
Inlet Pressure MAX: 150 PSI\*

SIZE	OUTLET	PART NO.	WGT.	LIST PRICE
2"	½"	6600	50	\$ 873
3"	½"	6601	70	\$ 1,292

CONSULT FACTORY for full line of sizes available.

For unit with backflush attachment, add "BF" to end of part number and add list price. See Backflush on this page.

For 316SS trim, add ST to the end of the part # and 20% to the list price.

**SEWAIR-MAXI®** Discount Code **B**



**SEWAIR-MAXI®** - Cast iron body, 303 stainless steel trim. Threaded female x female connections. NITRILE (Buna-N) seat. Large orifice-equals inlet size vents on filling. Eliminates vacuum in waste water pipeline under pressure loss.

Temp Max: 150 °F (65 °C)

Inlet Pressure MIN: 20 PSI\*  
Inlet Pressure MAX: 150 PSI\*

SIZE	OUTLET	PART NO.	WGT.	LIST PRICE
2"	1"	6620	50	\$ 1,103
2"	2"	6621	82	\$ 2,086
3"	3"	6622	85	\$ 2,632
4"	4"	6623	120	\$ 3,534
6"	6"	6624	210	\$ 5,928

CONSULT FACTORY for full line of sizes available.

For unit with backflush attachment, add "BF" to end of part number and add list price. See Backflush on this page.

**FEATURES AND BENEFITS**

- ▶ Automatic
- ▶ Improves Flow & Pump Efficiency
- ▶ Eliminates Restrictive Air or Gas Pockets
- ▶ Saves Energy
- ▶ Protects Against Vacuum
- ▶ Long Body Protects Orifice From Sewage
- ▶ Compliance with AWWA C512



**SEWAIR-DUAL®** Discount Code **B**



**SEWAIR-DUAL®** - Cast iron body, 303 stainless steel trim. NITRILE (Buna-N) seat. Provides protection of both small and large orifices. Two body construction.

Temp Max: 150 °F (65 °C)

Inlet Pressure MIN: 20 PSI\*  
Inlet Pressure MAX: 150 PSI\*

SIZE	OUTLET	PART NO.	WGT.	LIST PRICE
2"	1"	6640	120	\$ 3,516
2"	2"	6641	150	\$ 4,000

CONSULT FACTORY for full line of sizes available.

For unit with backflush attachment, add "BF" to end of part number and add list price. See Backflush on this page.

**SEWAIR-COMBO®** Discount Code **B**



**SEWAIR-COMBO®** - Cast iron body, 303 stainless steel trim. NITRILE (Buna-N) seat. Provides same protection as Sewair-Dual®, but combines into one body.

Temp Max: 150 °F (65 °C)

Inlet Pressure MIN: 20 PSI\*  
Inlet Pressure MAX: 150 PSI\*

SIZE	OUTLET	PART NO.	WGT.	LIST PRICE
2"	1"	6650	80	\$ 2,117
2"	2"	6651	110	\$ 3,181
3"	3"	6652	145	\$ 4,316

CONSULT FACTORY for full line of sizes available.

For unit with backflush attachment, add "BF" to end of part number and add list price. See Backflush on this page.

**BACKFLUSH®** Discount Code **B**



**BACKFLUSH®** - Fabric reinforced NITRILE (Buna-N) hose with bronze shut off valves and galvanized quick disconnects. Designed for pressure backflush Sewair models.

INLET	PART NO.	WGT.	LIST PRICE
2"	BF2	12	\$ 631
3"	BF3	19	\$ 809

CONSULT FACTORY for full line of sizes available.

**\*For alternate low or high pressure applications consult factory.**

**Some valves are painted with TNEPEC red. Consult factory for fusion bonded epoxy coated option.**

# Glen-Flo® Backflow Products

**GFAVB** Discount Code **C**



**ATMOSPHERIC VACUUM BREAKER** - Designed to prevent back-siphonage. Not for potable water.

Temp Max: 180°F (80°C) Pressure Max: 125 PSI  
Complies with ASSE 1001

SIZE	PART NO.	WGT.	LIST PRICE
½"	GF3599	1	\$ 63
¾"	GF3500	2	\$ 76
1"	GF3501	2	\$ 110

**GF8080E** Discount Code **C**



**UNLEADED DUAL CHECK VALVE** - Brass body with single union.

Temp Max: 180°F (80°C) Pressure Max: 150 PSI  
Complies with ASSE 1024

SIZE	PART NO.	WGT.	LIST PRICE
½"	GF8089E	2	\$ 80
¾"	GF8080E	2	\$ 87
1"	GF8081E	2	\$ 102

Add "FC" to end of part number for copper sweat connection.  
Note: Consult factory for additional connection configurations.

**GF8080S6** Discount Code **C**



**DUAL CHECK VALVE** - 316 stainless steel body with single union.

Temp Max: 180°F (80°C) Pressure Max: 175 PSI  
Complies with ASSE 1024

SIZE	PART NO.	WGT.	LIST PRICE
¾"	GF8080S6	1.4	\$ 170
1"	GF8081S6	1.4	\$ 177
1 ¼"*	GF8082S6*	2.2	\$ 265

\*Not ASSE approved

**GFHB8** Discount Code **C**



**HOSE CONNECTION VACUUM BREAKERS** - Designed to prevent back-siphonage or backflow of water, with vandal resistant features.

Temp Max: 180°F (80°C) Pressure Max: 125 PSI  
Complies with ASSE 1011

SIZE	PART NO.	WGT.	LIST PRICE
¾"	GF800E	.21	\$ 21

**GF8200** Discount Code **C**



**DUAL CHECK with ATMOSPHERIC VENT** - Continuous pressure backflow preventer with an intermediate atmospheric vent, with double union ends. Complies with ASSE 1012, not for potable water.

Temp Max: 210°F (98C) Pressure Max: 175 PSI

SIZE	PART NO.	WGT.	LIST PRICE
¾"	GF8280	1.3	\$ 107

Note: Consult factory for additional connection configurations.


**VISIT OUR WEBSITE AT  
WWW.FLOMATIC.COM  
OR CALL 800.833.2040**

BACKFLOW PREVENTERS 800.833.2040



## AWWA C515 Gate Valves

### 115FL

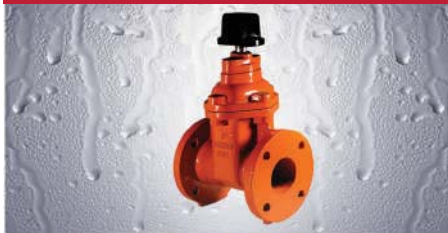Discount Code **C**


**FLANGED** - Ductile iron resilient wedge gate valves which meet AWWA C515 standard, with stainless steel stem, class 150.

Temp Max: 140 °F (60 °C)

Pressure Max: 250 PSI

SIZE	PART NO.	WGT.	LIST PRICE
2"	8560	28	\$ 380
2 1/2"	8561	38	\$ 383
3"	8562	56	\$ 463
4"	8563	78	\$ 647
6"	8564	138	\$ 1,155
8"	8565	214	\$ 1,799
10"	8566	360	\$ 2,522
12"	8567	531	\$ 3,805
14"	8568	547	\$ 6,829
16"	8569	719	\$ 7,817

### 115PO

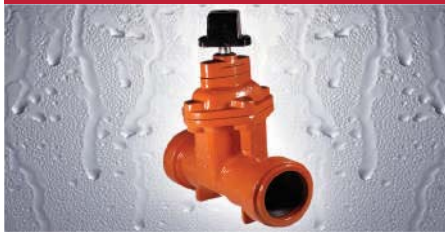Discount Code **C**


**PUSH-ON** - Ductile iron resilient wedge gate valves which meet AWWA C515 standard, with stainless steel stem. Ring-type (push-on PVC pipe).

Temp Max: 140 °F (60 °C)

Pressure Max: 250 PSI

SIZE	PART NO.	WGT.	LIST PRICE
2"	8560RT	28	\$ 328
2 1/2"	8561RT	42	\$ 359
3"	8562RT	44	\$ 450
4"	8563RT	69	\$ 612
6"	8564RT	119	\$ 1,153
8"	8565RT	203	\$ 1,860
10"	8566RT	278	\$ 2,893
12"	8567RT	421	\$ 4,503

### 115MJ

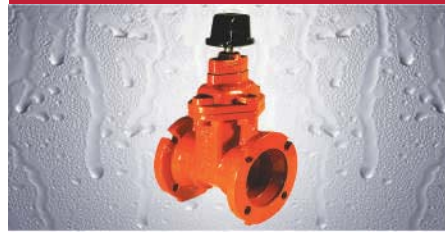Discount Code **C**

**MECHANICAL JOINT** - Ductile iron resilient wedge gate valves which meet AWWA C515 standard, with stainless steel stem, class 150, MJ flange.

Temp Max: 140 °F (60 °C)

Pressure Max: 250 PSI


SIZE	PART NO.	WGT.	LIST PRICE
2"	8560MJ	28	\$ 355
3"	8562MJ	44	\$ 592
4"	8563MJ	69	\$ 741
6"	8564MJ	119	\$ 1,329
8"	8565MJ	203	\$ 2,150
10"	8566MJ	278	\$ 3,157
12"	8567MJ	421	\$ 4,415
16"	8569MJ	656	\$ 6,911

**2" operating nut standard on all C515 Gate Valves**

**For hand wheel add "HW" to the end of the part number and add 15% to list**

## AWWA C515 Gate Valves

### 115NPT

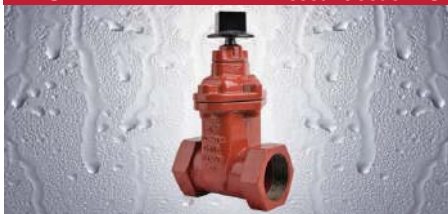Discount Code **C**

**THREADED** - Ductile iron resilient wedge valve which meet AWWA 515 standard with SS stem with NPT threaded connections.

Temp Max: 140 °F (60 °C)

Pressure Max: 250 PSI

SIZE	PART NO.	WGT.	LIST PRICE
2"	8560NPT	20	\$ 297
3"	8562NPT	32	\$ 473
4"	8563NPT	47	\$ 632
6"	8564NPT	85	\$ 1,148

### 1090SY

Discount Code **C**

**OUTSIDE SCREW & YOKE** - Cast iron resilient wedge gate valves which meet AWWA C509 standard with bronze stem and are UL/FM listed, class 125.


Temp Max: 140 °F (60 °C)

Pressure Max: 175 PSI

Tapped &amp; plugged

SIZE	PART NO.	WGT.	LIST PRICE
2 1/2"	84610SY	55	\$ 1,564
3"	84620SY	74	\$ 1,825
4"	84630SY	103	\$ 2,394
6"	84640SY	158	\$ 3,801
8"	84650SY	240	\$ 5,447
10"	84660SY	392	\$ 8,542

### 109NRS

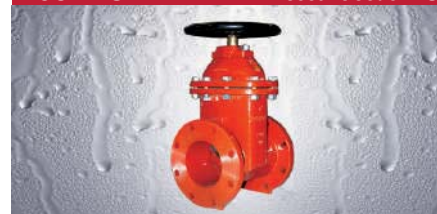Discount Code **C**

**FLANGED** - Ductile iron resilient wedge gate valves which meet AWWA C509 standard with bronze stem, class 150.

Temp Max: 140 °F (60 °C)

Pressure Max: 250 PSI

Tapped &amp; plugged

SIZE	PART NO.	WGT.	LIST PRICE
2 1/2"	8461	51	\$ 873
3"	8462	67	\$ 1,012
4"	8463	88	\$ 1,114
6"	8464	138	\$ 1,709
8"	8465	214	\$ 2,549
10"	8466	360	\$ 3,758
12"	8467	531	\$ 4,729

**All gate valves standard open left. Consult factory for right hand opening.**

**FLOMATIC VALVES IS AN ACTIVE MEMBER IN THESE INDUSTRY ASSOCIATIONS AND OTHERS**



# FLOMATIC SALES REPS

## UNITED STATES

STATE	DOMESTIC WATER SYSTEMS	EMAIL	INDUSTRIAL	EMAIL	MUNICIPAL	EMAIL
Alabama	H2O Reps	grehg2orep@bellsouth.net	H2O Reps	grehg2orep@bellsouth.net	H2O Reps	grehg2orep@bellsouth.net
Alaska	Pacific NW Sales	pnws@msn.com	Pacific NW Sales	pnws@msn.com	Pacific NW Sales	pnws@msn.com
Arizona	Desert Pacific Sales	pyama.dps@gmail.com	Desert Pacific Sales	pyama.dps@gmail.com	Desert Pacific Sales	pyama.dps@gmail.com
Arkansas	DJC Sales	sales@dcsalesco.com	Flomatic	fromatic@fromatic.com	Flomatic	fromatic@fromatic.com
California	Desert Pacific Sales	pyama.dps@gmail.com	Desert Pacific Sales	pyama.dps@gmail.com	Desert Pacific Sales	pyama.dps@gmail.com
Colorado	Maples Sales & Service	gmaples@maplesales.com	Maples Sales & Service	gmaples@maplesales.com	Maples Sales & Service	gmaples@maplesales.com
Connecticut	Harmon & Co	greg.harmonco@gmail.com	Harmon & Co	greg.harmonco@gmail.com	Harmon & Co	greg.harmonco@gmail.com
Delaware	Hasco Sales	margo@hascosales.net	Hasco Sales	margo@hascosales.net	Hasco Sales	margo@hascosales.net
D.C	Hasco Sales	margo@hascosales.net	Hasco Sales	margo@hascosales.net	Hasco Sales	margo@hascosales.net
Florida	Welty Inc	dgwelte@gmail.com	Specified Sales Associates	info@ssafla.com	Specified Sales Associates	info@ssafla.com
Georgia	H2O Reps	grehg2orep@bellsouth.net	H2O Reps	grehg2orep@bellsouth.net	H2O Reps	grehg2orep@bellsouth.net
Hawaii	Hawaii Engineering	info@hiengineering.com	Hawaii Engineering	info@hiengineering.com	Hawaii Engineering	info@hiengineering.com
Idaho	Pacific NW Sales	pnws@msn.com	Pacific NW Sales	pnws@msn.com	Pacific NW Sales	pnws@msn.com
Illinois - North	Rep Rite Burk	jvalentine@repriteburk.com	Rep Rite Burk	pwil@repriteburk.com	Rep Rite Burk	pwil@repriteburk.com
- South	GeoStarr Marketing	rick@geostarr.com	GeoStarr Marketing	rick@geostarr.com	Flomatic	fromatic@fromatic.com
Indiana	Watermark Engineered	bboyer@watermarkeps.com	Watermark Engineered	bboyer@watermarkeps.com	Watermark Engineered	bboyer@watermarkeps.com
Iowa	GeoStarr Marketing	rick@geostarr.com	GeoStarr Marketing	rick@geostarr.com	Flomatic	fromatic@fromatic.com
Kansas	GeoStarr Marketing	rick@geostarr.com	GeoStarr Marketing	rick@geostarr.com	Flomatic	fromatic@fromatic.com
Kentucky	Watermark Engineered	bboyer@watermarkeps.com	Watermark Engineered	bboyer@watermarkeps.com	Watermark Engineered	bboyer@watermarkeps.com
Louisiana	DJC Sales	sales@dcsalesco.com	DJC Sales	sales@dcsalesco.com	Flomatic	fromatic@fromatic.com
Maine	Harmon & Co	greg.harmonco@gmail.com	Harmon & Co	greg.harmonco@gmail.com	Harmon & Co	greg.harmonco@gmail.com
Maryland	Hasco Sales	margo@hascosales.net	Hasco Sales	margo@hascosales.net	Hasco Sales	margo@hascosales.net
Massachusetts	Harmon & Co	greg.harmonco@gmail.com	Harmon & Co	greg.harmonco@gmail.com	Harmon & Co	greg.harmonco@gmail.com
Michigan	Herder Sales	therder@herdersales.com	RS Controls	rscontrols@rscontrols.com	RS Controls	rscontrols@rscontrols.com
Minnesota	Rep Rite Burk	bcutter@repriteburk.com	Rep Rite Burk	bcutter@repriteburk.com	Rep Rite Burk	bcutter@repriteburk.com
Mississippi	Flomatic	fromatic@fromatic.com	Flomatic	fromatic@fromatic.com	Flomatic	fromatic@fromatic.com
Missouri	GeoStarr Marketing	rick@geostarr.com	GeoStarr Marketing	rick@geostarr.com	GeoStarr Marketing	rick@geostarr.com
Montana	Pacific NW Sales	pnws@msn.com	Pacific NW Sales	pnws@msn.com	Pacific NW Sales	pnws@msn.com
Nebraska	GeoStarr Marketing	rick@geostarr.com	GeoStarr Marketing	rick@geostarr.com	Flomatic	fromatic@fromatic.com
Nevada	Desert Pacific Sales	pyama.dps@gmail.com	Desert Pacific Sales	pyama.dps@gmail.com	Desert Pacific Sales	pyama.dps@gmail.com
New Hampshire	Harmon & Co	greg.harmonco@gmail.com	Harmon & Co	greg.harmonco@gmail.com	Harmon & Co	greg.harmonco@gmail.com
New Jersey - North	Advanced Hydronics	sales@ahreps.com	Advanced Hydronics	sales@ahreps.com	Advanced Hydronics	sales@ahreps.com
- South	Hasco Sales	margo@hascosales.net	Hasco Sales	margo@hascosales.net	Hasco Sales	margo@hascosales.net
New Mexico	Maples Sales & Service	gmaples@maplesales.com	Maples Sales & Service	gmaples@maplesales.com	Maples Sales & Service	gmaples@maplesales.com
New York	Group One	groupone_ne@yahoo.com	Group One	groupone_ne@yahoo.com	Group One	groupone_ne@yahoo.com
- NYC & Long Island	Advanced Hydronics	sales@ahreps.com	Advanced Hydronics	sales@ahreps.com	Advanced Hydronics	sales@ahreps.com
North Carolina	Lewis Marketing	glenn@lewismarketinginc.com	Lewis Marketing	glenn@lewismarketinginc.com	Lewis Marketing	glenn@lewismarketinginc.com
North Dakota	Rep Rite Burk	apcutter@repriteburk.com	Rep Rite Burk	apcutter@repriteburk.com	Rep Rite Burk	apcutter@repriteburk.com
Ohio - North	WYNN Enterprise, LLC	wynnl@wynnenterprisellc.com	WYNN Enterprise, LLC	wynnl@wynnenterprisellc.com	Daman Superior	rstummer@damansuperior.com
- South	WYNN Enterprise, LLC	wynnl@wynnenterprisellc.com	WYNN Enterprise, LLC	wynnl@wynnenterprisellc.com	WYNN Enterprises	wynnl@wynnenterprisellc.com
Oklahoma	DJC Sales	sales@dcsalesco.com	DJC Sales	sales@dcsalesco.com	Flomatic	fromatic@fromatic.com
Oregon	Pacific NW Sales	pnws@msn.com	Pacific NW Sales	pnws@msn.com	Pacific NW Sales	pnws@msn.com
Pennsylvania - West	WYNN Enterprise, LLC	wynnl@wynnenterprisellc.com	WYNN Enterprise, LLC	wynnl@wynnenterprisellc.com	WYNN Enterprises	wynnl@wynnenterprisellc.com
- East	Hasco Sales	margo@hascosales.net	Hasco Sales	margo@hascosales.net	Hasco Sales	margo@hascosales.net
Rhode Island	Harmon & Co	greg.harmonco@gmail.com	Harmon & Co	greg.harmonco@gmail.com	Harmon & Co	greg.harmonco@gmail.com
South Carolina	Lewis Marketing	glenn@lewismarketinginc.com	Lewis Marketing	glenn@lewismarketinginc.com	Lewis Marketing	glenn@lewismarketinginc.com
South Dakota	Rep Rite Burk	apcutter@repriteburk.com	Rep Rite Burk	apcutter@repriteburk.com	Rep Rite Burk	apcutter@repriteburk.com
Tennessee	H2O Reps	grehg2orep@bellsouth.net	H2O Reps	grehg2orep@bellsouth.net	H2O Reps	grehg2orep@bellsouth.net
Texas	DJC Sales	sales@dcsalesco.com	DJC Sales	sales@dcsalesco.com	TLP Solutions	inquiries@tplsolutions.net
Utah	Flo-Tech	rbw@fitechinc.biz	Flo-Tech	rbw@fitechinc.biz	Flo-Tech	rbw@fitechinc.biz
Vermont	Harmon & Co	greg.harmonco@gmail.com	Harmon & Co	greg.harmonco@gmail.com	Harmon & Co	greg.harmonco@gmail.com
Virginia	Hasco Sales	margo@hascosales.net	Hasco Sales	margo@hascosales.net	Hasco Sales	margo@hascosales.net
Washington	Pacific NW Sales	pnws@msn.com	Pacific NW Sales	pnws@msn.com	Pacific NW Sales	pnws@msn.com
West Virginia	WYNN Enterprise, LLC	wynnl@wynnenterprisellc.com	WYNN Enterprise, LLC	wynnl@wynnenterprisellc.com	WYNN Enterprises	wynnl@wynnenterprisellc.com
Wisconsin	Rep Rite Burk	jvalentine@repriteburk.com	Rep Rite Burk	pwil@repriteburk.com	Rep Rite Burk	pwil@repriteburk.com
Wyoming	Maples Sales & Service	gmaples@maplesales.com	Maples Sales & Service	gmaples@maplesales.com	Maples Sales & Service	gmaples@maplesales.com

## CANADA

Alberta	Fluid Agency's	fluidagencys1@gmail.com	Fluid Agency's	fluidagencys1@gmail.com	Fluid Agency's	fluidagencys1@gmail.com
British Columbia	Fluid Agency's	fluidagencys1@gmail.com	Fluid Agency's	fluidagencys1@gmail.com	Fluid Agency's	fluidagencys1@gmail.com
Manitoba	Quadra Sales	orders@quadratesales.ca	Quadra Sales	orders@quadratesales.ca	Quadra Sales	orders@quadratesales.ca
NS, NB, PE, NFLD	Flomatic	fromatic@fromatic.com	Flomatic	fromatic@fromatic.com	Flomatic	fromatic@fromatic.com
Ontario	Trison Sales	sales@trisonsales.com	Trison Sales	sales@trisonsales.com	Trison Sales	sales@trisonsales.com
Quebec	Nimatec	nimatec@nimatec.com	Nimatec	nimatec@nimatec.com	Nimatec	nimatec@nimatec.com
Saskatchewan	Quadra Sales	orders@quadratesales.ca	Quadra Sales	orders@quadratesales.ca	Quadra Sales	orders@quadratesales.ca

## LATIN AMERICA

LATIN AMERICA	MA Trading	latino@fromatic.com	MA Trading	latino@fromatic.com	MA Trading	latino@fromatic.com
---------------	------------	---------------------	------------	---------------------	------------	---------------------

FOR LISTING OF WORLDWIDE FLOMATIC SALES REP, VISIT OUR WEBSITE: WWW.FLOMATIC.COM



## 8 WAYS YOU CAN REACH US...

<b>1. SALES &amp; ORDER DESK</b>	<b>800-833-2040 Press 2</b>	<b>We love to help you with new orders and inquiries.</b>
<b>2. TECH SUPPORT</b>	<b>800-833-2040 Press 4</b>	<b>Our engineers are on stand-by for application/product support.</b>
<b>3. MARKETING DEPT.</b>	<b>800-833-2040 Press 3</b>	<b>Use this line to reach the sales &amp; marketing group.</b>
<b>4. E-MAIL ORDERS</b>	<b>orders@flomatic.com</b>	<b>Quick and easy. Send us a message and communicate with us.</b>
<b>5. FAX ORDERS</b>	<b>800-314-3155 or 518-761-9798</b>	<b>A convenient way to fax us your orders and inquiries.</b>
<b>6. WEB SITE</b>	<b>www.flomatic.com</b>	<b>Our website will help you get the latest information on Flomatic.</b>
<b>7. PHONE</b>	<b>800-833-2040 or 518-761-9797</b>	<b>If you are out of the country or can't get through, try this line.</b>
<b>8. U.S. Mail</b>	<b>15 Pruyn's Island Drive Glens Falls, NY 12801-4424</b>	<b>Put it in an envelope and lick a stamp, it's that easy.</b>

FOLLOW US ON:



## FLOMATIC® CONDITIONS OF SALE

## STANDARD TERMS OF SALE

## PRICE

Prices at date of shipment will apply. Prices are subject to change without notice.

## ACCEPTANCE

Orders are accepted subject to approval of credit. Delivery is subject to strikes, accidents, or other causes beyond our control.

## ERRORS, SHORTAGES, ETC.

All claims for errors, shortages, damages, etc. must be made within 10 days of delivery.

## CANCELLATIONS OF ORDERS

Orders for standard catalog products may be canceled only if notice is received prior to the date of shipment.

## RETURNS

Merchandise in new and salable condition may be returned within one year after purchase on a freight prepaid basis for credit upon return authorization approval number, subject to inspection and acceptance at our plant. A 25% restocking charge and original freight allowance, if any, will be deducted from the credit. Special order products are nonreturnable, or at manufacturer's option.

**MINIMUM NET ORDER**  
**\$75.00**

**STANDARD TERMS**  
**1% ten days, net 30**

**FREIGHT ALLOWANCE**  
**A & C Code \$1,500**  
**B Code F.O.B Factory**

Discount does not apply to freight or miscellaneous charges.

## WARRANTIES

## LIMITED ONE (1)-YEAR WARRANTY (Complete Product Line)

Flomatic® Corporation warrants that its products are free from defects in materials and workmanship. Flomatic® will replace any valve covered by this warranty that is found to be defective within one year, unless otherwise stated below, from the time of sale. This warranty will be void if the product has been modified in any way by the purchaser, or is subjected to unreasonable use.

## LIMITED THREE (3)-YEAR WARRANTY (Automatic Control Valves)

Flomatic® Corporation warrants that its Automatic Control Valves are free from defects in materials and workmanship for the period of three (3) years after shipment. Flomatic® will repair or replace any parts or components that are found to be defective within three years from the time of its shipment. Components utilized by Flomatic® but manufactured by others will be warranted only to the extent of the guarantee of that manufacturer. This warranty will be void if the valve or its controls have been modified without factory authorization or if it is subjected to unusual operating conditions or if it is used for an application other than which it is intended which were not described or specified at the time of purchase.

**LIMITED FIVE (5)-YEAR WARRANTY (Enviro Check® and Enviro Foot Valves)** Flomatic® warrants that its ENVIRO-CHECK® AND FOOT VALVES, in all sizes up to 4", are free from defects in materials and workmanship. Flomatic® will replace, upon return authorization approval number, any ENVIRO CHECK® OR ENVIRO FOOT VALVE covered by this warranty that is found to be defective within five years from the time of sale. This warranty will be void if the product has been modified in any way by the purchaser, or is subjected to unreasonable use. These limited warranties extend to the original purchase from Flomatic® only; they do not extend to any other purchaser or transferee.

## EXCLUSION OF WARRANTIES

Flomatic® makes no warranties, expressed or implied, with respect to its valves, other than the expressed limited warranties described herein. The implied warranties of merchantability and fitness for a particular purpose are hereby disclaimed by Flomatic®. There are no warranties that extend beyond the description on the face hereof.

**WARNING-NOT DESIGNED, INTENDED OR PERMITTED IN NUCLEAR FACILITY APPLICATIONS. FLOMATIC® VALVES ARE NOT DESIGNED OR ENGINEERED FOR USE IN ANY NUCLEAR FACILITY OR IN CONJUNCTION WITH ANY NUCLEAR FACILITY OR SUPPORT FACILITY. USE OF ANY OF FLOMATIC'S PRODUCTS IN ANY SUCH APPLICATION IS A MISUSE OF THESE PRODUCTS AND VOIDS ALL WARRANTIES CONTAINED HEREIN, EXPRESSED AND IMPLIED, OF MERCHANTABILITY AND FITNESS FOR PARTICULAR PURPOSE.**

## EXCLUSION OF INCIDENTAL AND CONSEQUENTIAL DAMAGES

In no event shall Flomatic® be liable for incidental or consequential damages, including but without limitation, damages of personal injuries resulting from the negligence of Flomatic®, which may arise from the manufacture, sale, purchase and /or use of Flomatic® valves. It being intended that purchaser's exclusive remedy is limited to replacement of defective products. Some states do not allow the exclusion or limitation of incidental or consequential damages, or limitation on how long an implied warranty lasts, so that the above limitations may not apply to you. Contact your distributor or Flomatic® at address shown if you have any questions about the coverage of this warranty or service under this warranty. This warranty gives you specific legal rights, and you may have other rights which vary from state to state.

**NOTE:** Flomatic® reserves the right the change and/or alter valve products without prior notice. Consult factory for valve specifications.





# FLOMATIC® VALVES

Flomatic can accept no responsibility for possible errors in catalogs, brochures, and other printed material. Flomatic reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without sub-sequential changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies.

15 Pruyn's Island Drive  
Glens Falls, N.Y. 12801  
800-833-2040  
518-761-9797 • Fax 518-761-9798  
[www.flomatic.com](http://www.flomatic.com)  
e-mail: [flomatic@flomatic.com](mailto:flomatic@flomatic.com)

## DISTRIBUTION BY:

This book is covered under patent numbers 4,757,974/ 4,849,041/ 6,024,121/  
6,581,633/ 4,971,093/ 9,879,791/ 10,781,662/ 7,128,088/ D718,429/ 8,978,696/  
9,032,992/ 9,611,948 and other patents.

©2021 Flomatic Corporation

YPRICE21 7.5M