WC105 & WC207 Ames/Watts Check Tool

Ames Models:

2 ¹/₂" - 4" C200(A), C300(A), C400, C500 2 ¹/₂" - 3" M200(A), M300(A), M400, M500 Watts Models: 2 ¹/₆" - 4" 757(A), 757(A)DCDA

2 ½" – 4" 757(A), 757(A)DCDA 957, 957DCDA

WC207 Works On:

Ames Models:

6" - 10" C200(A), C300(A), C400, C500

4" - 10" M200(A), M300(A), M400, M500 Watts Models:

6" - 10" 757(A), 757(A)DCDA 957, 957DCDA




Use: Check valve compression/ disc replacement.

Install tool by attaching screw and wing nut to open hole on linkage.

The claw arm will rest on the outside of the check body opposite of the hinge

Tighten tool just enough until there is no tension on the clapper plate.



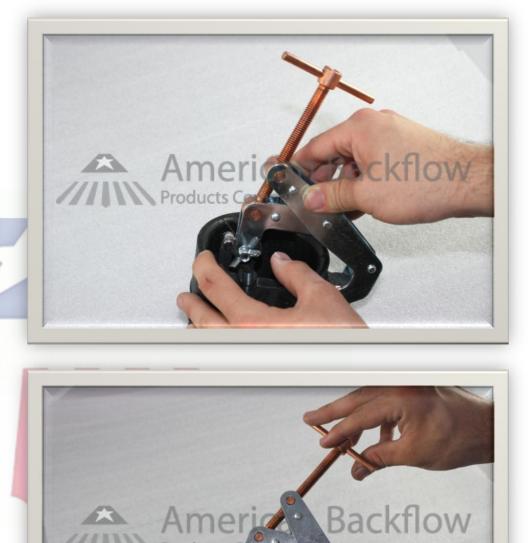

Remove "E"-clip and pin connecting the linkage.



The clapper will open with no tension



